

IQ2500V, IQ3500V AND IQ4500V SPEC DRAWINGS REV 1 480-400VAC

IQ2500V

COOLING CAPACITY: 2500 BTUH @125°F
 MAXIMUM AMPS: 1.7/1.9 @480V 60/50HZ
 MAXIMUM AMPS: 2.0/2.2 @400V 60/50HZ
 MAXIMUM OPERATING TEMP.: 125°F
 DIMENSIONS: 32.53"H X 19.25"W X 6.38"D
 WEIGHT 86 LBS


IQ3500V

COOLING CAPACITY: 3500 BTUH @125°F
 MAXIMUM AMPS: 2.1/2.3 @480V 60/50HZ
 MAXIMUM AMPS: 2.5/2.7 @400V 60/50HZ
 MAXIMUM OPERATING TEMP.: 125°F
 DIMENSIONS: 32.53"H X 19.25"W X 6.38"D
 WEIGHT 86 LBS

IQ4500V

COOLING CAPACITY: 4500 BTUH @125°F
 MAXIMUM AMPS: 2.3/2.5 @480V 60/50HZ
 MAXIMUM AMPS: 2.6/2.9 @400V 60/50HZ
 MAXIMUM OPERATING TEMP.: 125°F
 DIMENSIONS: 32.53"H X 19.25"W X 6.38"D
 WEIGHT 86 LBS


IQ2500V
 IQ3500V
 IQ4500V
 TOP VIEW



IQ2500V
 IQ3500V
 IQ4500V
 LEFT SIDE

IQ2500V
 IQ3500V
 IQ4500V
 FRONT VIEW

IQ2500V
 IQ3500V
 IQ4500V
 RIGHT SIDE

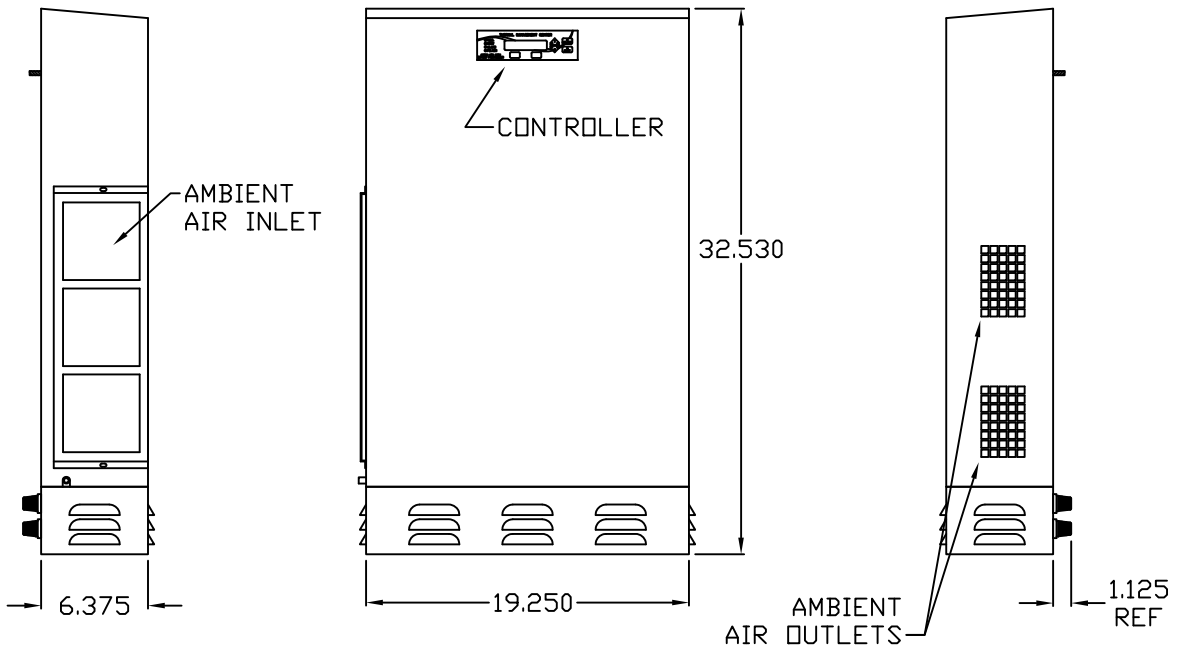


PROPRIETARY DRAWING
 THIS DRAWING IS THE PROPERTY OF ICE
 CUBE, INC. AND IS NOT TO BE REPLICATED
 OR ALTERED WITHOUT AUTHORIZATION OF
 ICE CUBE, INC.


DRAWN: J.J.H. SCALE: NONE
 DATE: 3-1-10
 SHEET 2 OF 2

	INDUSTRIAL COOLING EQUIPMENT 141 WILSON AVENUE GREENSBURG, PA 15601 724-837-8204 • 1-888-867-8234 FAX: 724-837-2086
	IQ25,35,4500V 480-400VAC
IQ300228	1


IQ2500V
IQ3500V
IQ4500V
REAR VIEW

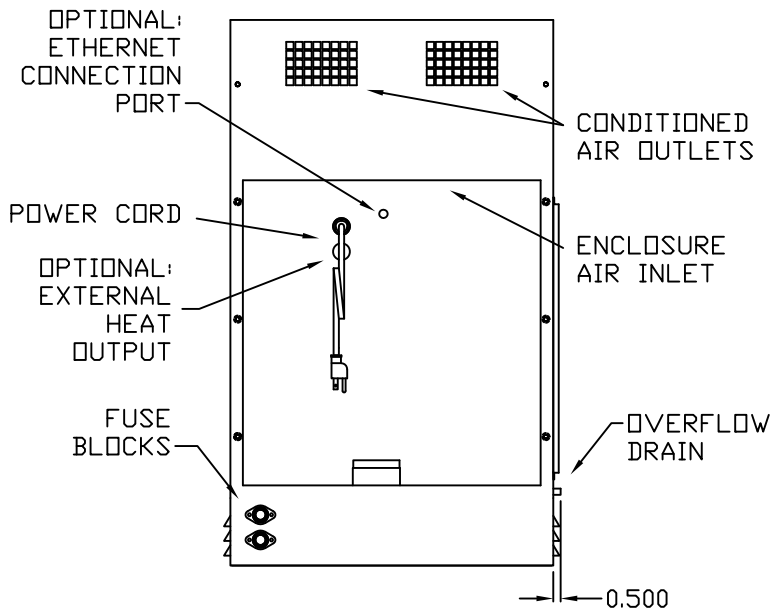

IQ2500V
IQ3500V
IQ4500V
480-400VAC
CUTOUT
DRAWING

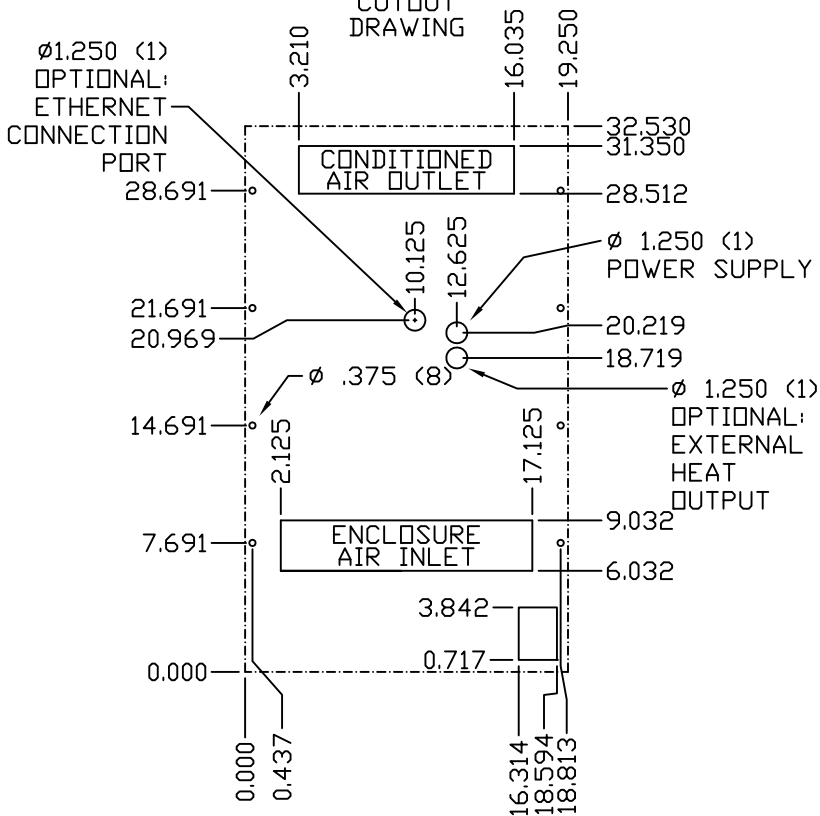

IQ2500V
IQ3500V
IQ4500V
480-400VAC
GASKET DRAWING

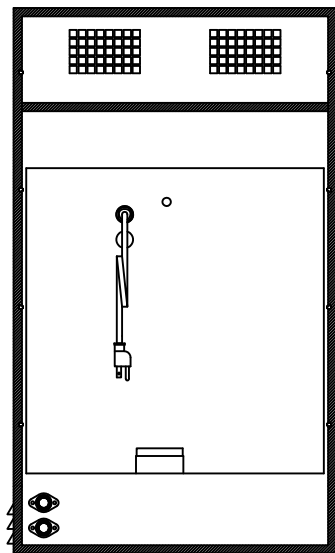

IMPORTANT
GASKET MUST BE
APPLIED AS SHOWN
FOR PROPER OPERATION
AND TO MAINTAIN
NEMA INTEGRITY.

1	ADDED FUSE BLOCKS AND RECT FOR CUTOUT, ADDED ETRNET CONN PORT, 18.813 WAS 18.916 4500V 480V 60HZ AMPS: 2.3 WAS 2.2	6-8-11	JJH
0	INITIAL RELEASE	3-1-10	JJH
REV	DESCRIPTION	DATE	CHECKED
	REVISIONS		

PROPRIETARY DRAWING
THIS DRAWING IS THE PROPERTY OF ICE
CUBE, INC. AND IS NOT TO BE REPLICATED
OR ALTERED WITHOUT AUTHORIZATION OF
ICE CUBE, INC.

DRAWN: JJH SCALE: NONE
DATE: 3-1-10
SHEET 1 OF 2

ICE CUBE INDUSTRIAL COOLING EQUIPMENT
141 WILSON AVENUE
GREENSBURG, PA 15601
724-837-8204 # 1-888-867-8234
FAX 724-837-2086

IQ25,35,4500V
480-400VAC

IQ300228 | 1