



IQ1000MM-R
 COOLING CAPACITY: 1000 BTUH (293W) @131°F (55°C)
 MAXIMUM AMPS: 3.1 (372W) @120V/60HZ
 MAXIMUM AMPS: 1.5 (345W) @230V/60HZ
 MAXIMUM AMPS: 8.0 (384W) @48VDC
 MAXIMUM AMPS: 10.6 (254W) @24VDC
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 15.06" (382MM) H X 6.08" (154MM) W X 6.30" (160MM) D
 WEIGHT 120 & 230V: 21 LBS (9.5KG)
 WEIGHT 24 & 48VDC: 13.8 LBS (6.3KG)

REV	REVISION	CHG	DATE	APP	DATE	CN #
D	ADDED DC VOLTAGE, UPDATED CUTOUT	RCC	3/6/2019			
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/30/2018			1351
B	ADDED WATTAGE INFO	RCC	1/5/2018			
A	REDRAWN IN SW	RCC	4/24/2017			


ITEM NUMBER	N/A	USED ON	IQ1000MM-R
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	RCC	DATE	4/24/2017
		SCALE	1:4

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH $\sqrt{63}$	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ1000MM-R SPEC DRAWING
 DRAWING NUMBER
IQ280226
 REV
D

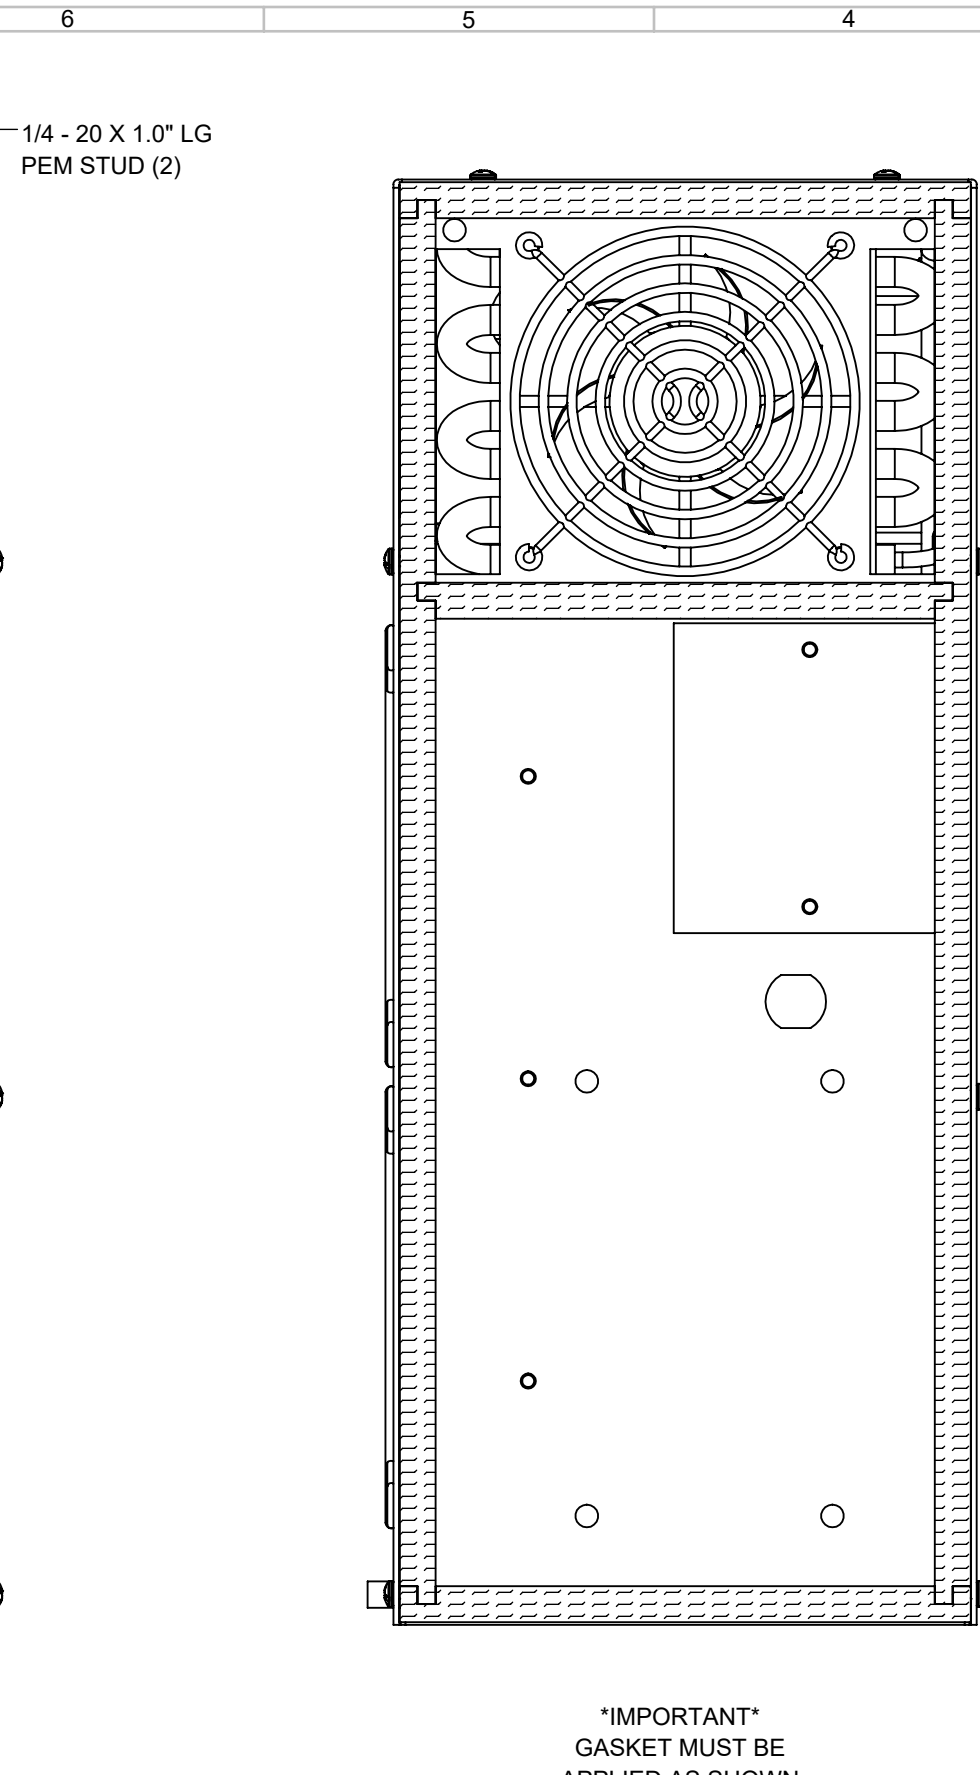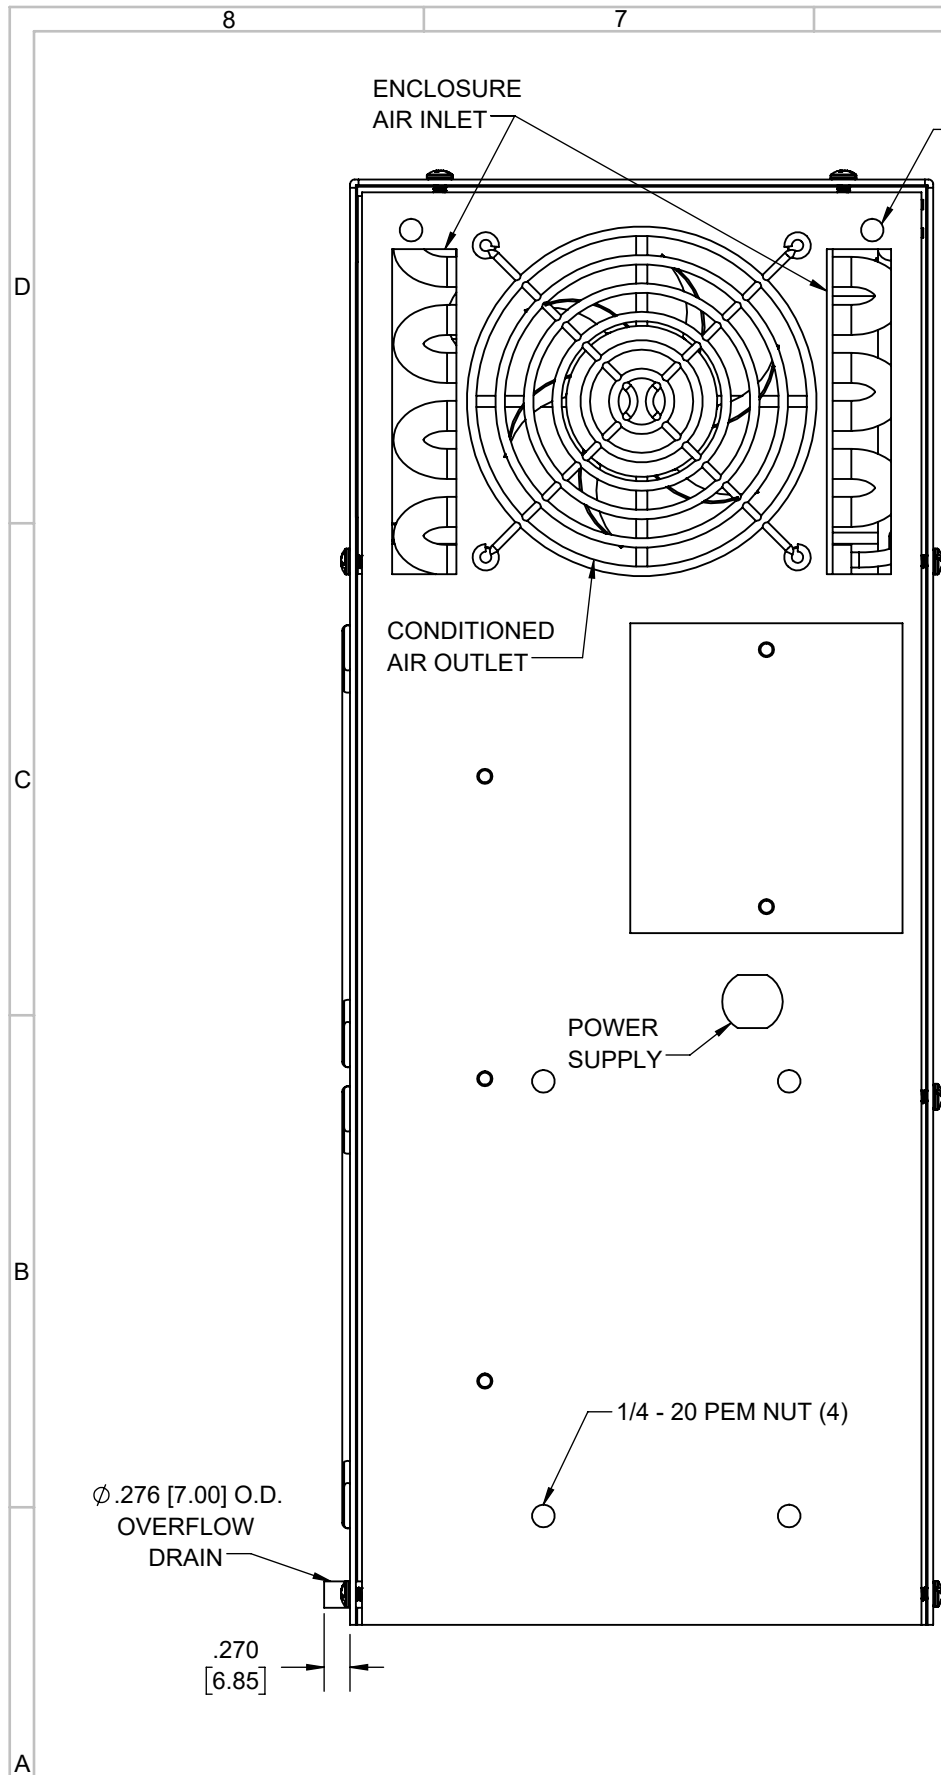

IMPORTANT
 GASKET MUST BE
 APPLIED AS SHOWN
 AND TO MAINTAIN
 NEMA INTEGRITY.

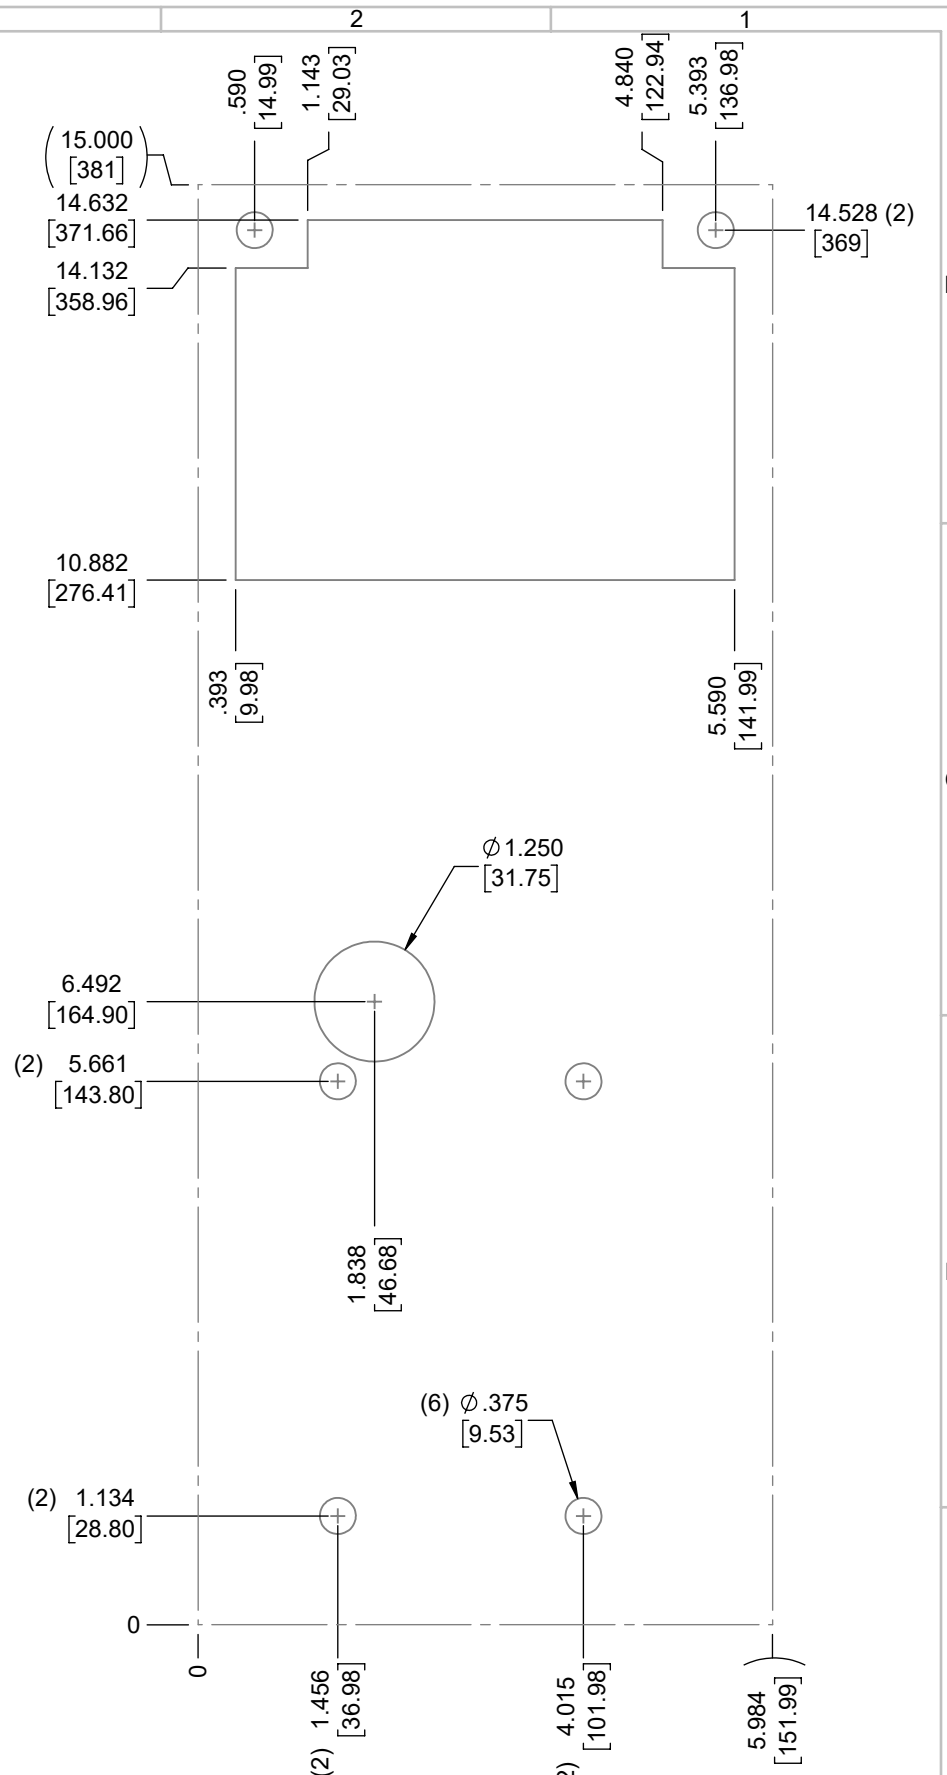

EVAP. OUTLET ≈ 125 CFM
 COND. OUTLET ≈ 210 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 61 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA
 CONDENSER INLET MIN. CLEARANCE 1.68"

ITEM NUMBER N/A	USED ON IQ1000MM-R	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	<p>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>
MATERIAL N/A		DESCRIPTION IQ1000MM-R SPEC DRAWING	
EST WT: lbs	DATE 4/24/2017	SCALE 1:2	DRAWING NUMBER IQ280226
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES			REV D