

IQ4000VS
 COOLING CAPACITY: 4000 BTUH (1173W) @131°F (55°C)
 MAXIMUM AMPS: 2.2 (1056W) @480V 60HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 34.12" (867MM) H X 12.27" (312MM) W X 8.34" (212MM) D
 WEIGHT: 76 LBS (34.5KG)

REV	CHG	DATE	APP	DATE	CN #
C		3/29/2018			1351
B		1/4/2018			
A		9/20/2016			

ITEM NUMBER	N/A	USED ON	IQ4000VS
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	RCC	DATE	9/20/2016
		SCALE	1:6

UNLESS OTHERWISE SPECIFIED TOLERANCES	
X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH 63	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ4000VS SPEC DRAWING, 480V
 DRAWING NUMBER
IQ290424
 REV
C



8 7 6 5 4 3 2 1

D


C

B

A

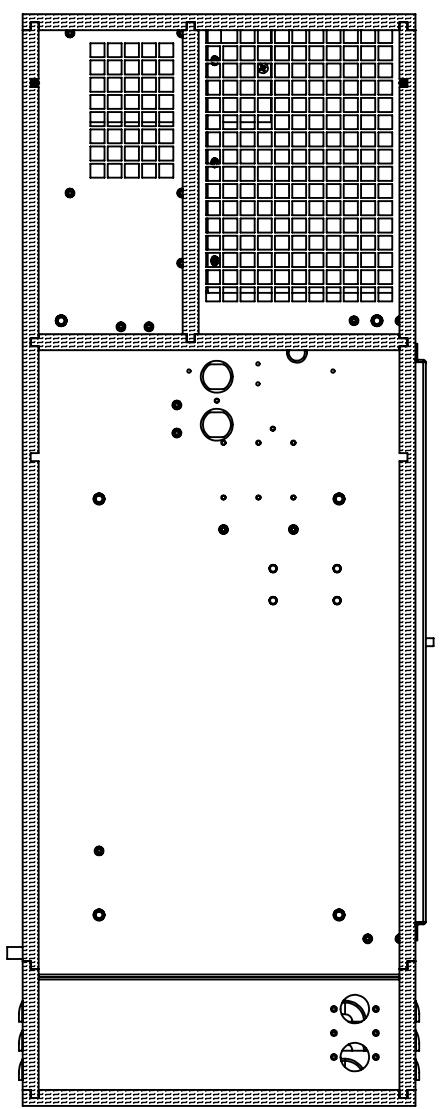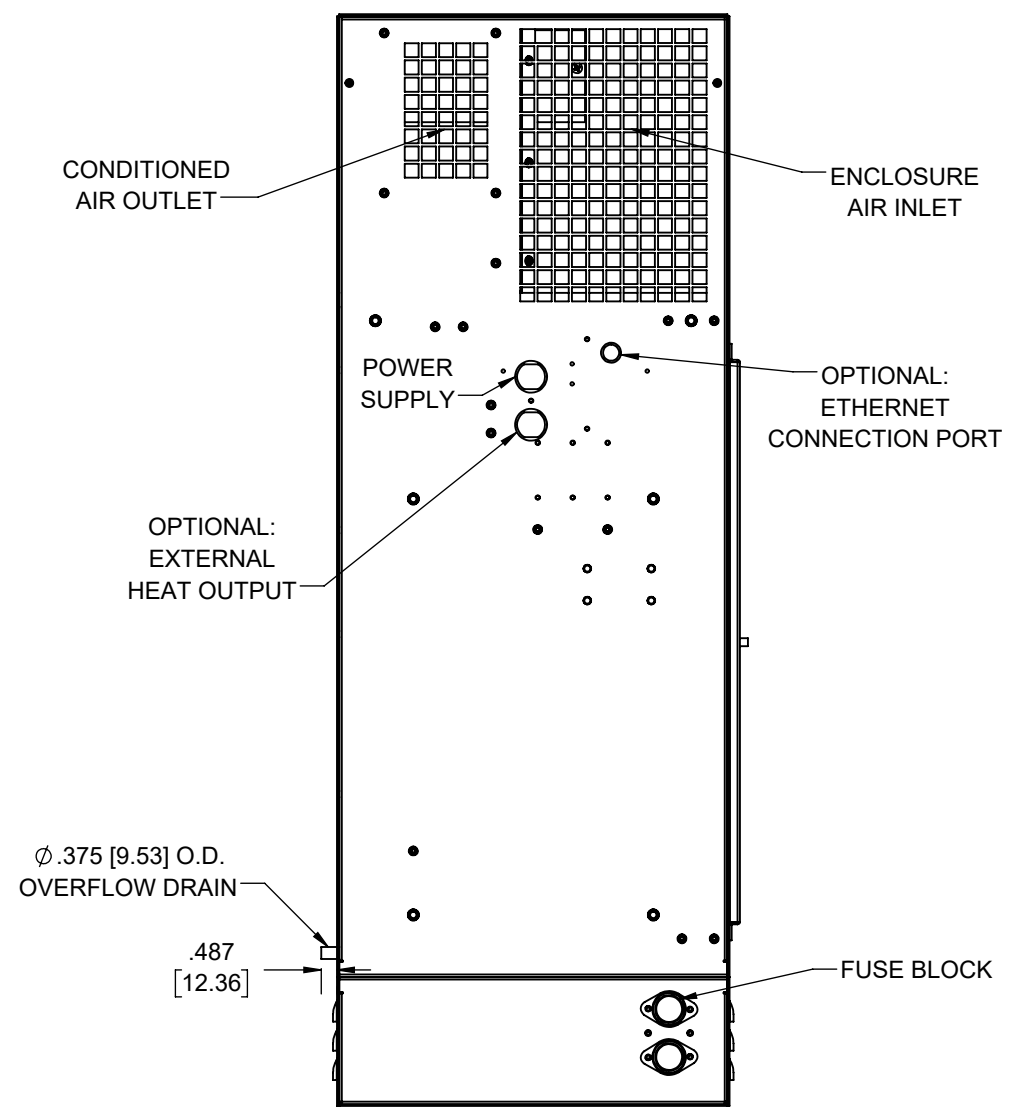

IMPORTANT
 GASKET MUST BE APPLIED AS SHOWN FOR PROPER OPERATION AND TO MAINTAIN NEMA INTEGRITY.

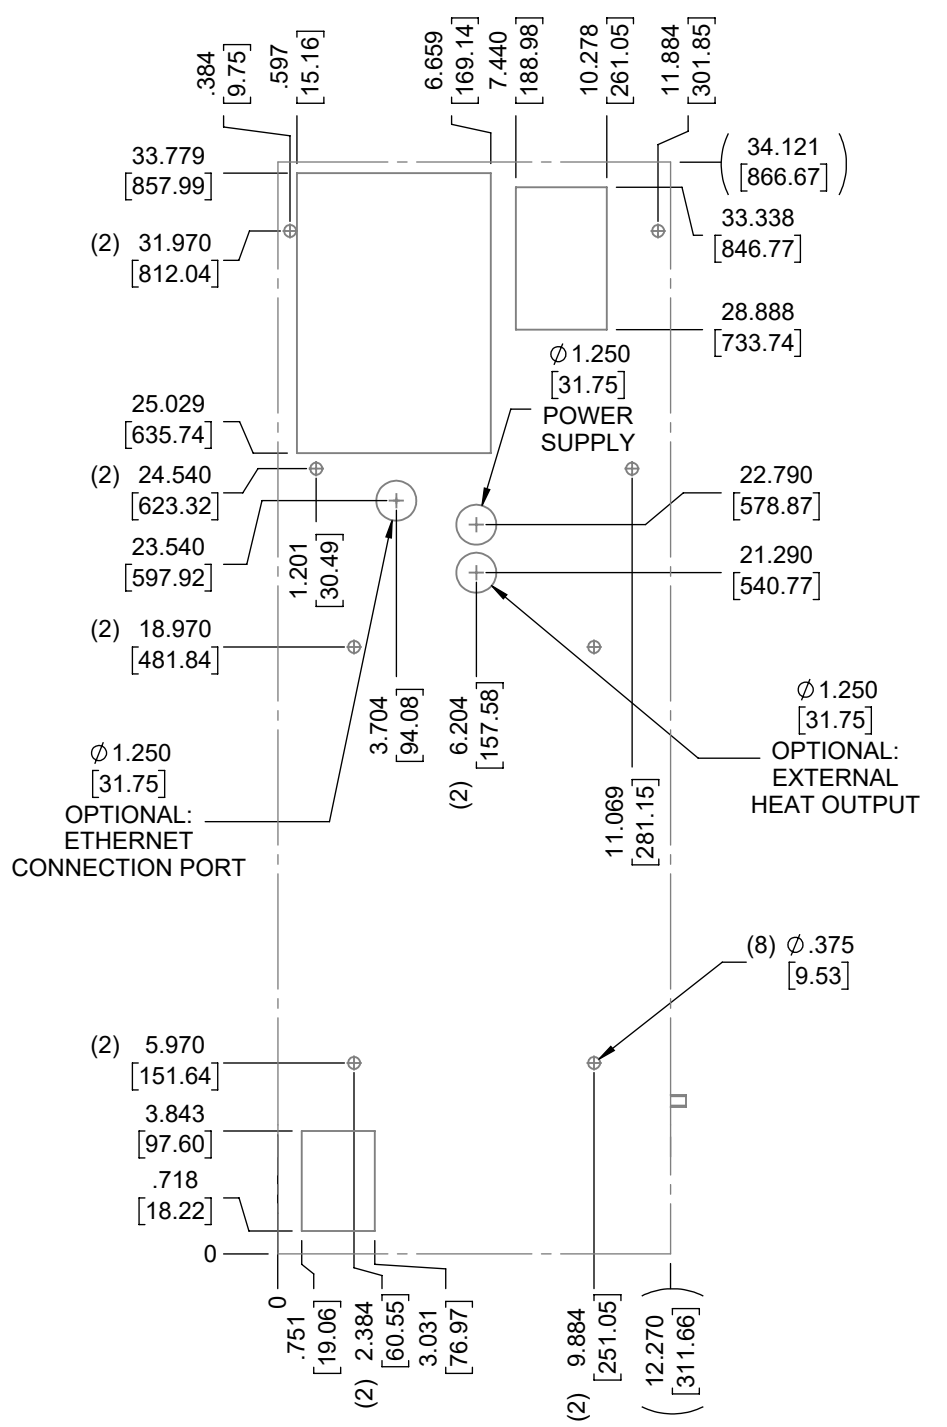

EVAP. OUTLET ≈ 158 CFM
 COND. OUTLET ≈ 236 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 61 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 62 dBA
 CONDENSER INLET MIN. CLEARANCE 2.80"

ITEM NUMBER N/A	USED ON IQ4000VS	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	<p>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p> <p>DESCRIPTION IQ4000VS SPEC DRAWING, 480V</p>
MATERIAL N/A		SURFACE FINISH 63	
EST. WT.: lbs		DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	DRAWING NUMBER IQ290424
DRAWN BY RCC	DATE 9/20/2016	SCALE 1:6	REV C