



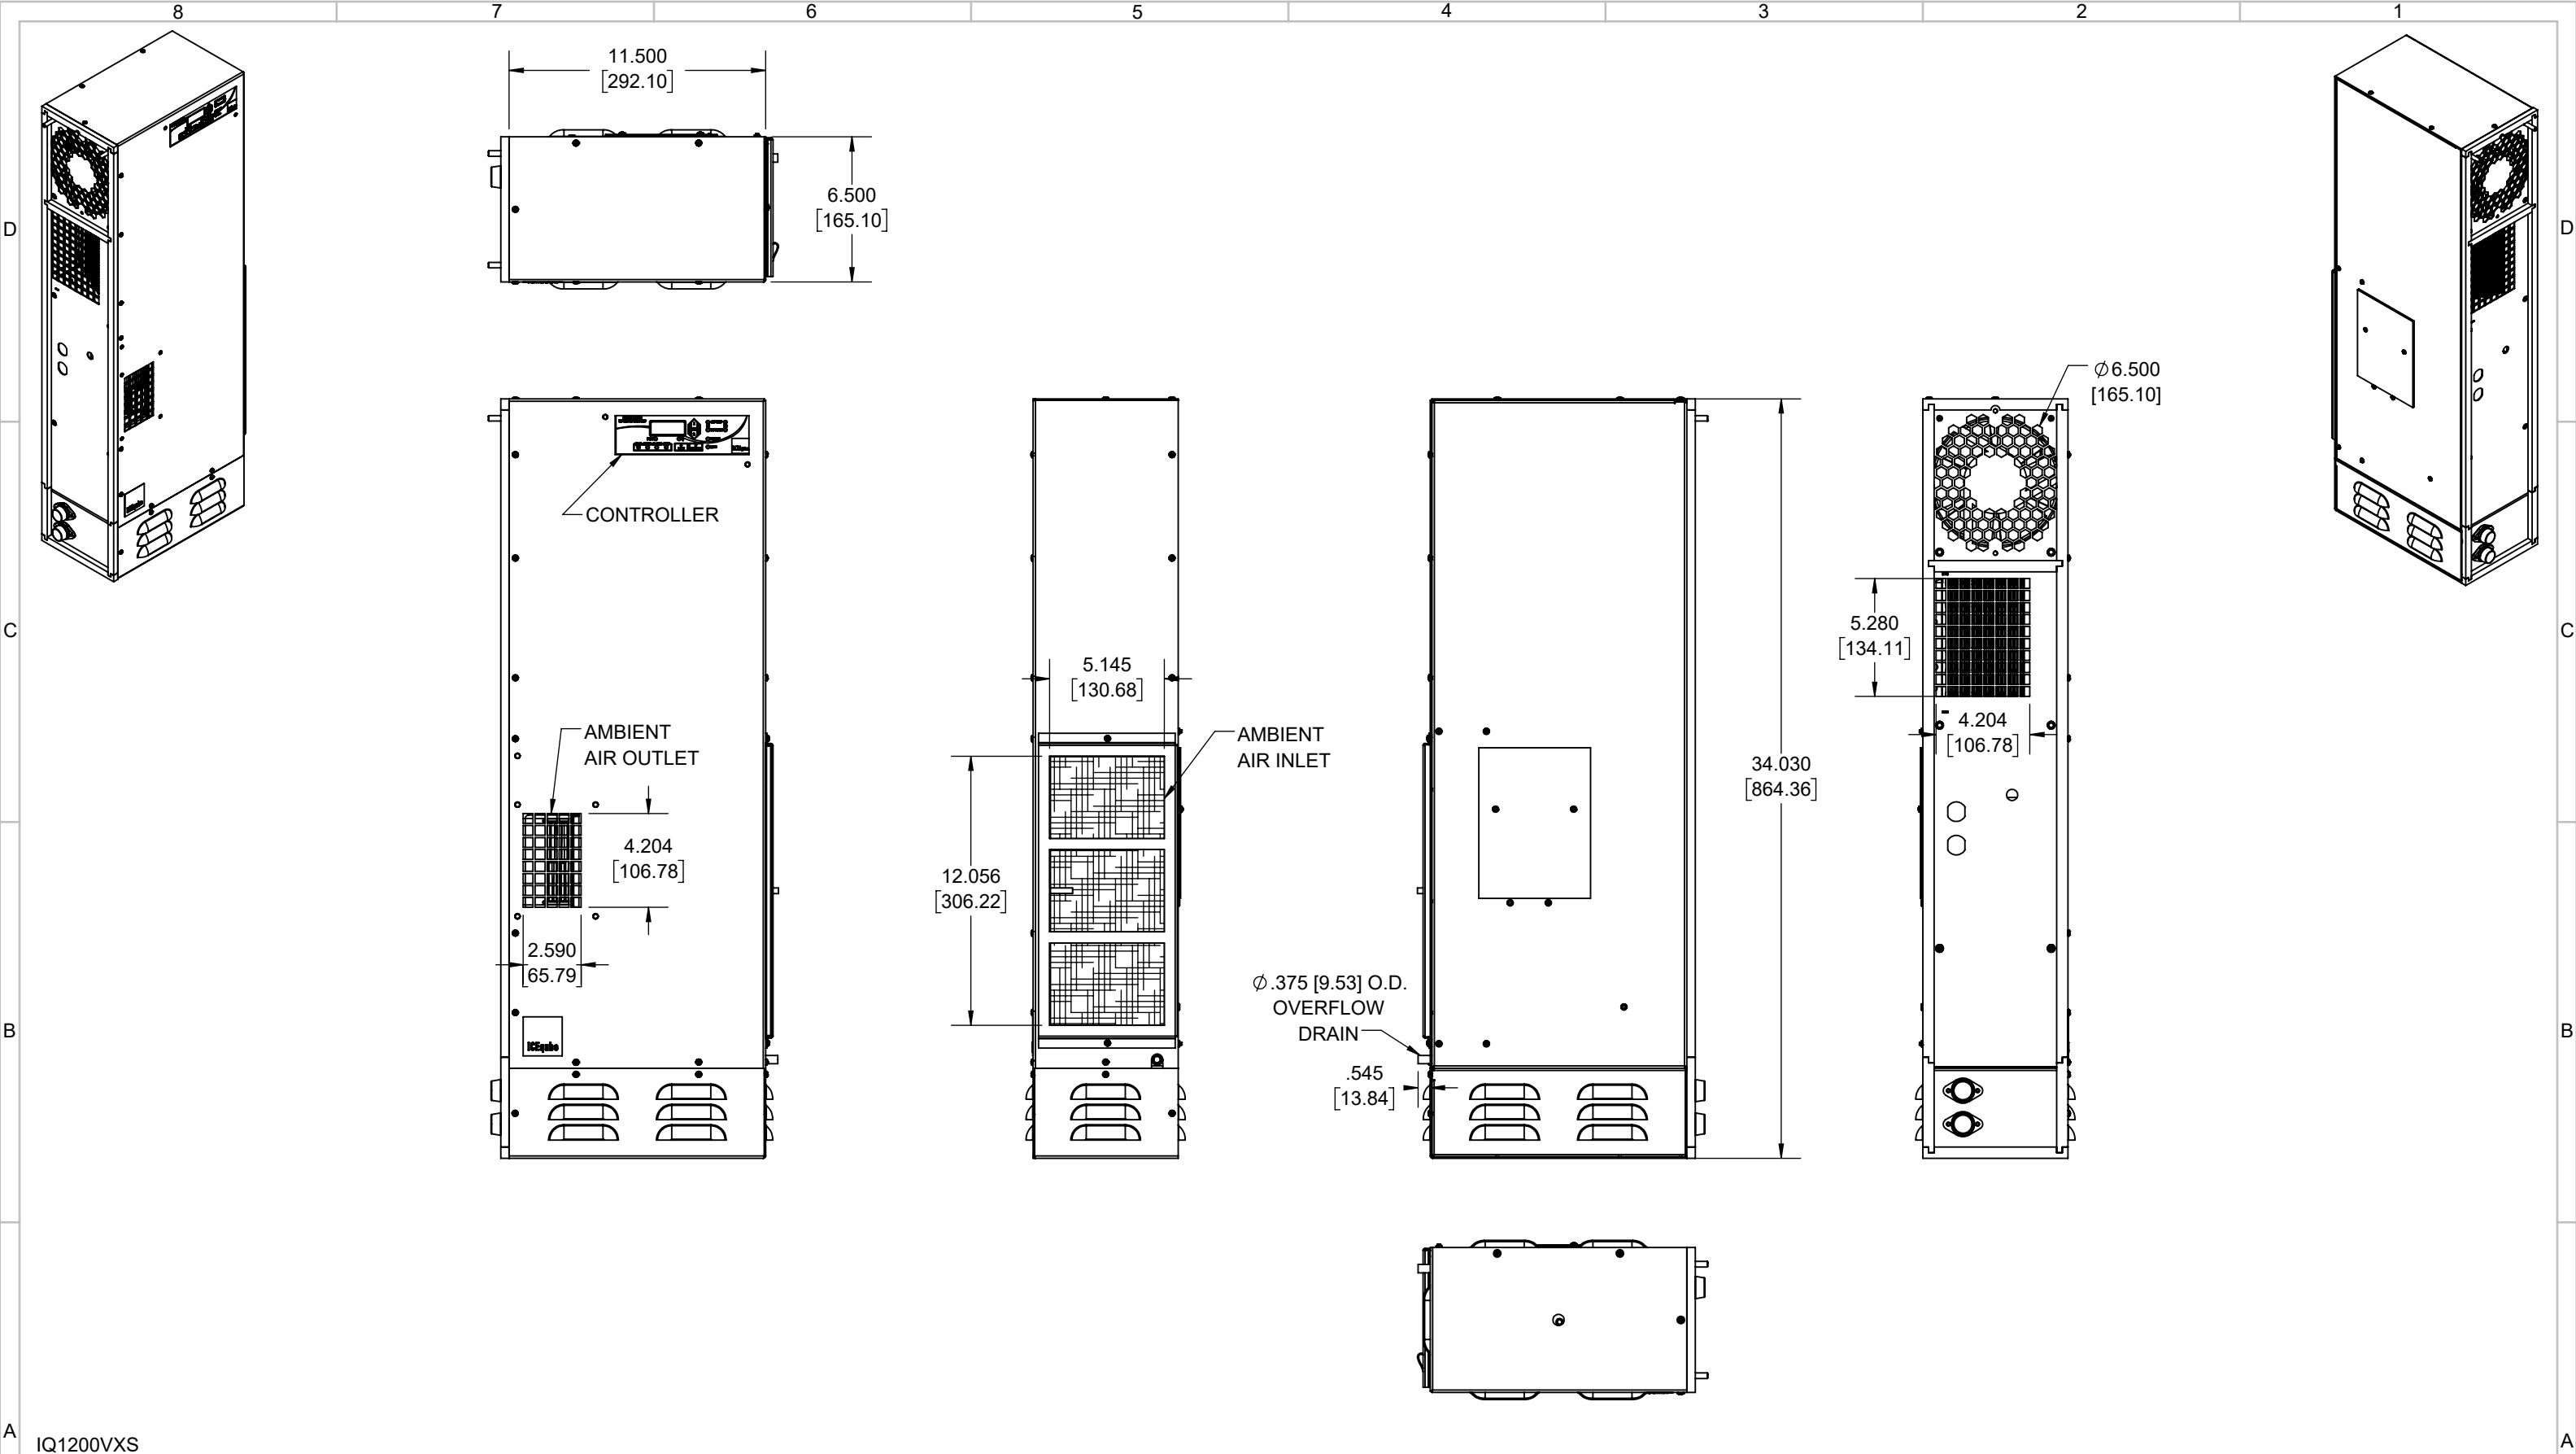

IQ1200VXS
COOLING CAPACITY: 1200 BTUH (352W) @131°F (55°C)
MAXIMUM AMPS: 0.9 (432W) @480V/60HZ
MAXIMUM OPERATING TEMP: 131°F (55°C)
MINIMUM OPERATING TEMP: -40°F (-40°C)
DIMENSIONS: 34.03" (864MM) H X 6.50" (165MM) W X 11.50" (292MM) D
WEIGHT: 59 LBS (26.8KG)

							ITEM NUMBER N/A		USED ON IQ1200VXS		UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/16 ANGULAR ±1/2° SURFACE FINISH 63 DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.			
							MATERIAL N/A						DESCRIPTION IQ1200VXS SPEC DRAWING, 480V			
D	REVISED CUTOUT					SRZ	4/15/2020	NAT	4/29/2020	ECN-1429						
C	ADDED CFM, dBA, AND CLEARANCE INFO					RCC	3/26/2018			1351						
B	ADDED WATTAGE INFO					RCC	12/29/2017									
A	REDRAWN IN SW					RCC	4/7/2017									
REV	REVISION					CHG	DATE	APP	DATE	CN #						
							EST WT: lbs		DRAWN BY RCC		DATE 4/7/2017		SCALE 1:7			

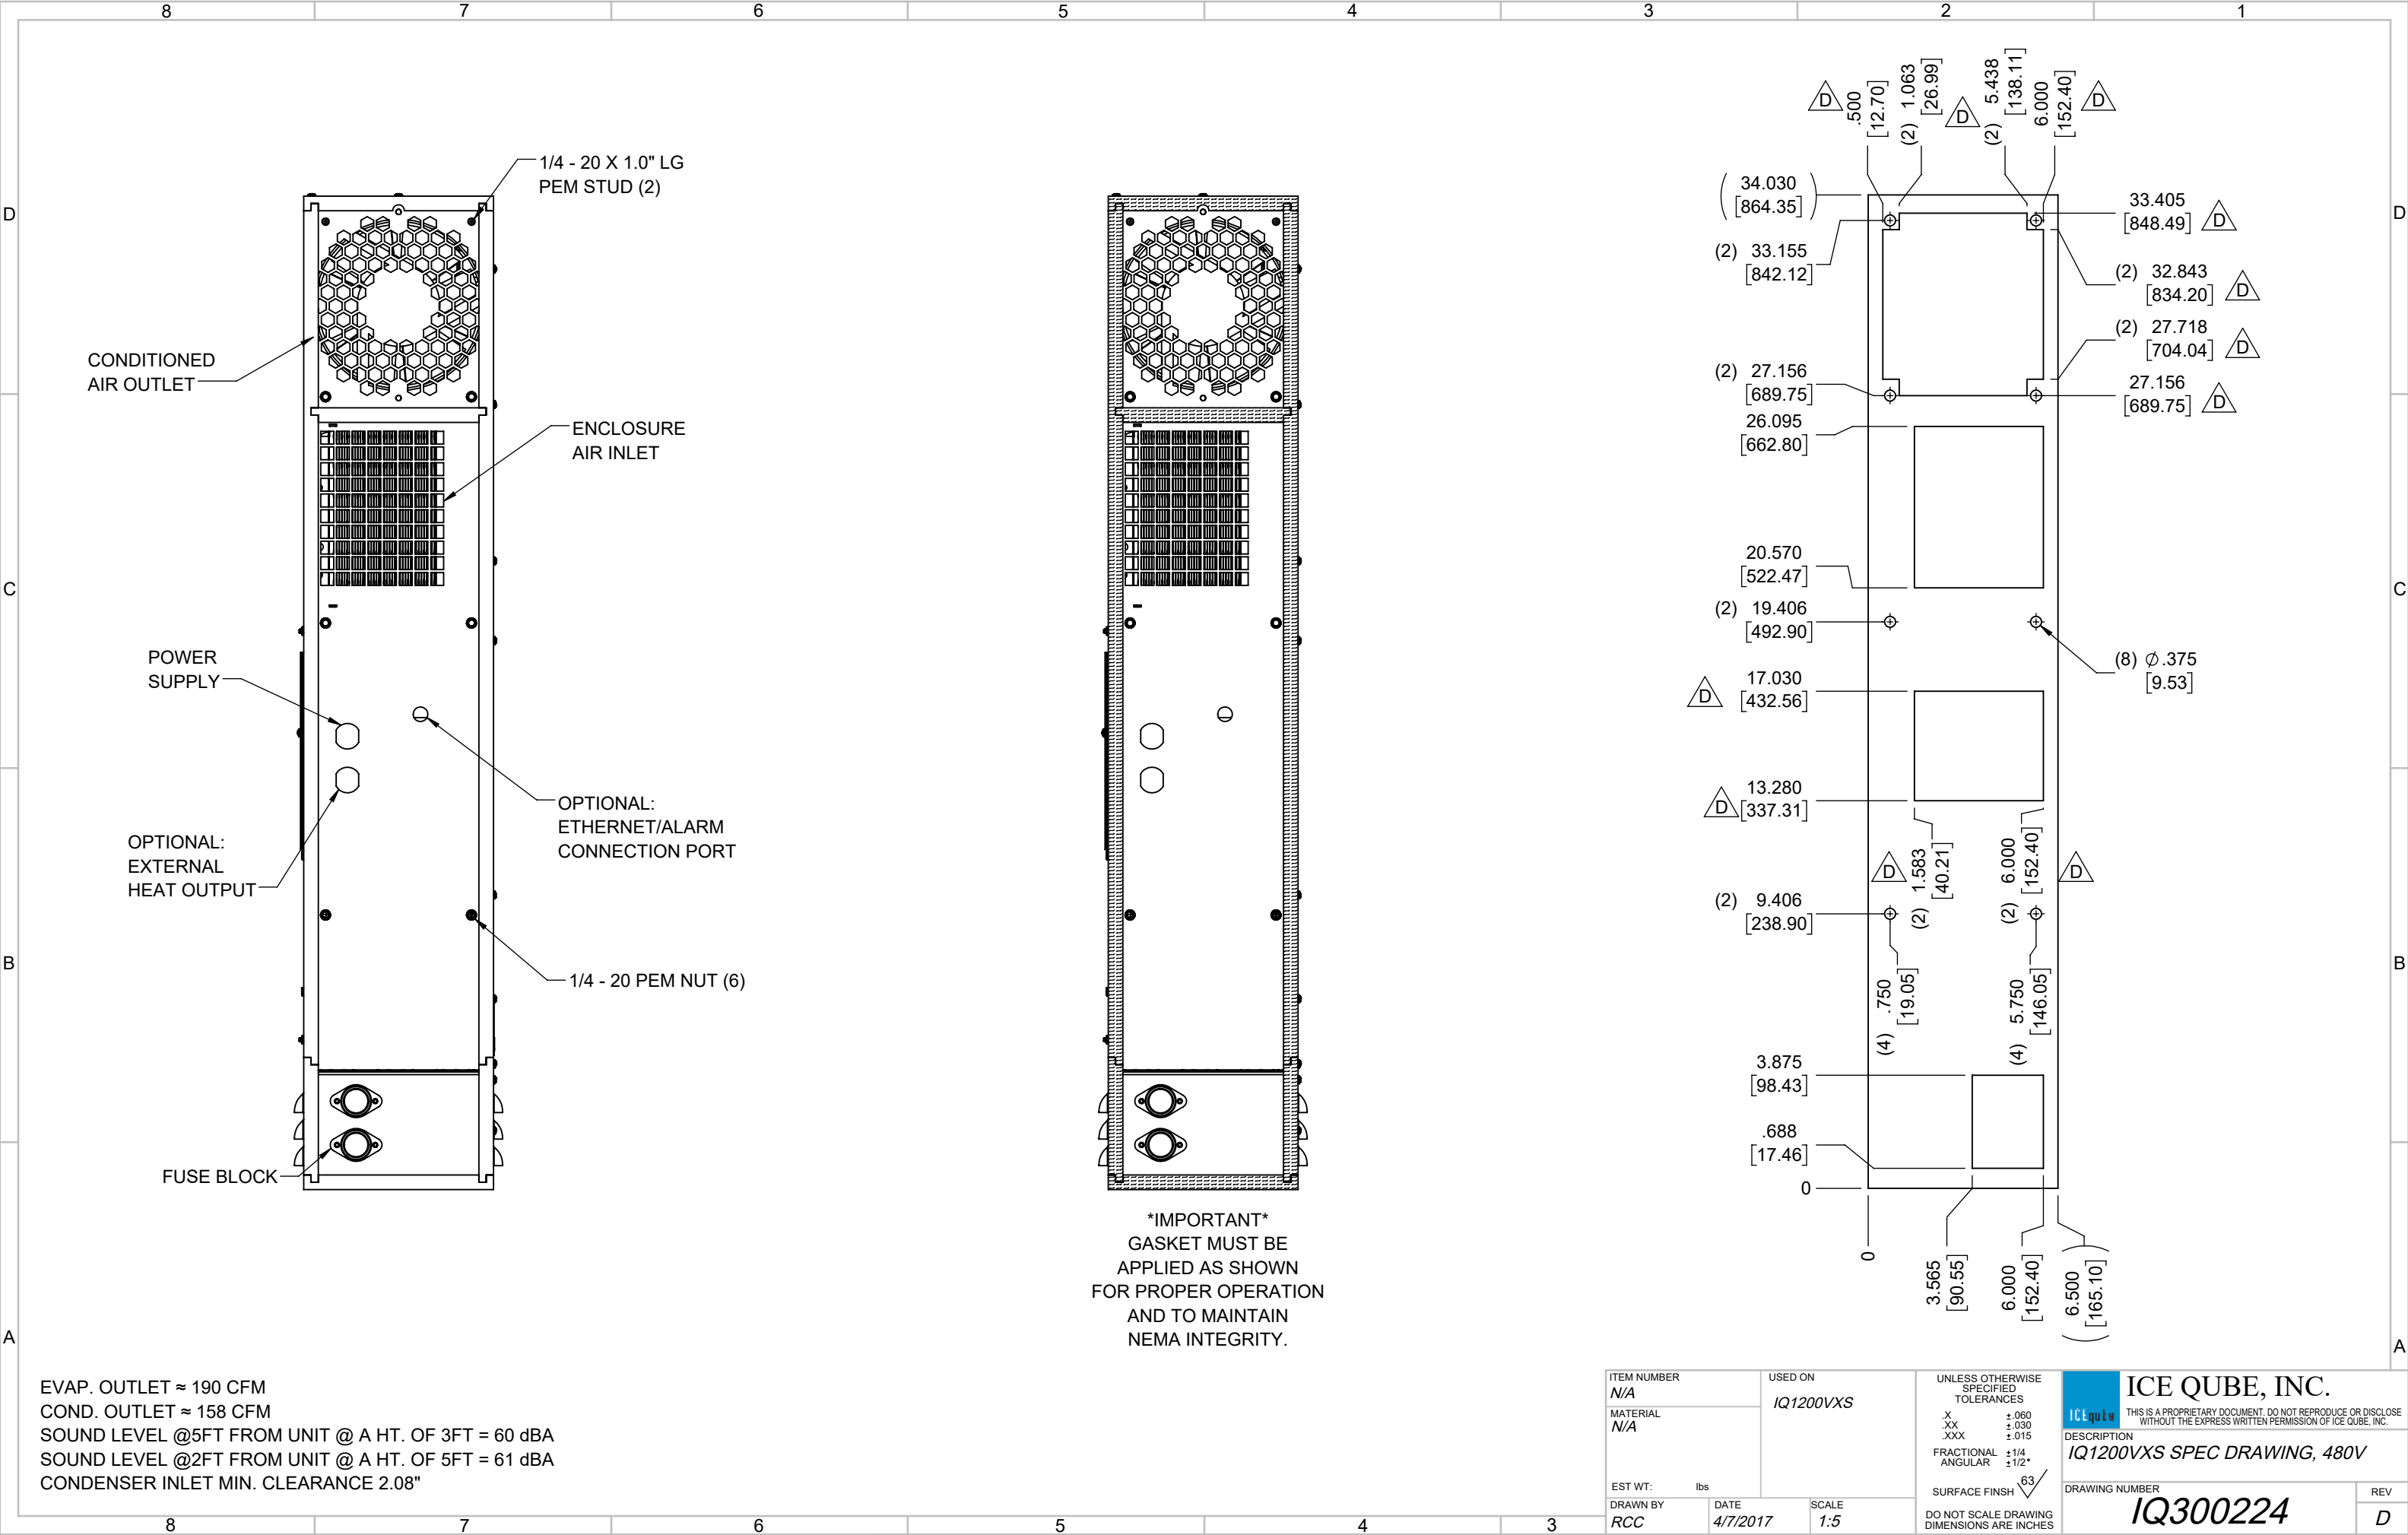

EVAP. OUTLET $\approx$ 190 CFM
COND. OUTLET $\approx$ 158 CFM
SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 60 dBA
SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA
CONDENSER INLET MIN. CLEARANCE 2.08"

ITEM NUMBER N/A		USED ON IQ1200VXS		UNLESS OTHERWISE SPECIFIED TOLERANCES X $\pm$.060 .XX $\pm$.030 .XXX $\pm$.015 FRACTIONAL $\pm$ 1/4 ANGULAR $\pm$ 1/2° SURFACE FINISH 63	ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC. DESCRIPTION IQ1200VXS SPEC DRAWING, 480V
MATERIAL N/A				DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	
EST WT: lbs					DRAWING NUMBER IQ300224
DRAWN BY RCC	DATE 4/7/2017	SCALE 1:5			REV D