

4

3







2

1

IQ1000B SPEC DRAWING

IQ1000B

COOLING CAPACITY: 1000BTUH (293W) @ 131°F (55°C)
 MAXIMUM AMPS: 3.25 (390W) @ 120V/60HZ
 MAXIMUM AMPS: 1.80 (414W) @ 230V/60HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 18.661" (474MM) H x 13.150" (334MM) W x 4.350" (110.5MM) D
 WEIGHT: 24.27LBS (11KG)
 EVAP. OUTLET ≈ 90 CFM
 COND. OUTLET ≈ 250 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 76 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 77 dBA
 CONDENSER INLET MIN. CLEARANCE 1.65"

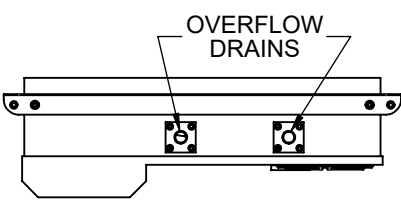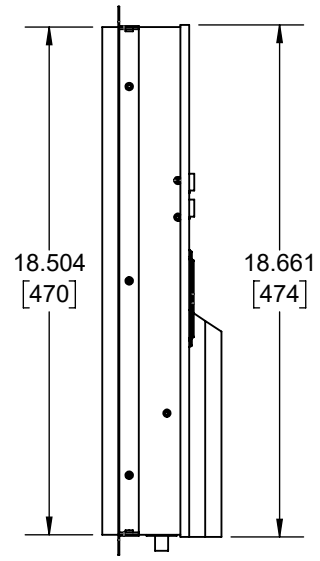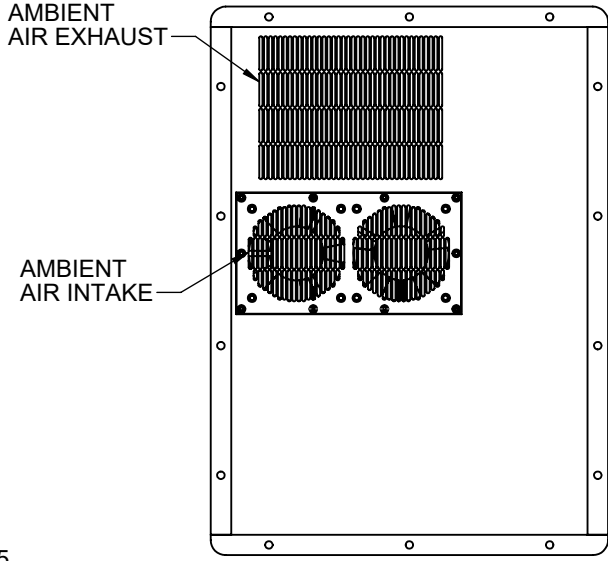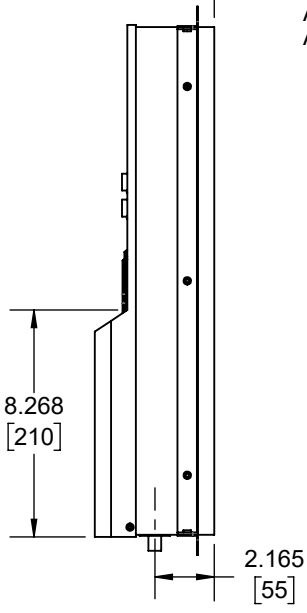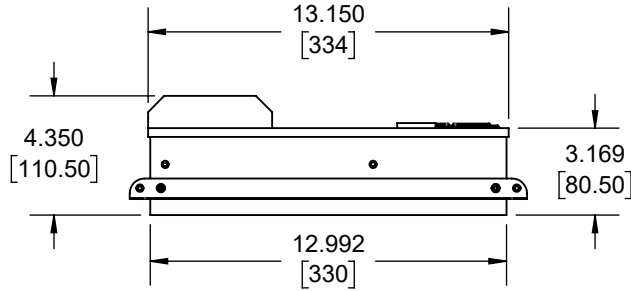

REV	ADDED CFM, dBA, AND CLEARANCE INFO	CHG	DATE	APP	DATE	CN#
E		RCC	4/26/2018			1351
REV	REVISION	CHG	DATE	APP	DATE	CN#

PART NUMBER	N/A
MATERIAL	N/A
EST WT:	lbs
DRAWN BY	ART

USED ON	IQ1000B
DATE	3/18/2015
SCALE	1:7

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/4
ANGULAR	±1/2°
SURFACE FINISH $\sqrt{63}$	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.

THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.


DESCRIPTION
SPEC DRAWING, IQ1000B

DRAWING NUMBER
IQ350396


REV	E
-----	---

E
D
C
B
A


E
D
C
B
A

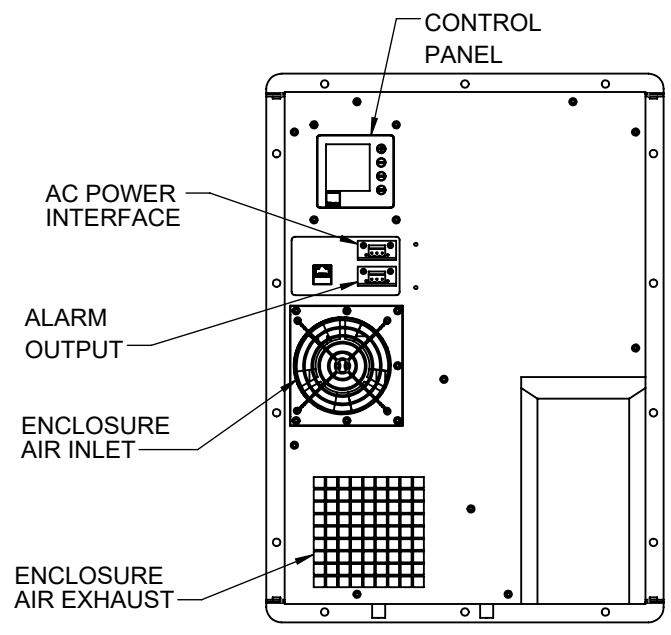

CUTOUT TEMPLATE

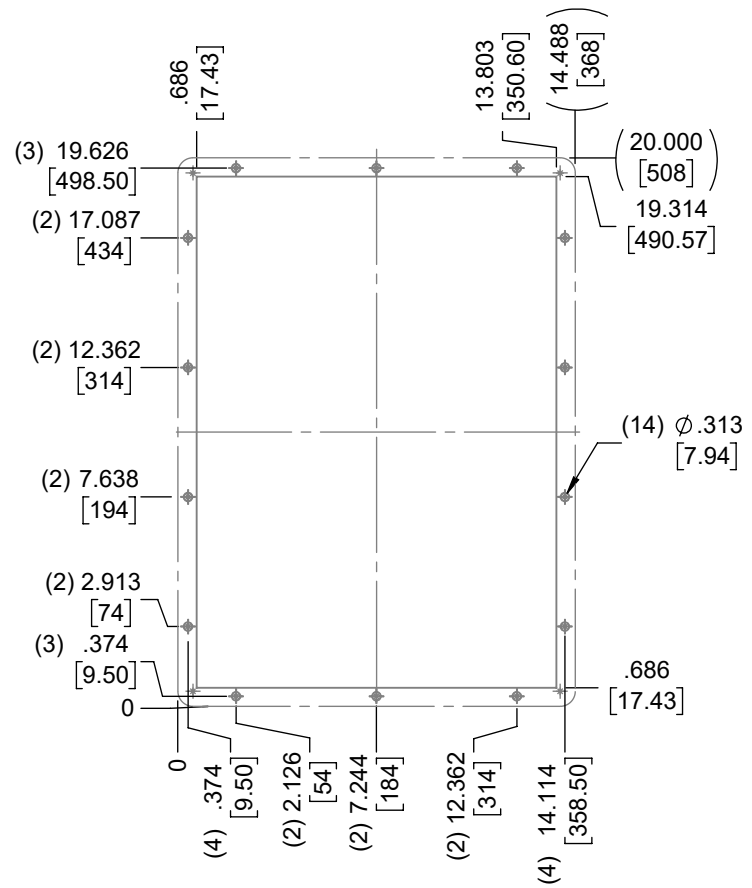

GASKET VIEW

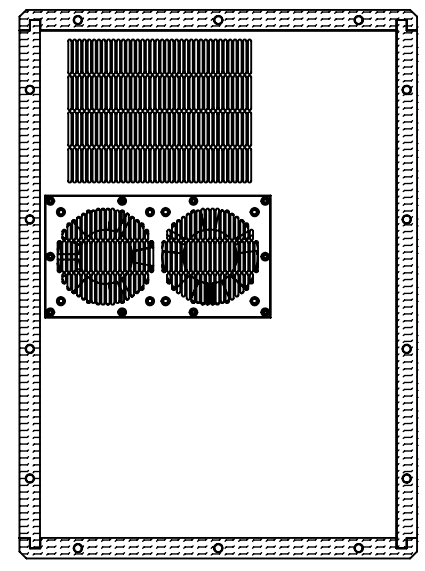

IMPORTANT
GASKET MUST BE APPLIED AS SHOWN
FOR PROPER OPERATION AND TO
MAINTAIN NEMA INTEGRITY

PART NUMBER <i>N/A</i>		USED ON <i>IQ1000B</i>	
MATERIAL <i>N/A</i>			
EST WT: DRAWN BY <i>ART</i>	DATE <i>3/18/2015</i>	SCALE <i>1:7</i>	

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	\pm .060
.XX	\pm .030
.XXX	\pm .015
FRACTIONAL	\pm 1/4
ANGULAR	\pm 1/2°
SURFACE FINISH $\sqrt{63}$	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.

THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.

DESCRIPTION
SPEC DRAWING, IQ1000B

DRAWING NUMBER
IQ350396

REV
E