


IQ2700B SPEC DRAWING

IQ2700B
 COOLING CAPACITY: 2700BTUH (792W) @ 131°F (55°C)
 MAXIMUM AMPS: 6.3 (756W) @120V/60HZ
 MAXIMUM AMPS: 3.9 (897W) @230V/60HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 28.520" (725MM) H x 16.709" (425MM) W x 4.630" (118MM) D
 WEIGHT: 45LBS (20.4KG)
 EVAP. OUTLET ≈ 220 CFM
 COND. OUTLET ≈ 325 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 64 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 66 dBA
 CONDENSER INLET MIN. CLEARANCE 2.25"

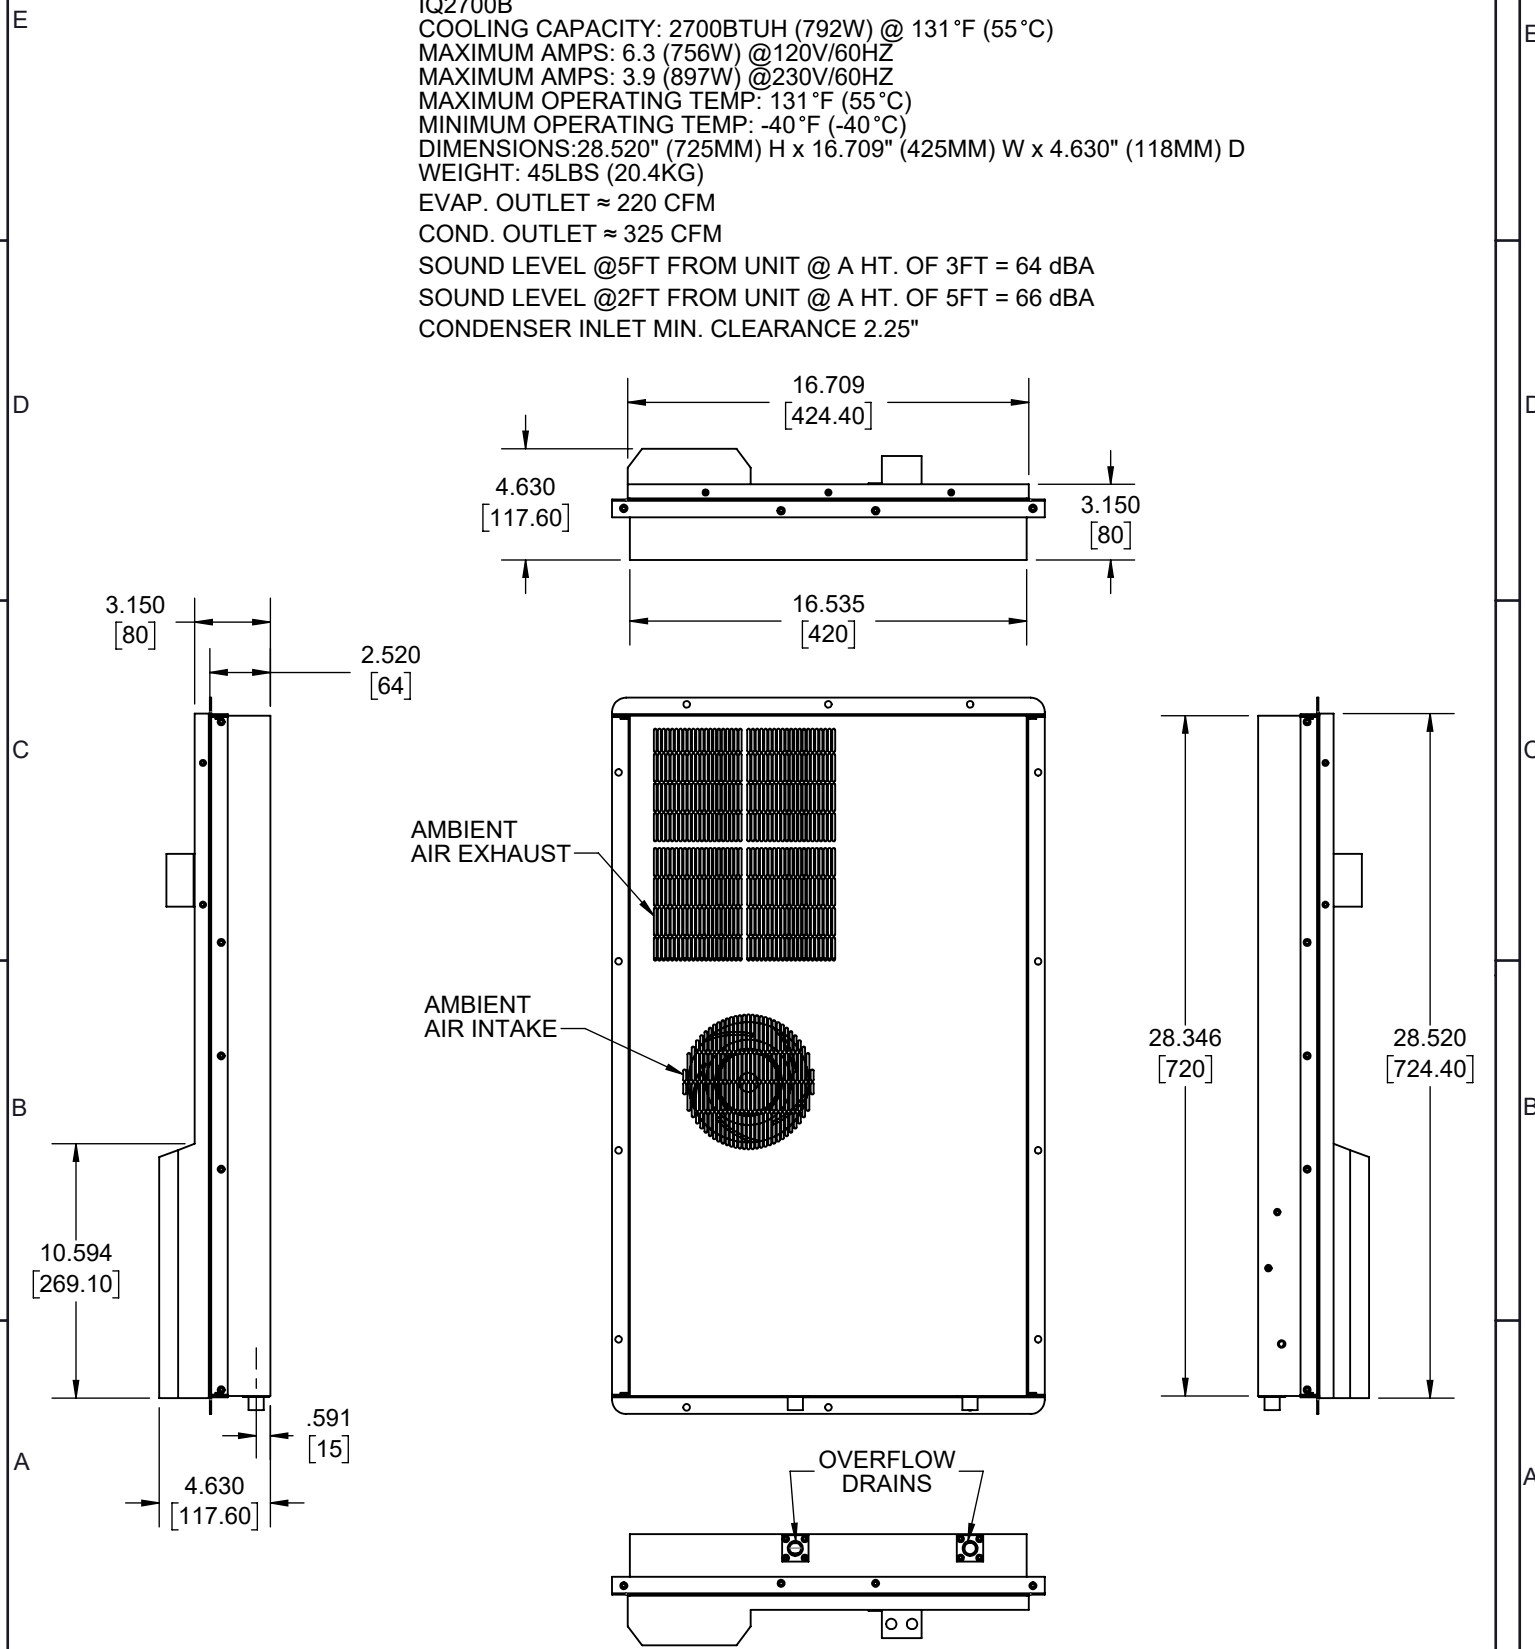

PART NUMBER <i>N/A</i>	USED ON <i>IQ2700B</i>
MATERIAL <i>N/A</i>	
EST WT: lbs	
DRAWN BY <i>ART</i>	DATE <i>3/18/2015</i>
	SCALE <i>1:8</i>

UNLESS OTHERWISE SPECIFIED TOLERANCES
 .X ±.060
 .XX ±.030
 .XXX ±.015
 FRACTIONAL ±1/4
 ANGULAR ±1/2°
 SURFACE FINISH $\sqrt{63}$
 DO NOT SCALE DRAWING DIMENSIONS ARE INCHES

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
SPEC DRAWING, IQ2700B
 DRAWING NUMBER
IQ350398
 REV
E

E	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	4/26/2018			1351
REV	REVISION	CHG	DATE	APP	DATE	CN#

E

D

C

B

A



E

D


C

B

A

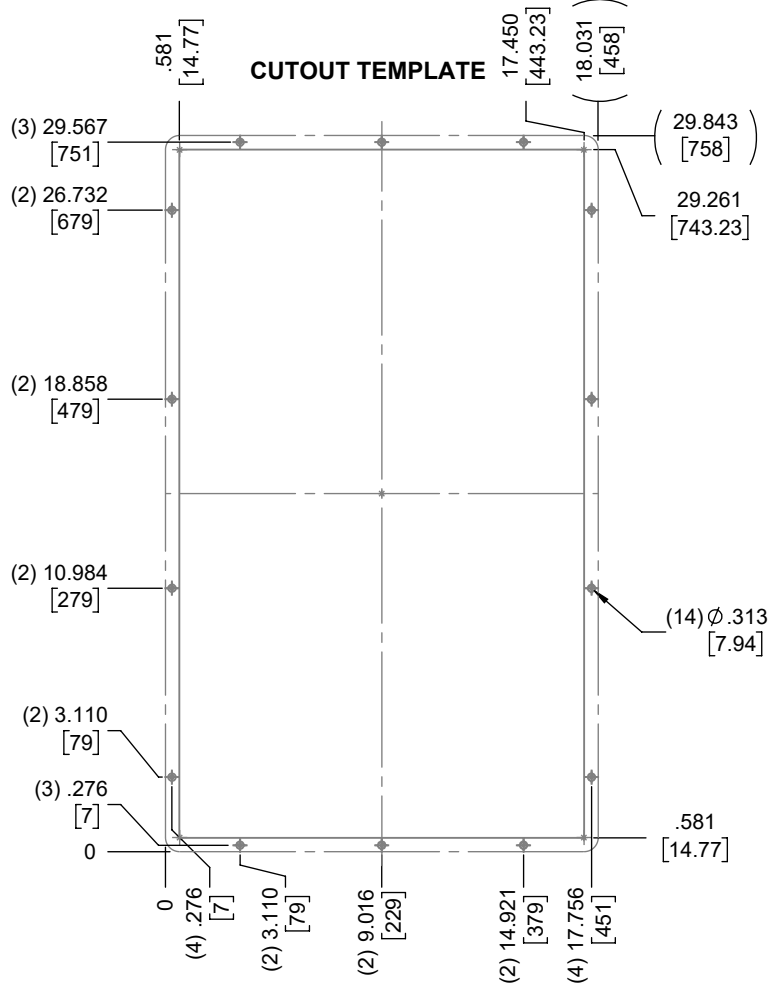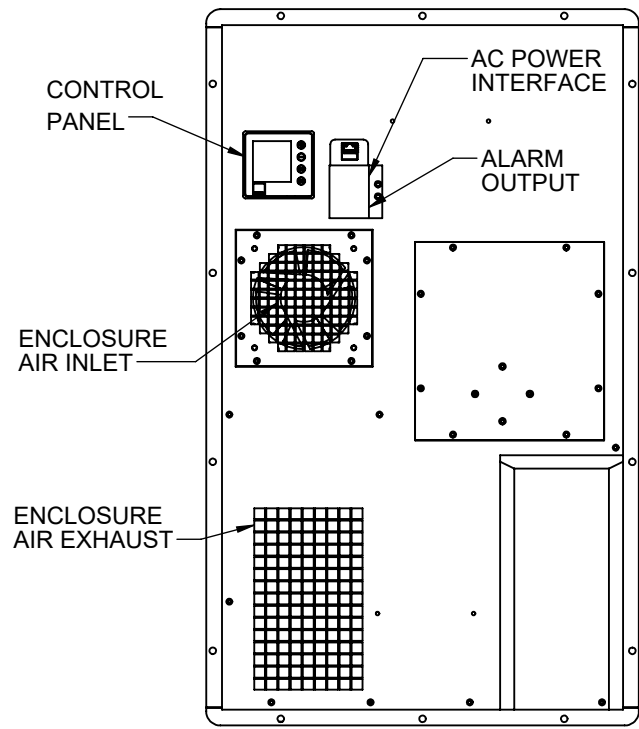

GASKET VIEW

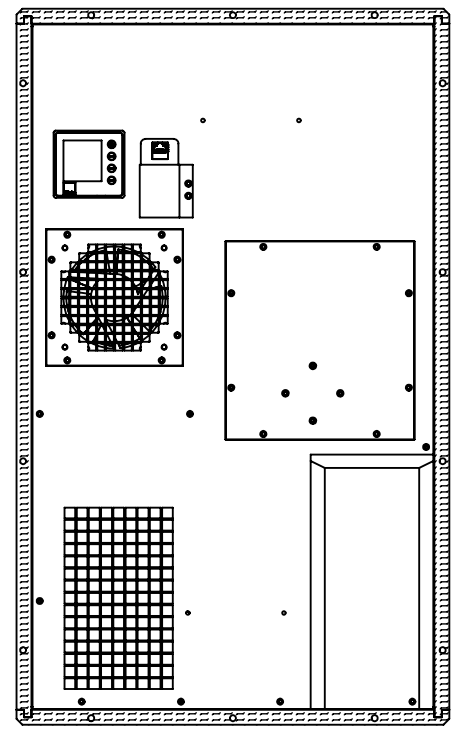

IMPORTANT
GASKET MUST BE APPLIED AS SHOWN
FOR PROPER OPERATION AND TO
MAINTAIN NEMA INTEGRITY

PART NUMBER <i>N/A</i>		USED ON <i>IQ2700B</i>	
MATERIAL <i>N/A</i>			
EST WT: DRAWN BY <i>ART</i>	lbs	DATE <i>3/18/2015</i>	SCALE <i>1:8</i>

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/4
ANGULAR	±1/2°
SURFACE FINISH \checkmark 63	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.

THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.

DESCRIPTION
SPEC DRAWING, IQ2700B

DRAWING NUMBER
IQ350398

REV
E