

IQ4000VXS
 COOLING CAPACITY: 4000 BTUH (1173W) @125°F (51.7°C)
 MAXIMUM AMPS: 2.3 (1104W) @480V/60HZ
 MAXIMUM OPERATING TEMP: 125°F (51.7°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 40.03" (1017MM) H X 11.50" (295MM) W X 15.00" (381MM) D
 WEIGHT: 136 LBS (61.8KG)



REV	REVISION	CHG	DATE	APP	DATE	CN #
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/22/2018			1351
B	ADDED WATTAGE INFO	RCC	12/15/2017			
A	REDRAWN IN SW	RCC	4/3/2017			

ITEM NUMBER	N/A
MATERIAL	N/A
EST WT:	lbs
DRAWN BY	RCC


USED ON	IQ4000VXS
DATE	4/3/2017
SCALE	1:8

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH	63
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ4000VXS SPEC DRAWING, 480V
 DRAWING NUMBER
IQ350572
 REV
C

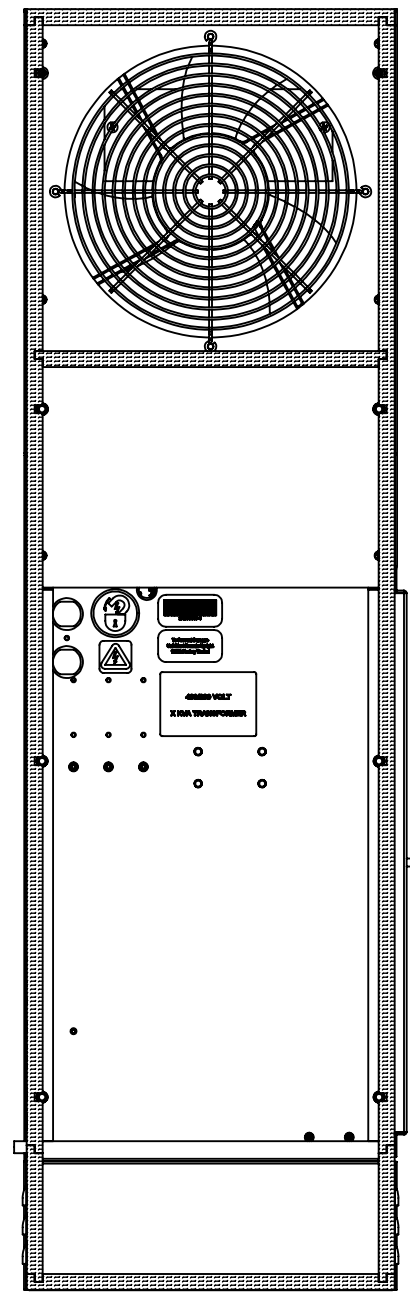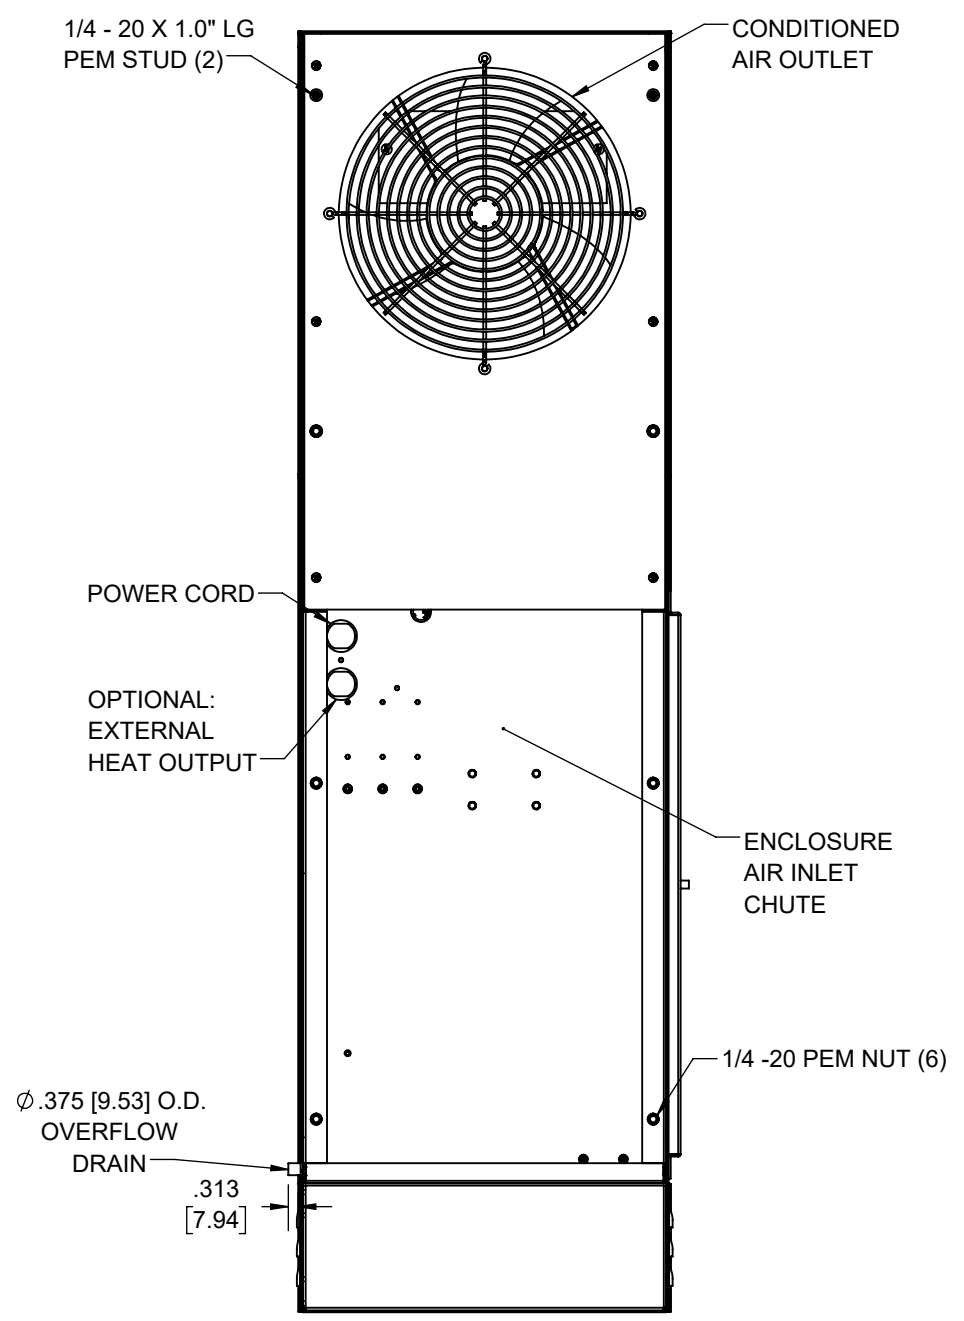

IMPORTANT
GASKET MUST BE APPLIED AS SHOWN FOR PROPER OPERATION AND TO MAINTAIN NEMA INTEGRITY.

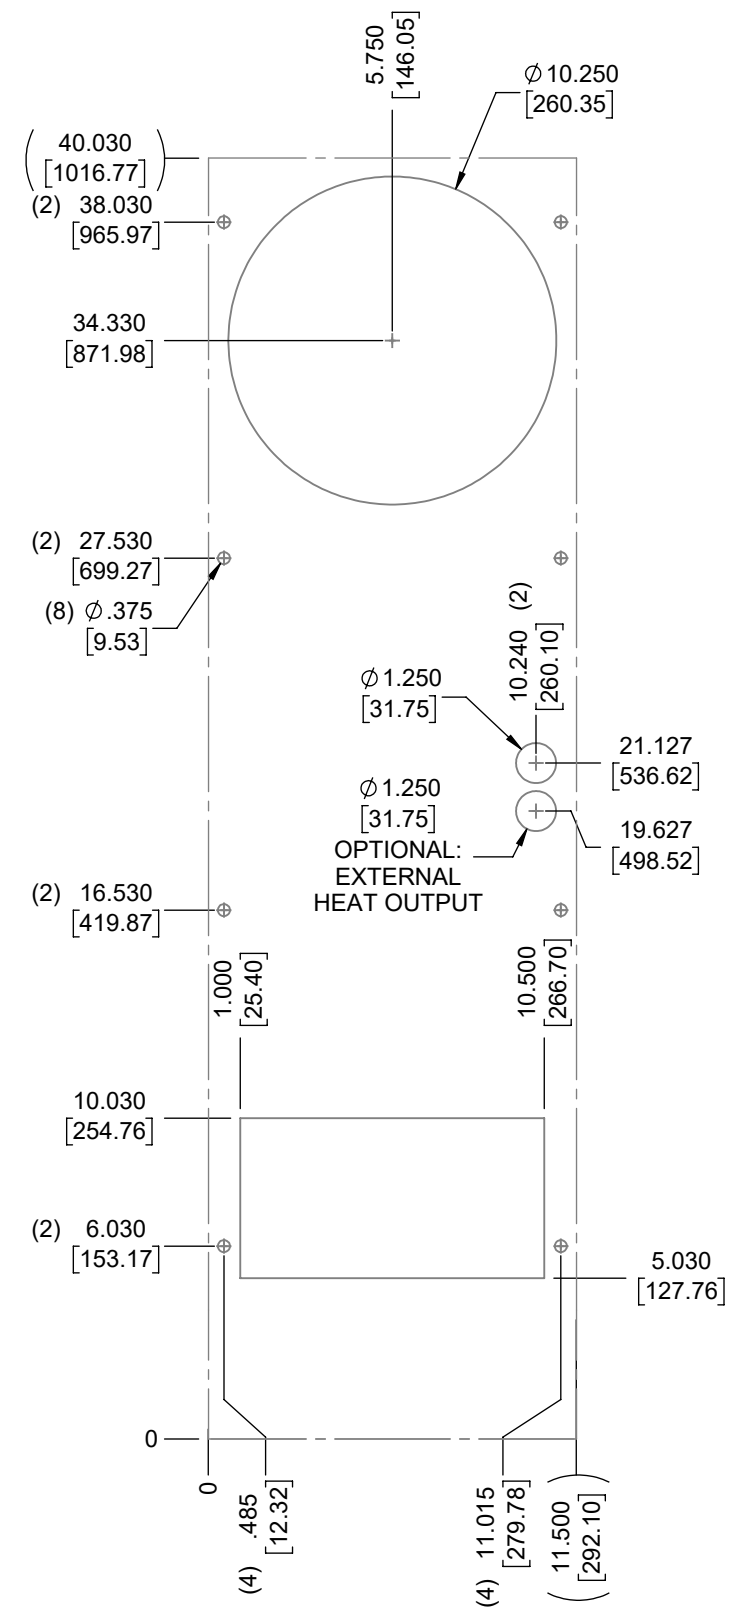

EVAP. OUTLET ≈ 900 CFM
COND. OUTLET ≈ 410 CFM
SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 64 dBA
SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 65 dBA
CONDENSER INLET MIN. CLEARANCE 3.62"

ITEM NUMBER N/A	USED ON IQ4000VXS	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	<p>ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>
MATERIAL N/A		<p>EST WT: lbs</p> <p>DRAWN BY: RCC</p> <p>DATE: 4/3/2017</p> <p>SCALE: 1:6</p> <p>DO NOT SCALE DRAWING DIMENSIONS ARE INCHES</p>	
DESCRIPTION IQ4000VXS SPEC DRAWING, 480V			DRAWING NUMBER IQ350572
REV C			