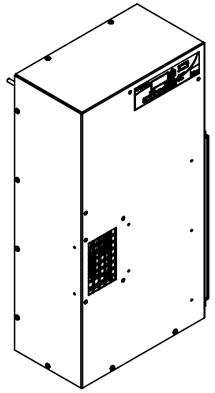

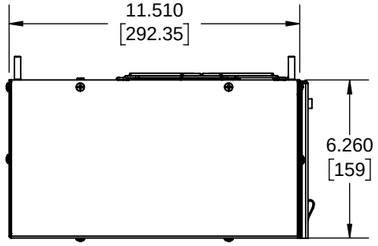


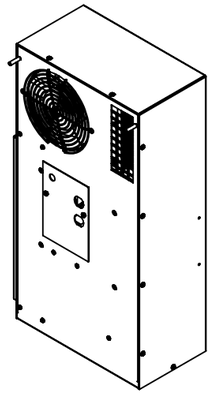

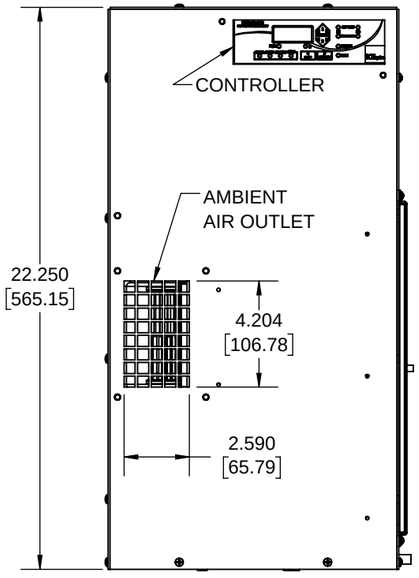


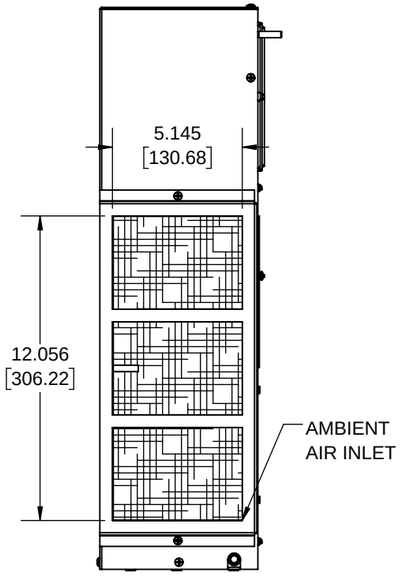


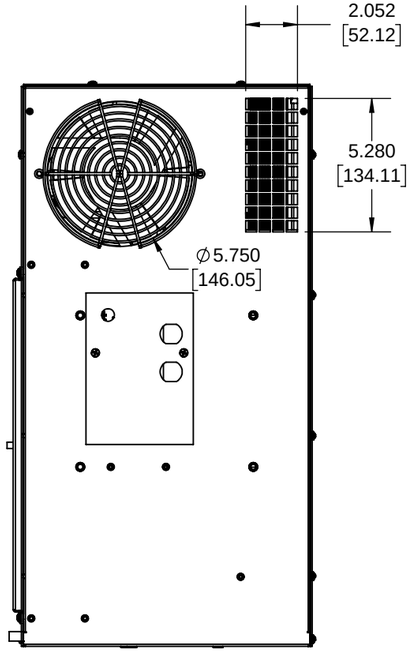


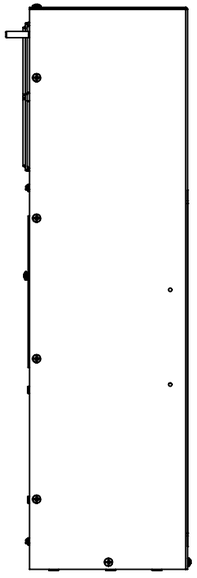



IQ1500VS
COOLING CAPACITY: 1500 BTUH (440W) @131°F (55°C)
MAXIMUM AMPS: 4.0 (480W) @120V/60HZ
MAXIMUM AMPS: 1.9 (437W) @230V/60HZ
MAXIMUM OPERATING TEMP: 131°F (55°C)
MINIMUM OPERATING TEMP: -40°F (-40°C)
DIMENSIONS: 22.25" (565MM) H X 11.51" (292MM) W X 6.26" (159MM) D
WEIGHT: 47 LBS (21.4KG)

| REV | REVISION | CHG | DATE | APP | DATE | CN # |
|---|---|---|---|---|---|---|
| D | UPDATED CUTOUT | SRZ | 4/15/2020 | NAT | 4/28/2020 | ECN-1429 |
| C | ADDED CFM, dBA, AND CLEARANCE INFO | RCC | 3/26/2018 | | | 1351 |
| B | ADDED WATTAGE INFO | RCC | 12/29/2017 | | | |
| A | REDRAWN IN SW | RCC | 4/6/2017 | | | |

ITEM NUMBER: *N/A*
MATERIAL: *N/A*
EST WT: lbs
USED ON: *IQ1500VS*
DRAWN BY: *RCC*
DATE: *04/06/2017*
SCALE: *1:6*

UNLESS OTHERWISE SPECIFIED TOLERANCES
.X ±.060
.XX ±.030
.XXX ±.015
FRACTIONAL ±1/16
ANGULAR ±1/2°
SURFACE FINSH 63
DO NOT SCALE DRAWING
DIMENSIONS ARE INCHES

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.

DESCRIPTION: *IQ1500VS SPEC DRAWING*
DRAWING NUMBER: *IQ351399*
REV: *D*

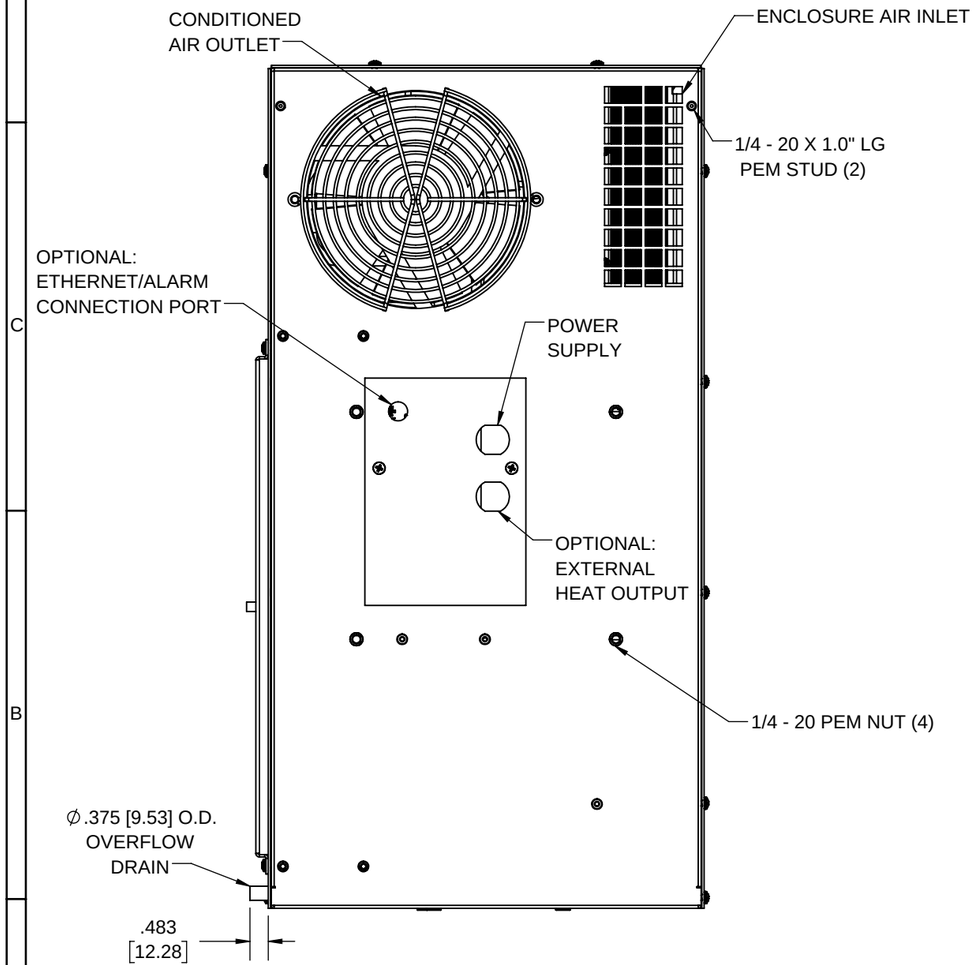


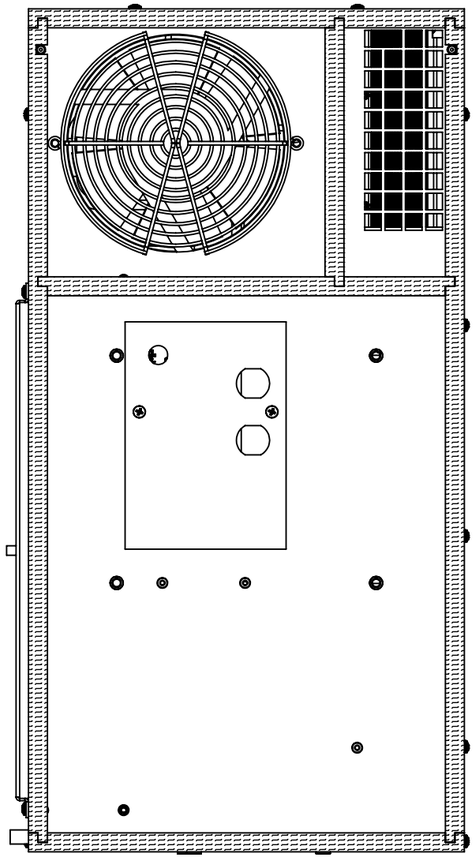

*IMPORTANT*
GASKET MUST BE
APPLIED AS SHOWN
FOR PROPER OPERATION
AND TO MAINTAIN
NEMA INTEGRITY.

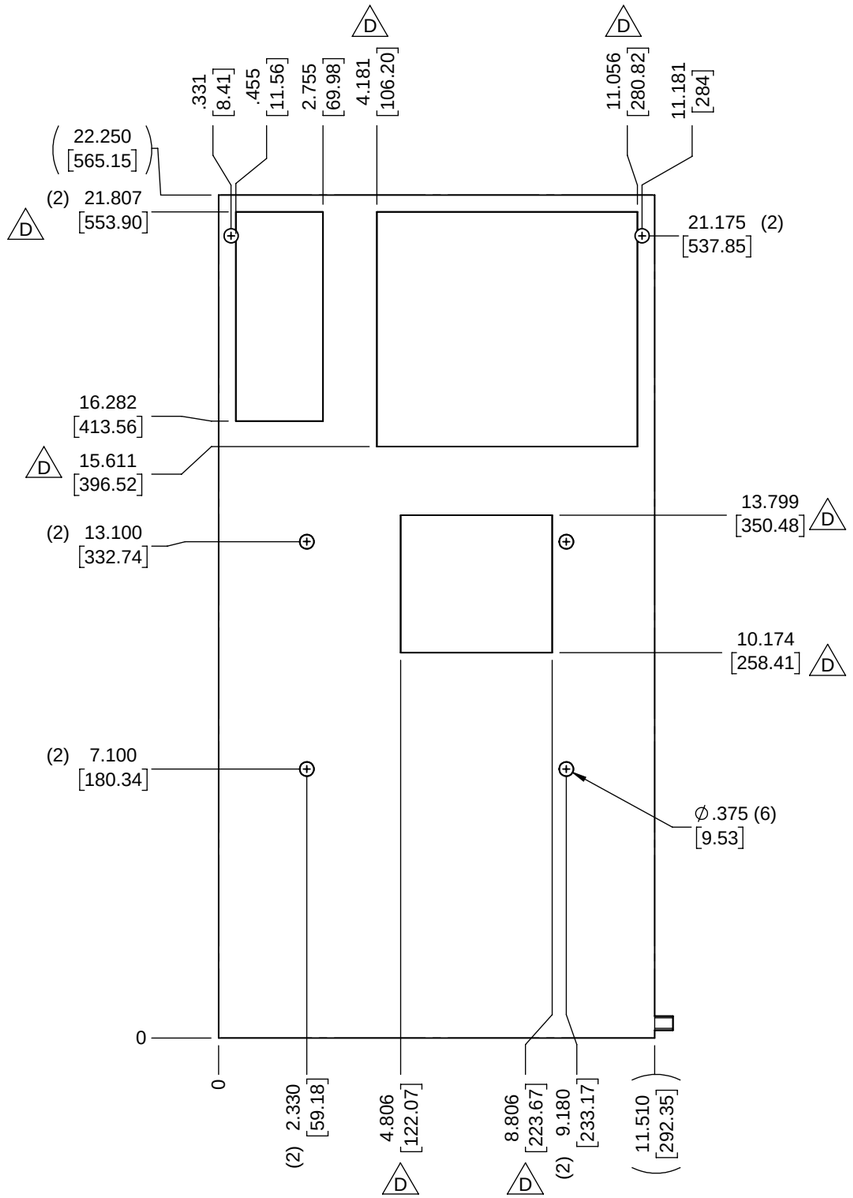


EVAP. OUTLET å 190 CFM
COND. OUTLET å 158 CFM
SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 60 dBA
SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA
CONDENSER INLET MIN. CLEARANCE 2.08"

| | | | |
|---|---|---|---|
| ITEM NUMBER *N/A* | USED ON *IQ1500VS* | UNLESS OTHERWISE SPECIFIED TOLERANCES .X ±.060, .XX ±.030, .XXX ±.015, FRACTIONAL ±1/4, ANGULAR ±1/2°, SURFACE FINISH 63 | ICE QUBE, INC. |
| MATERIAL *N/A* | | | THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC. |
| EST WT: lbs | | | DESCRIPTION *IQ1500VS SPEC DRAWING* |
| DRAWN BY *RCC* | DATE *04/06/2017* | SCALE *1:4* | DRAWING NUMBER *IQ351399* REV *D* |

DO NOT SCALE DRAWING
DIMENSIONS ARE INCHES