


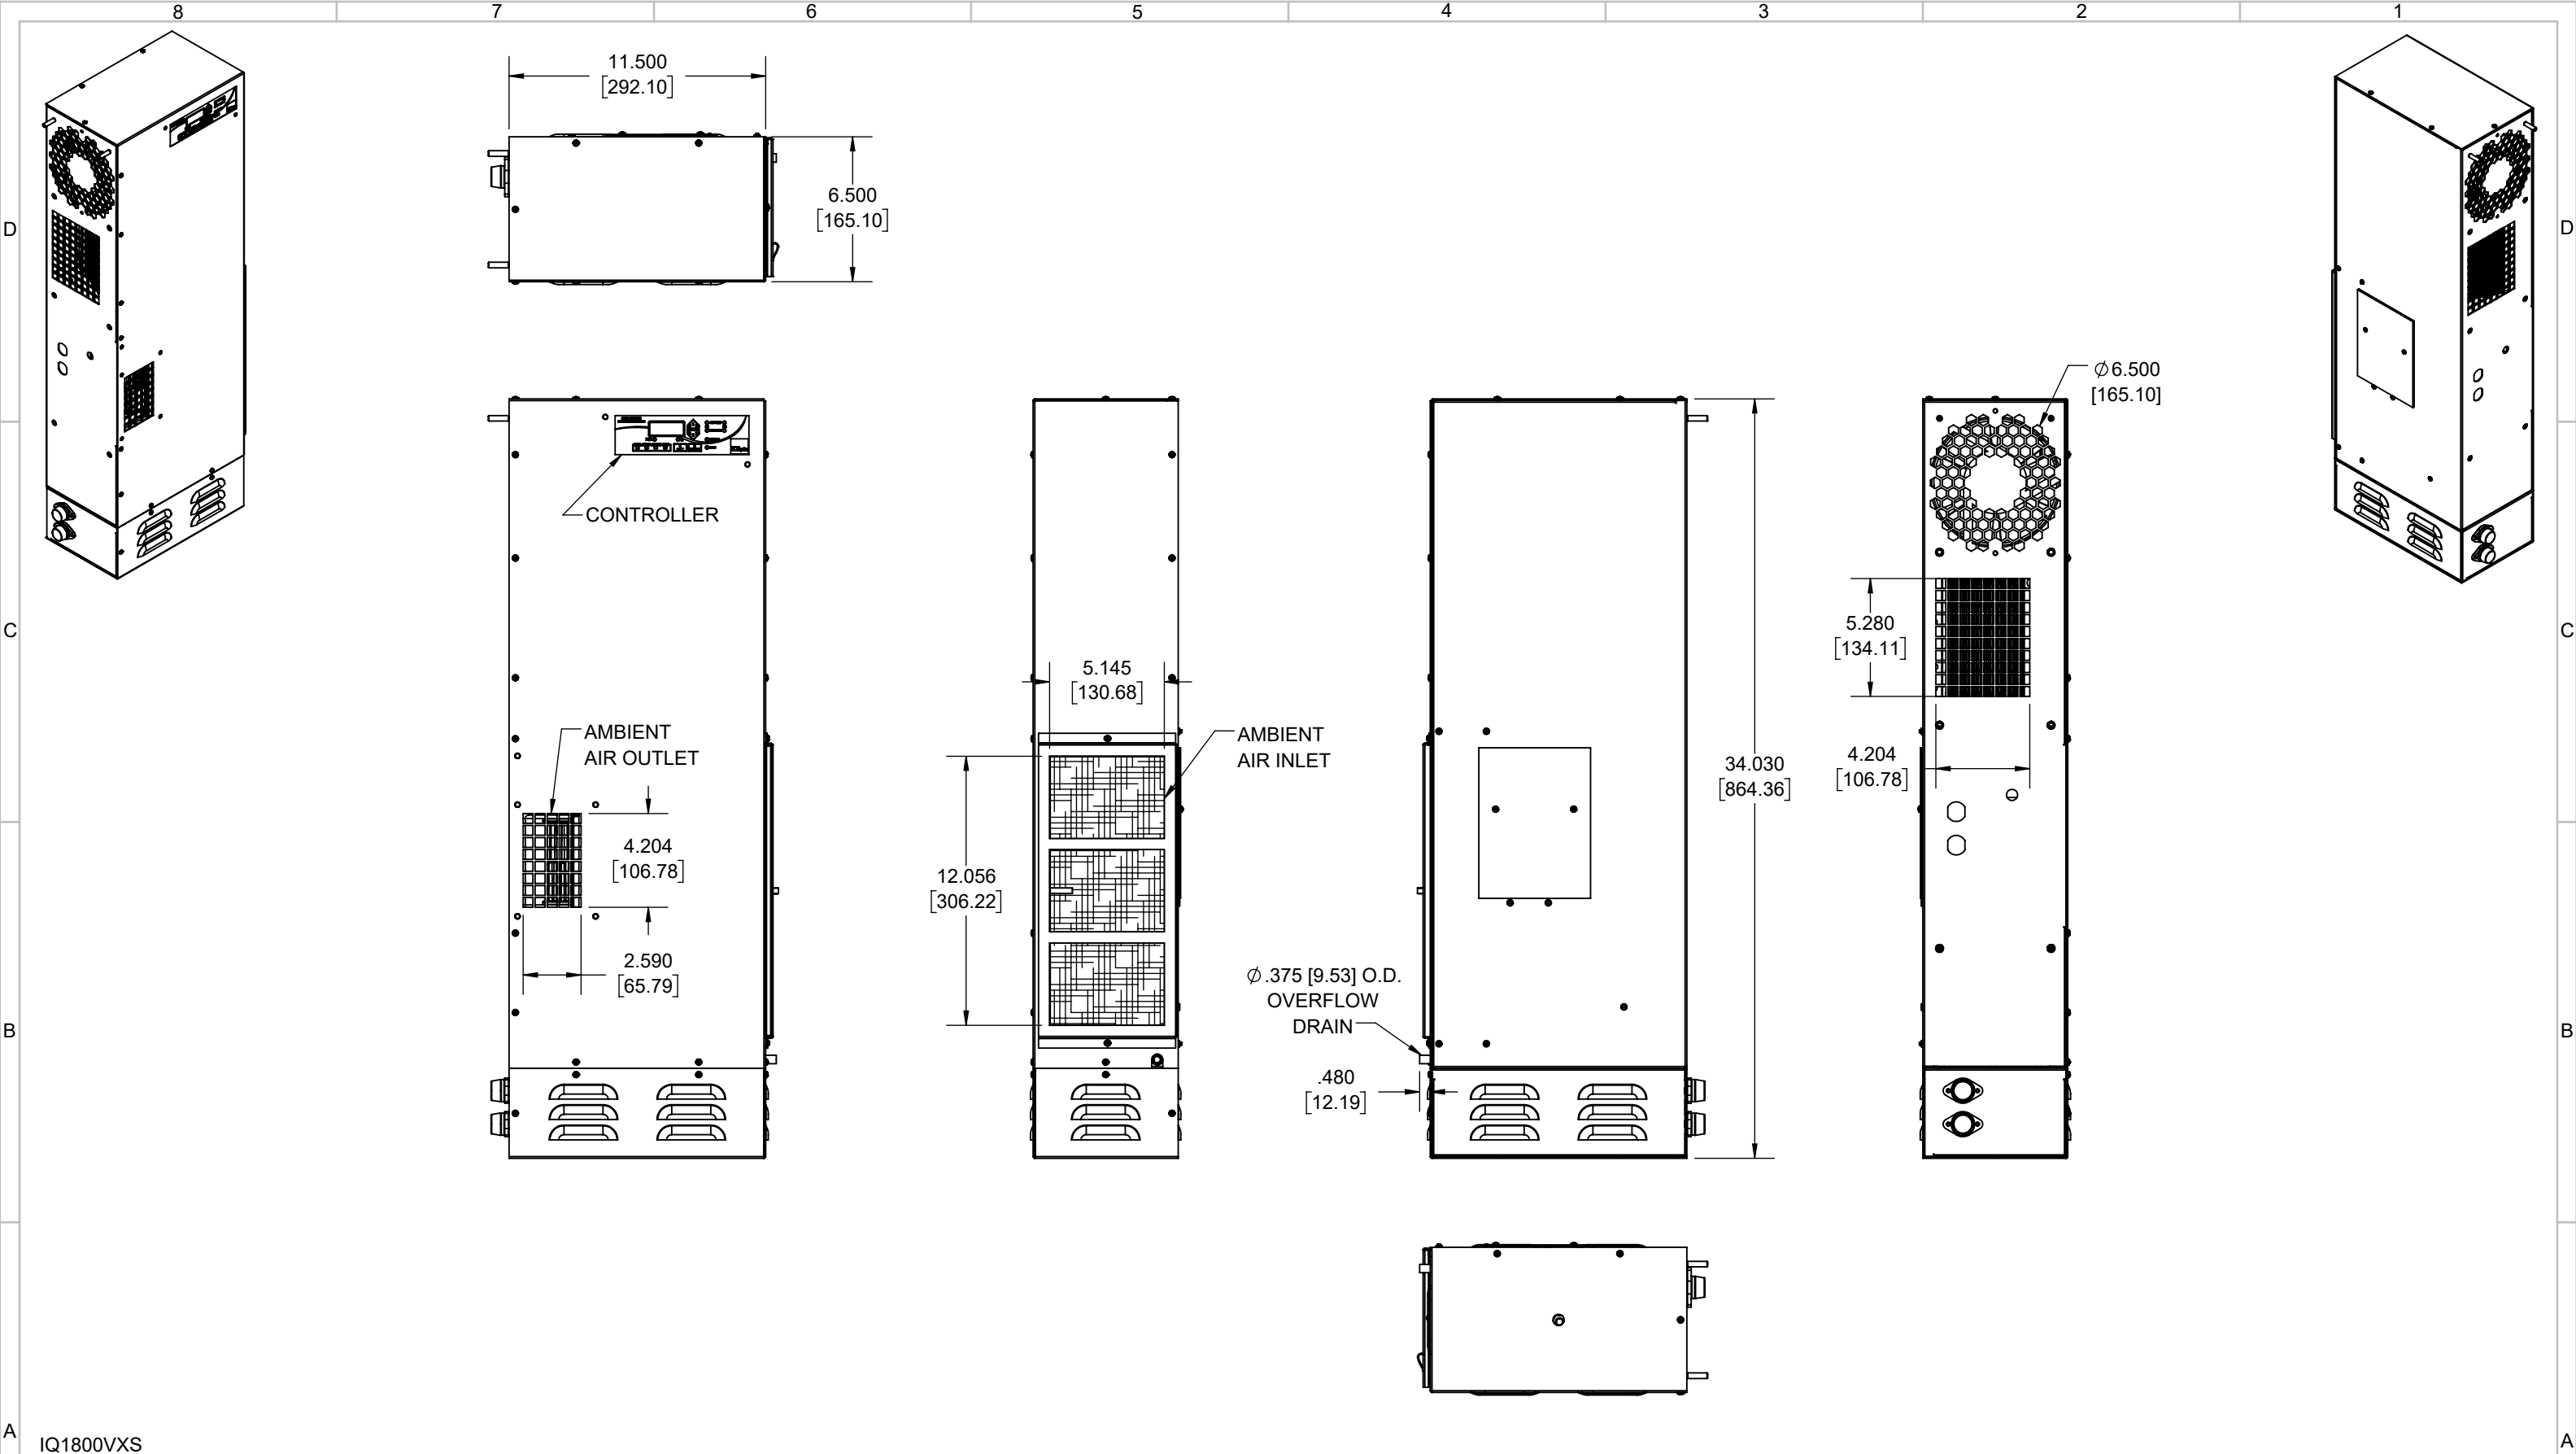

IQ1800VXS
COOLING CAPACITY: 1800 BTUH (528W) @131°F (55°C)
MAXIMUM AMPS: 1.0 (480W) @480V/60HZ
MAXIMUM OPERATING TEMP: 131°F (55°C)
MINIMUM OPERATING TEMP: -40°F (-40°C)
DIMENSIONS: 34.03" (864MM) H X 6.50" (165MM) W X 11.50" (292MM) D
WEIGHT: 59 LBS (26.8KG)


REVISION						
REV	REVISION	CHG	DATE	APP	DATE	CN #
C	ADDED CFM, dBA, AND CLEARANCE	RCC	3/26/2018			1351
B	ADDED WATTAGE INFO	RCC	1/2/2018			
A	REDRAWN IN SW	RCC	4/7/2017			

ITEM NUMBER		USED ON	
N/A		IQ1800VXS	
MATERIAL			
N/A			

EST WT:	lbs
DRAWN BY	DATE
RCC	4/7/2017
SCALE	1:7

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH	63
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.	
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
DESCRIPTION	
IQ1800VXS SPEC DRAWING, 480V	
DRAWING NUMBER	REV
IQ351406	C

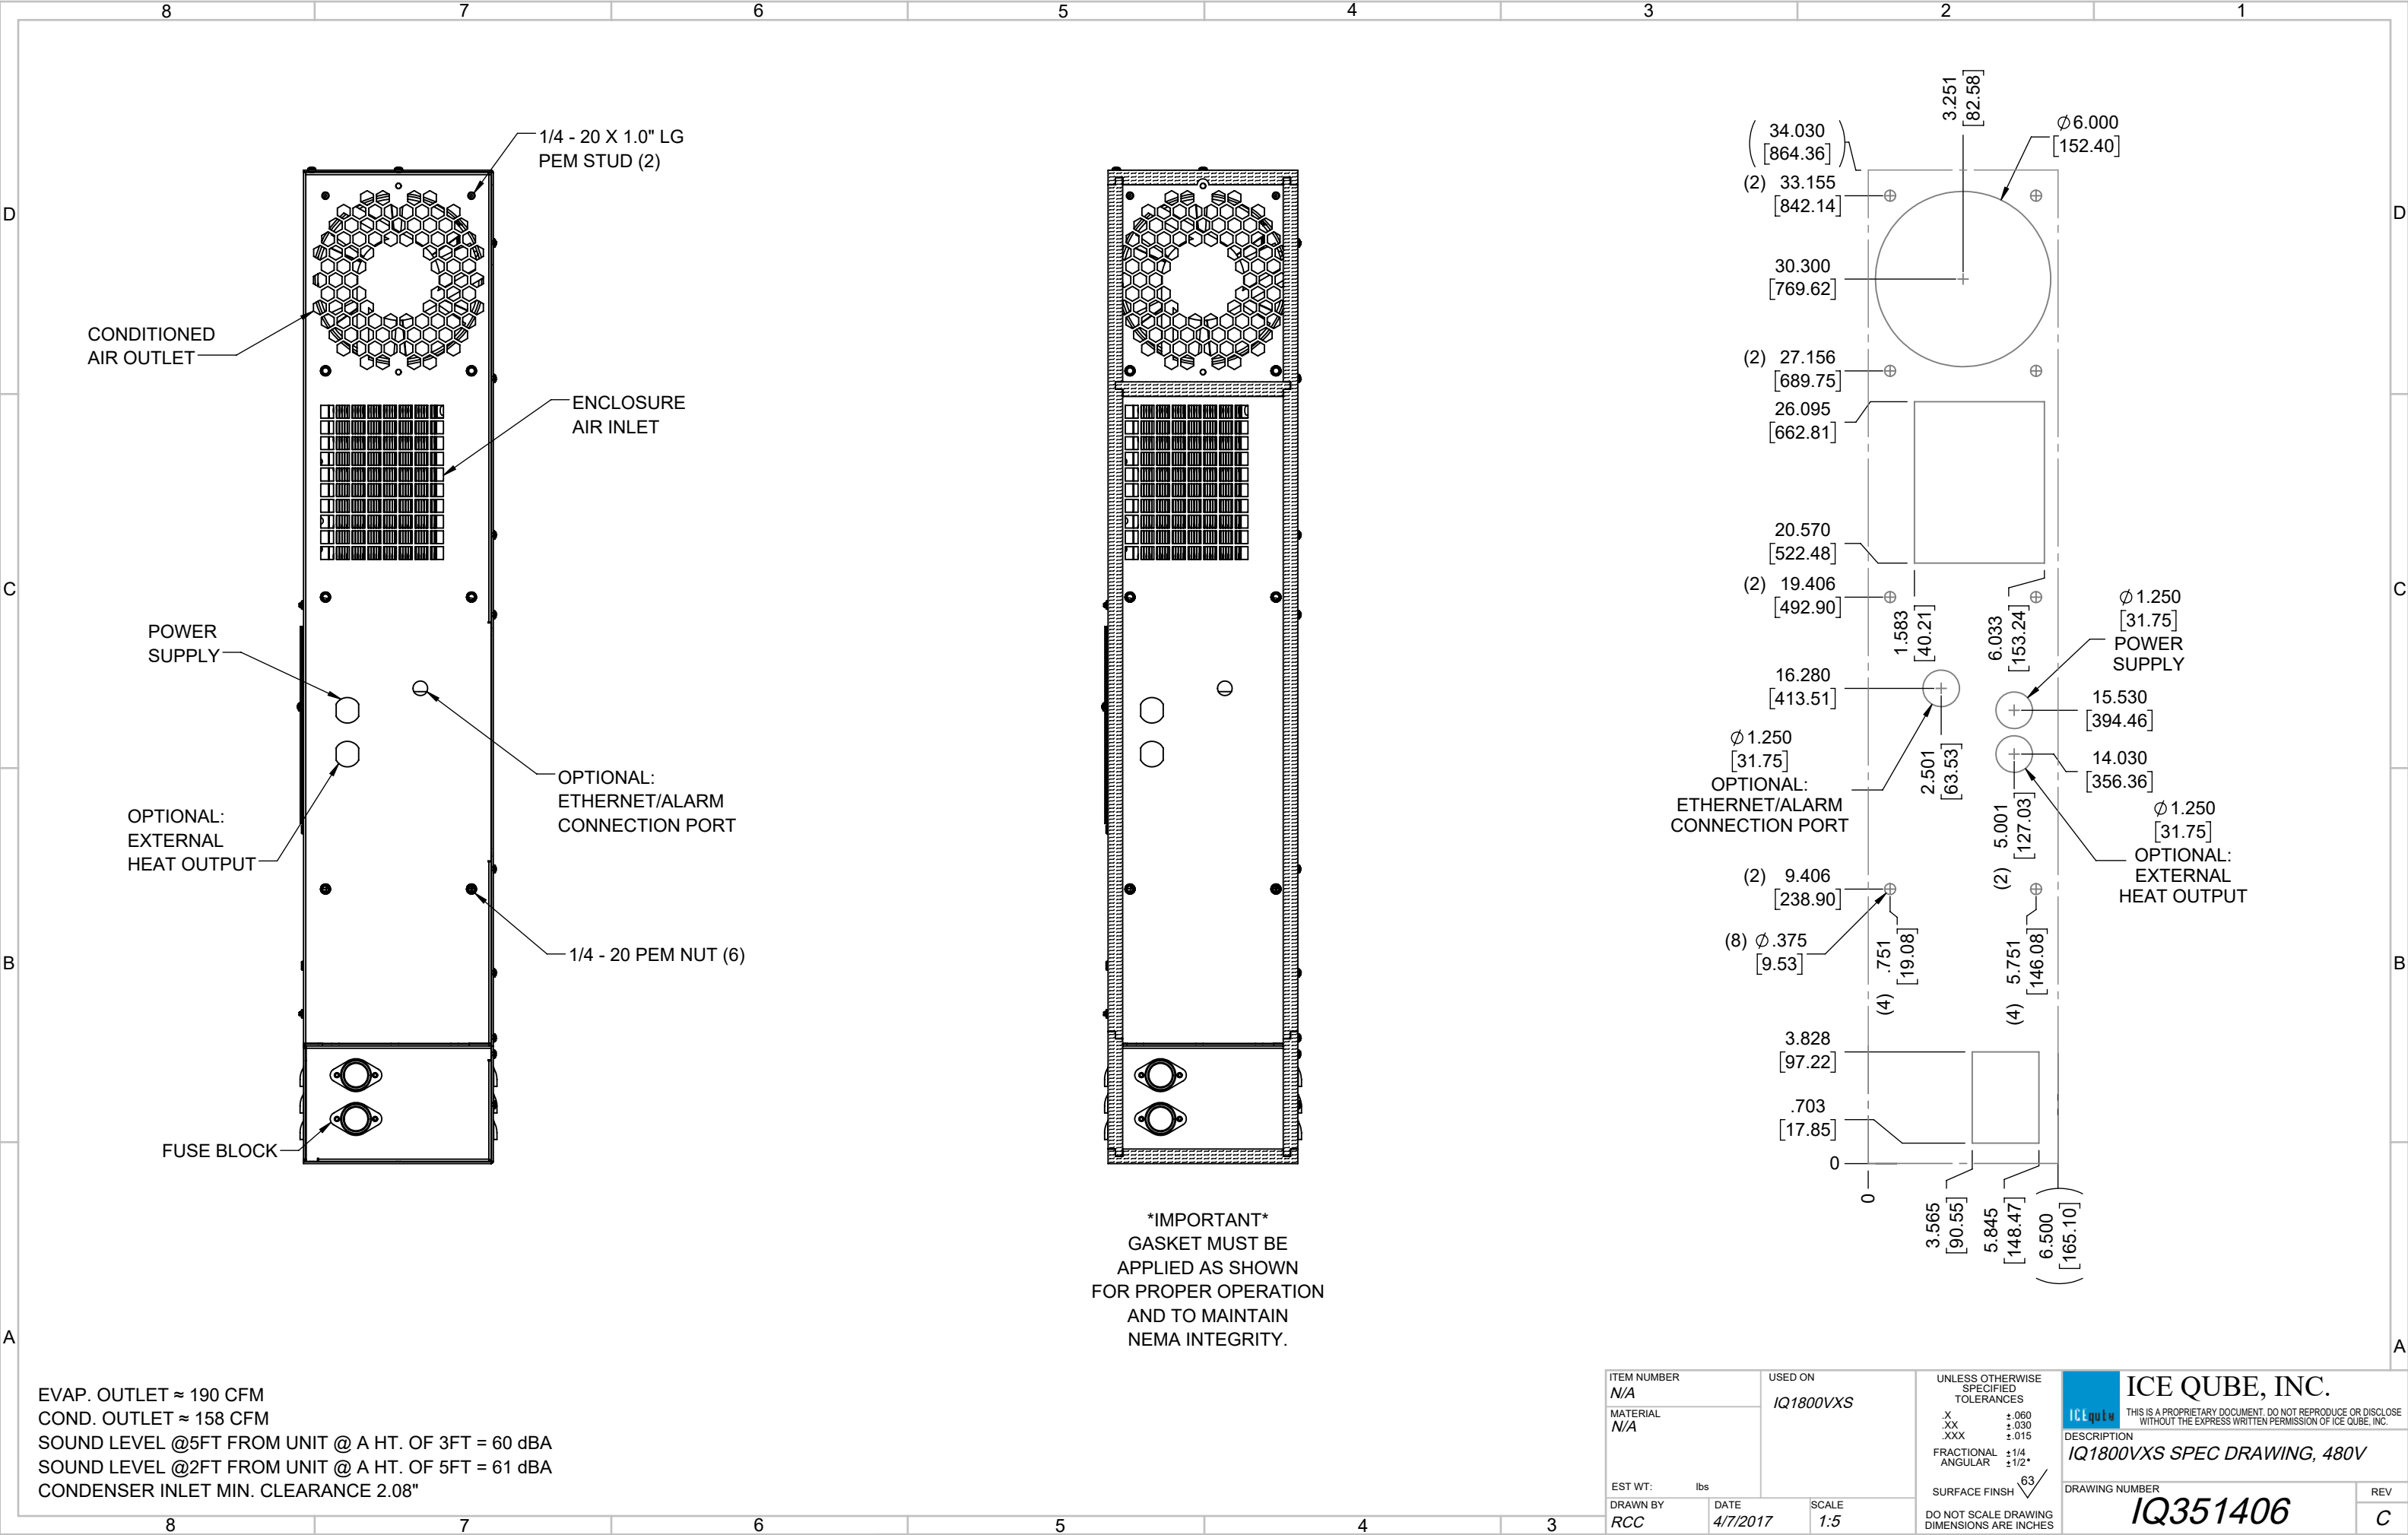

EVAP. OUTLET ≈ 190 CFM
COND. OUTLET ≈ 158 CFM
SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 60 dBA
SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA
CONDENSER INLET MIN. CLEARANCE 2.08"

ITEM NUMBER <i>N/A</i>		USED ON <i>IQ1800VXS</i>		UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2° SURFACE FINISH 63		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
MATERIAL <i>N/A</i>						DESCRIPTION <i>IQ1800VXS SPEC DRAWING, 480V</i>	
EST WT: lbs		DRAWN BY <i>RCC</i>		DATE <i>4/7/2017</i>		DRAWING NUMBER <i>IQ351406</i>	
		SCALE <i>1:5</i>		DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		REV <i>C</i>	