



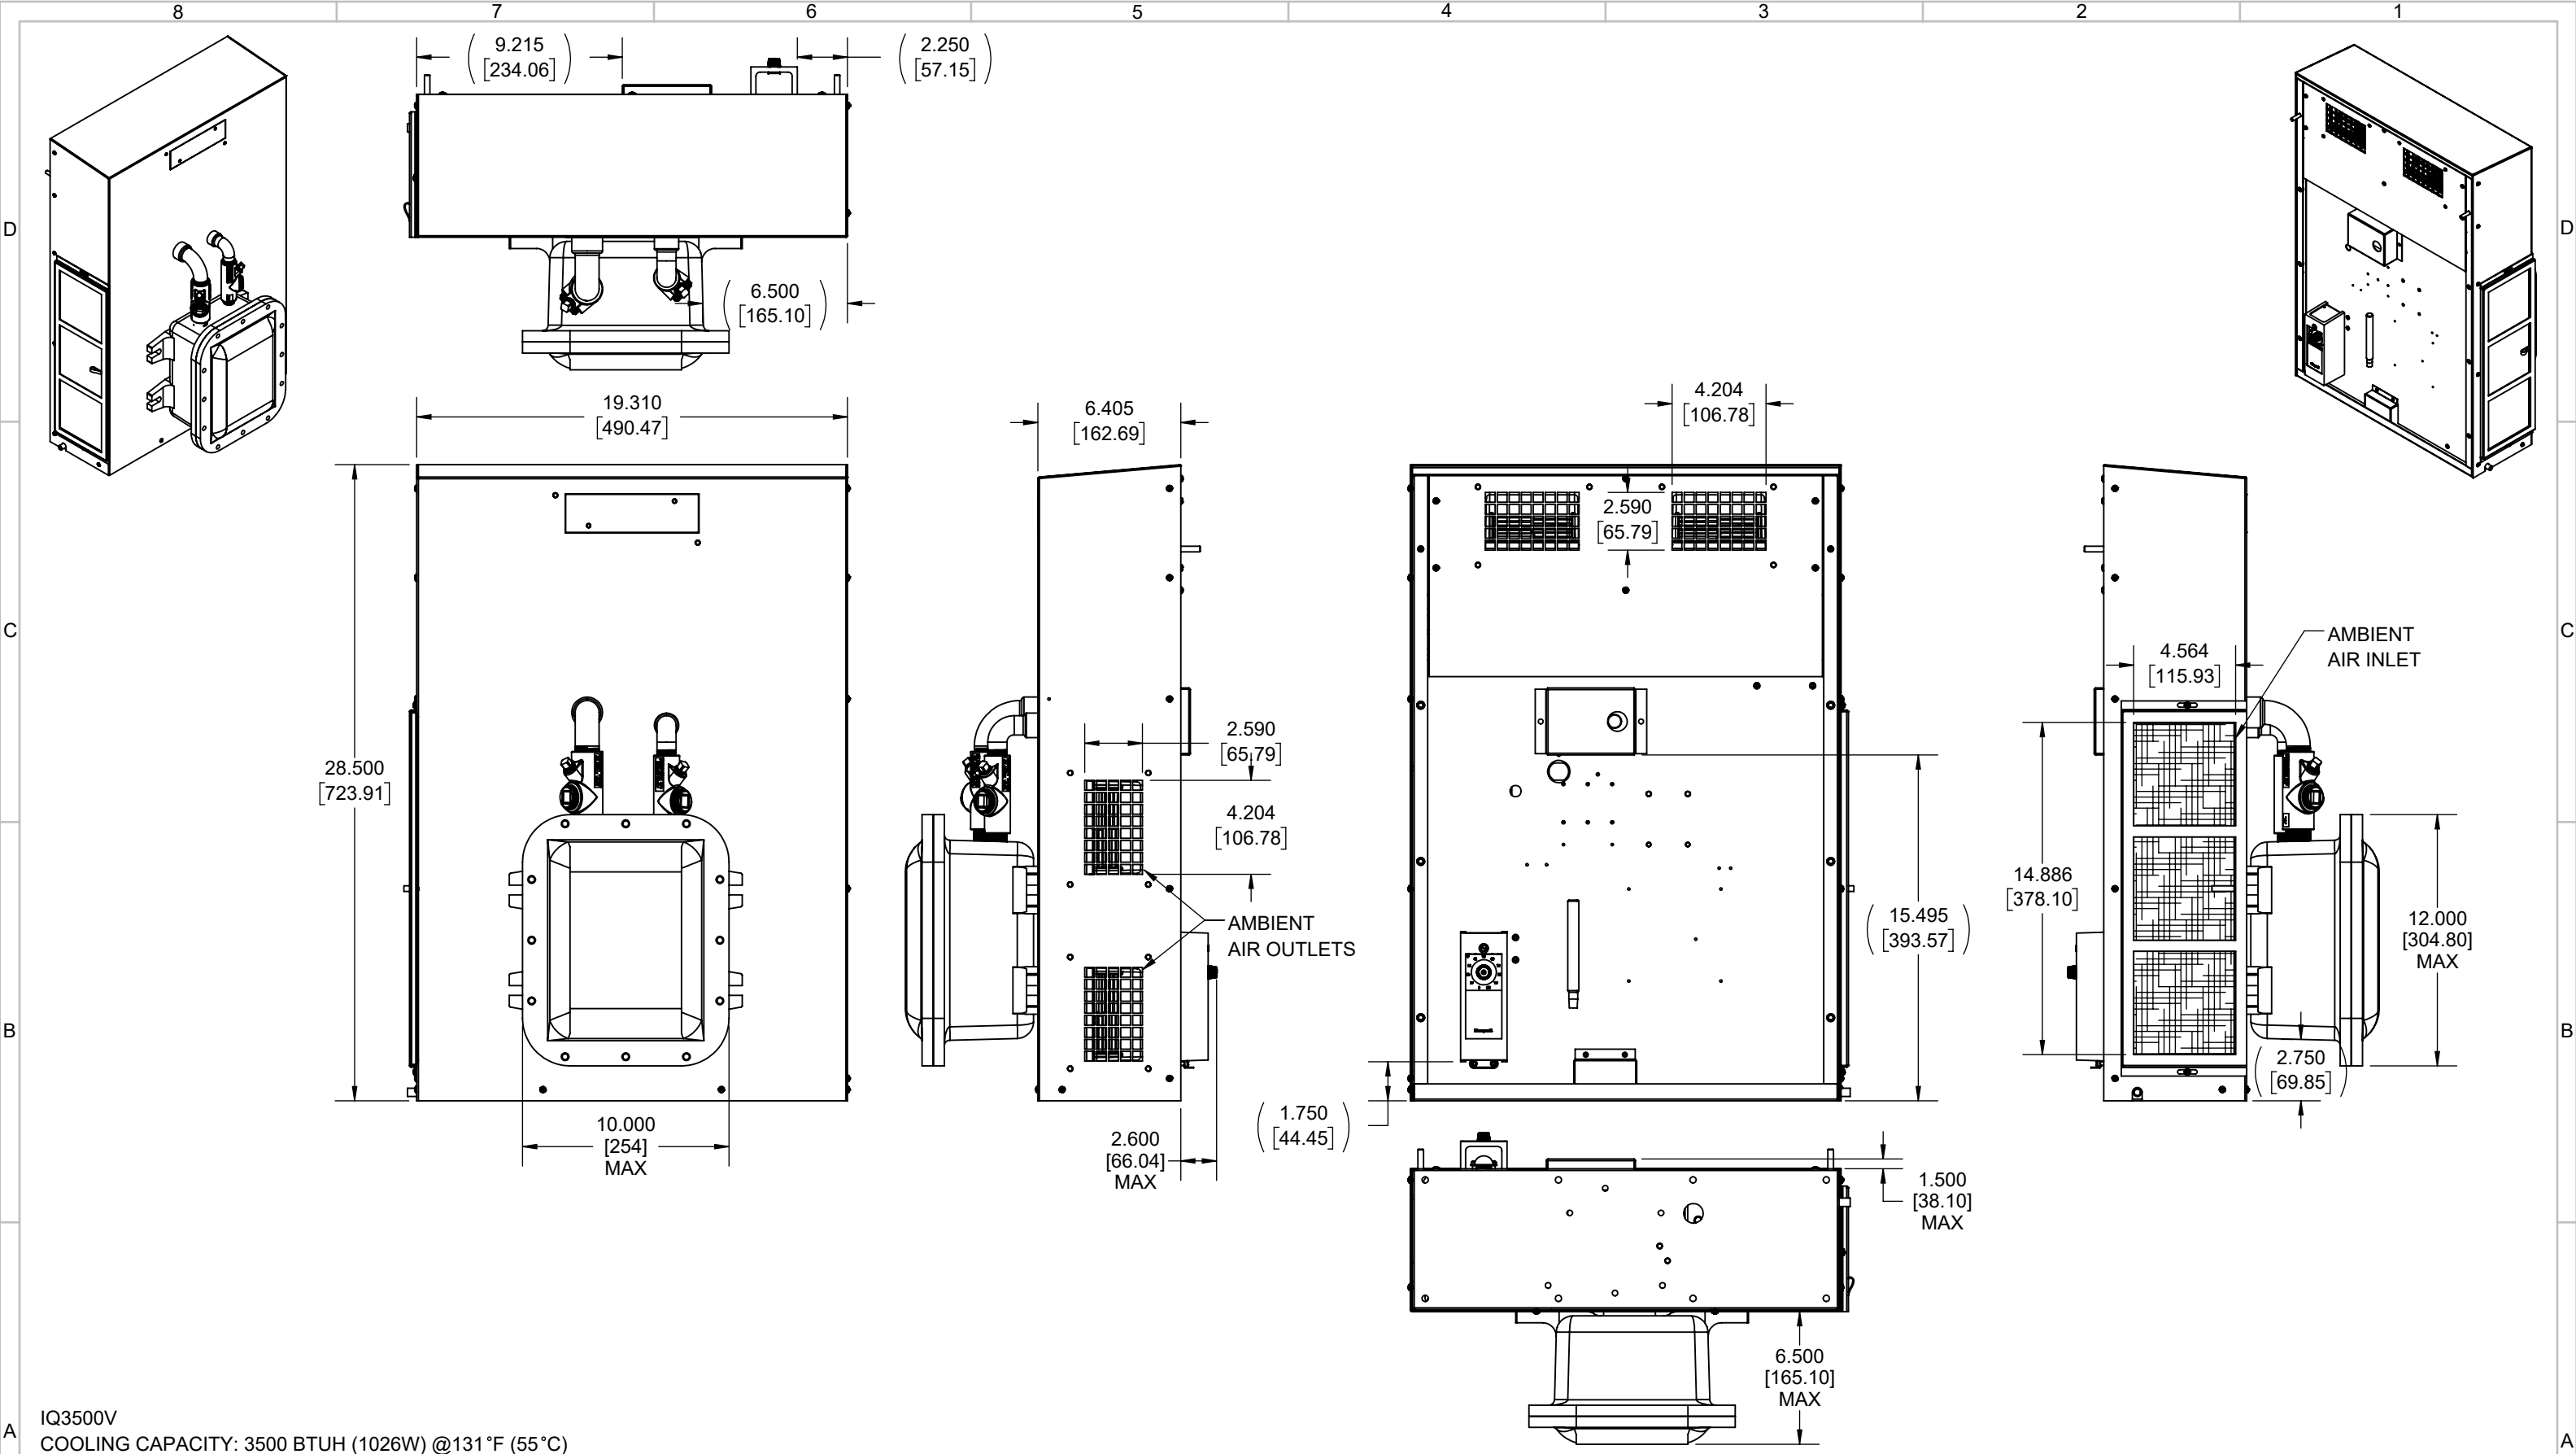

IQ3500V
COOLING CAPACITY: 3500 BTUH (1026W) @131°F (55°C)
MAXIMUM AMPS: 9.3 (1116W) @120V/60HZ
MAXIMUM AMPS: 4.9/5.4 (1127/1188W) @230/220V 60/50HZ
MAXIMUM OPERATING TEMP: 131°F (55°C)
MINIMUM OPERATING TEMP: -4°F (-20°C)
DIMENSIONS: 28.50" (724MM) H X 19.31" (490MM) W X 6.41" (163MM) D
WEIGHT: 104 LBS (47.3KG)

							ITEM NUMBER N/A		USED ON IQ3500V		UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/16 ANGULAR ±1/2° SURFACE FINISH  DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		 ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.		
							MATERIAL N/A								
C	ADDED CFM, dBA, AND CLEARANCE INFO					RCC	3/29/2018				1351	DESCRIPTION IQ3500V SPEC DRAWING XP2 DRAWING NUMBER IQ351426		REV C	
B	ADDED WATTAGE INFO					RCC	1/3/2018								
A	REDRAWN IN SW					RCC	4/13/2017								
REV	REVISION					CHG	DATE	APP	DATE	CN #					

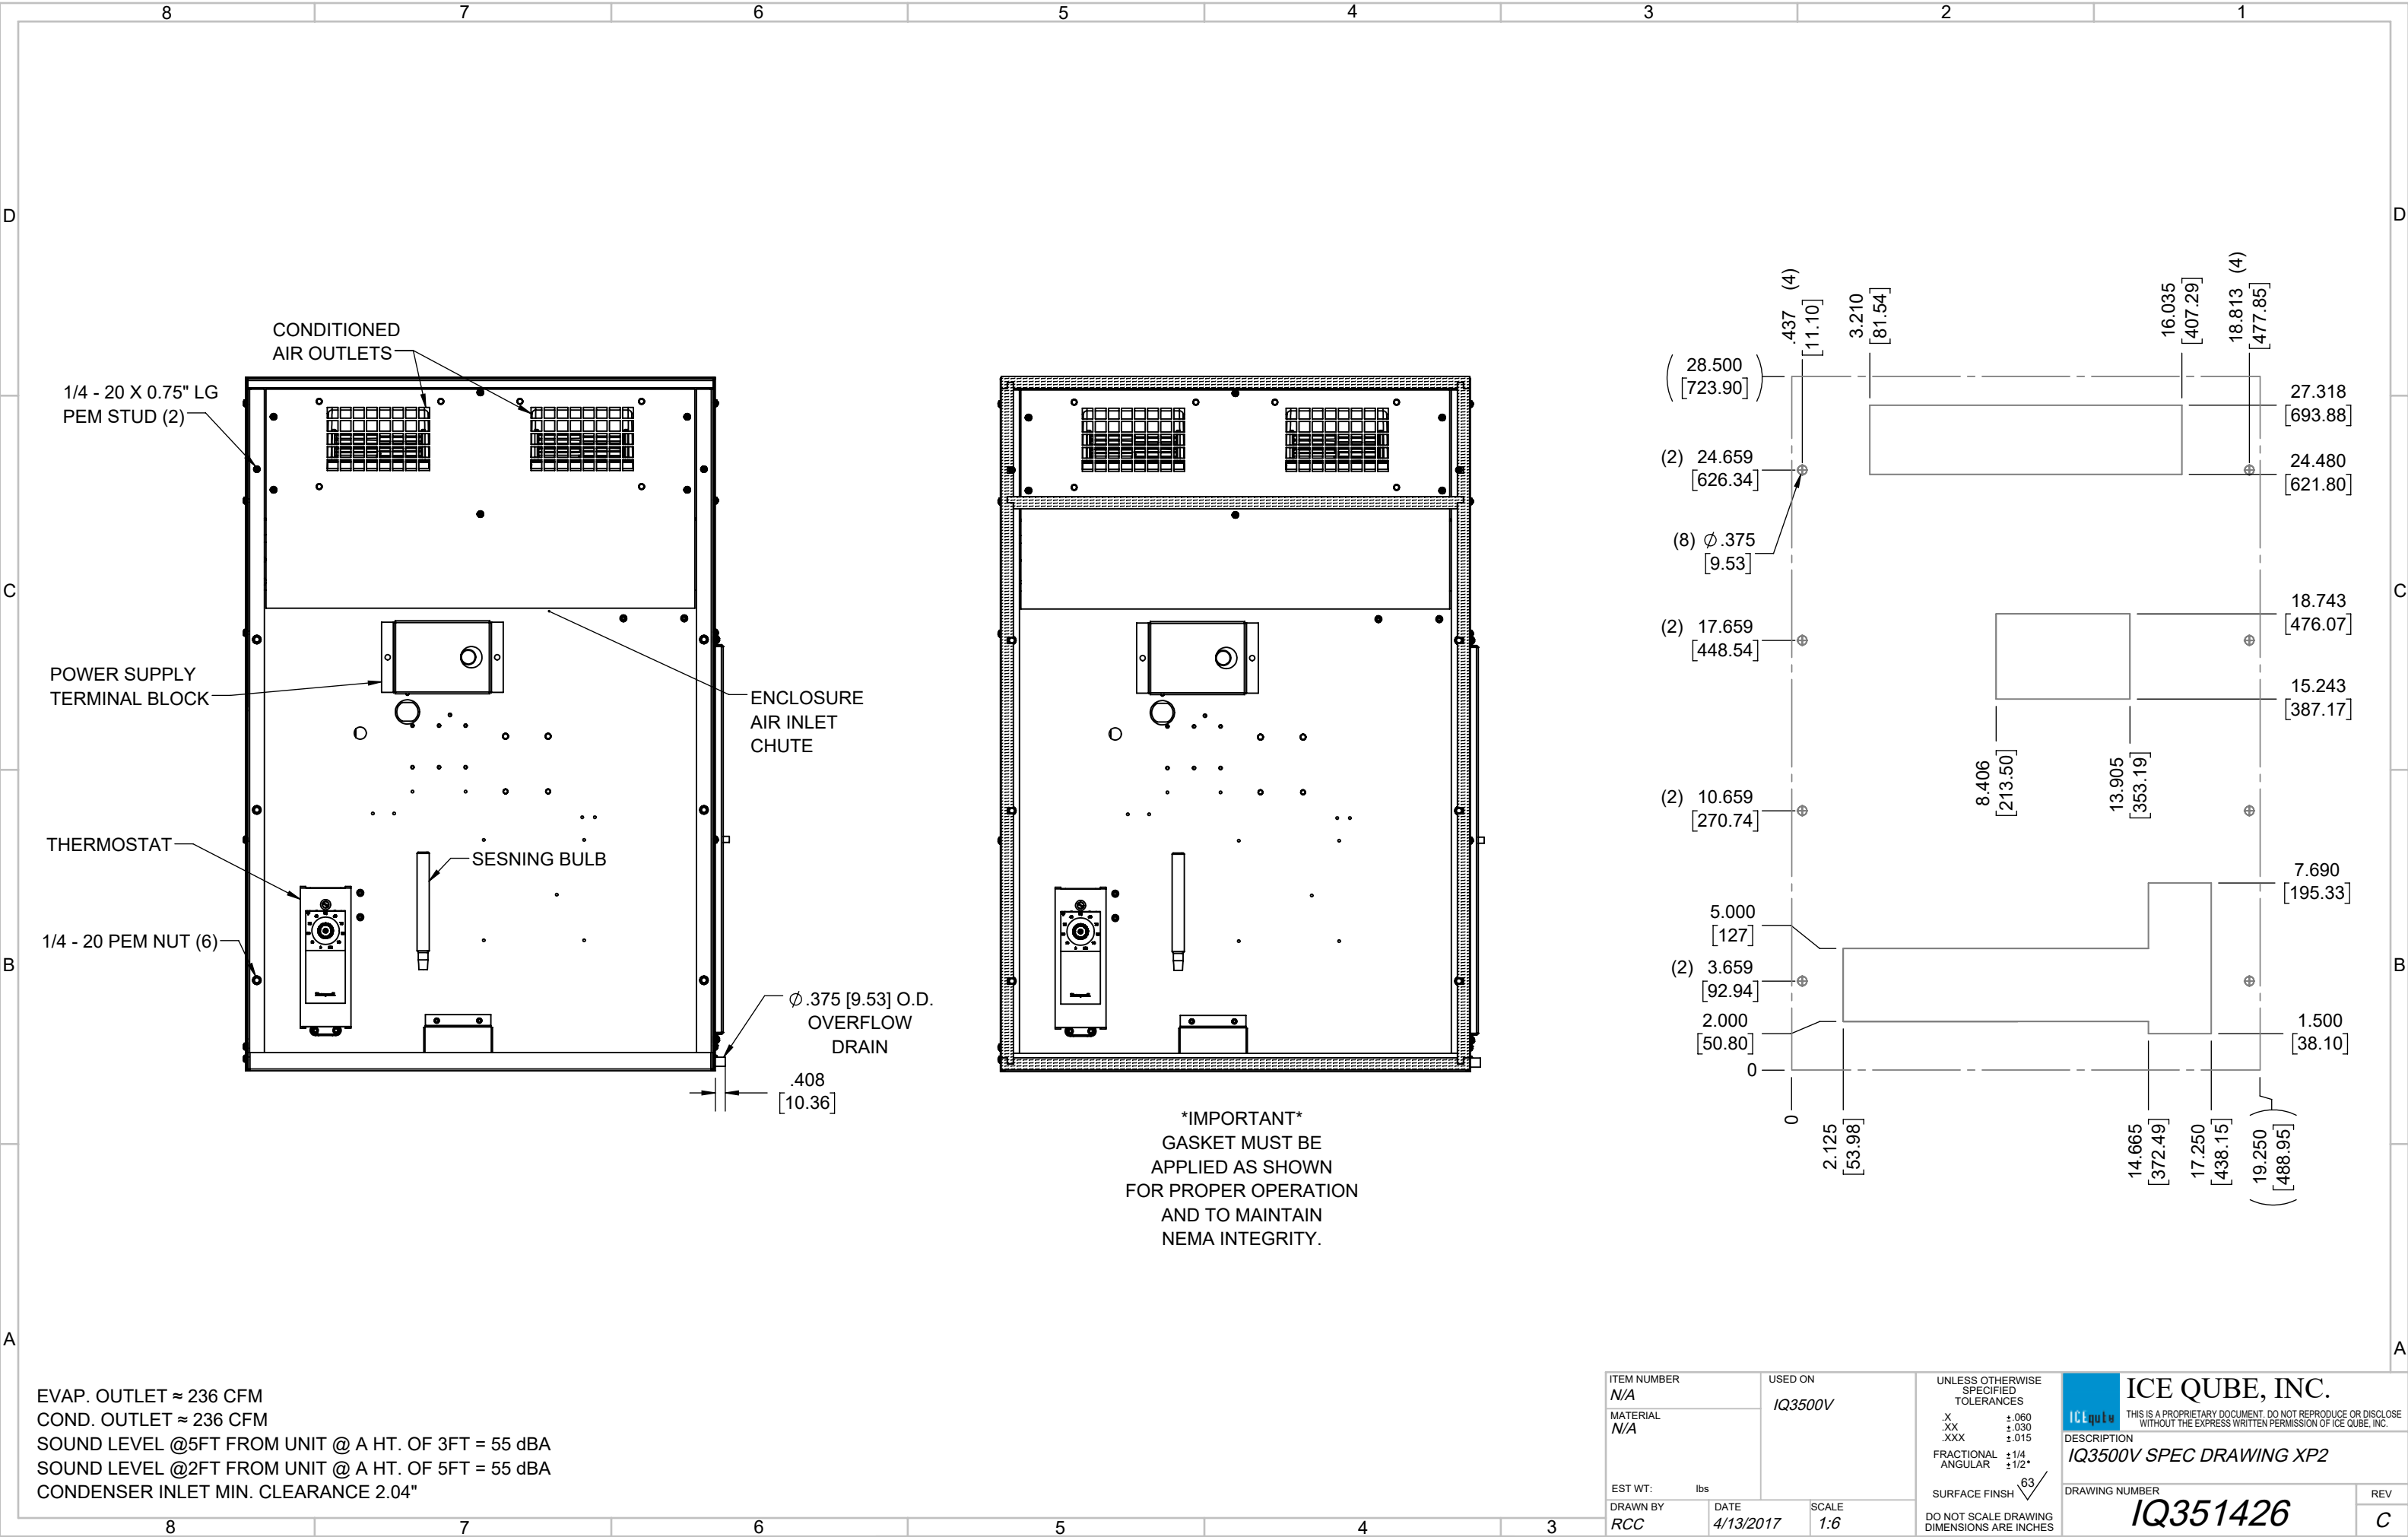

EVAP. OUTLET ≈ 236 CFM
COND. OUTLET ≈ 236 CFM
SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 55 dBA
SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 55 dBA
CONDENSER INLET MIN. CLEARANCE 2.04"

ITEM NUMBER N/A		USED ON IQ3500V		UNLESS OTHERWISE SPECIFIED TOLERANCES .X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
MATERIAL N/A				SURFACE FINISH 63		DESCRIPTION IQ3500V SPEC DRAWING XP2	
EST WT: lbs		DRAWN BY RCC		DATE 4/13/2017		DRAWING NUMBER IQ351426	
		SCALE 1:6		DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		REV C	