



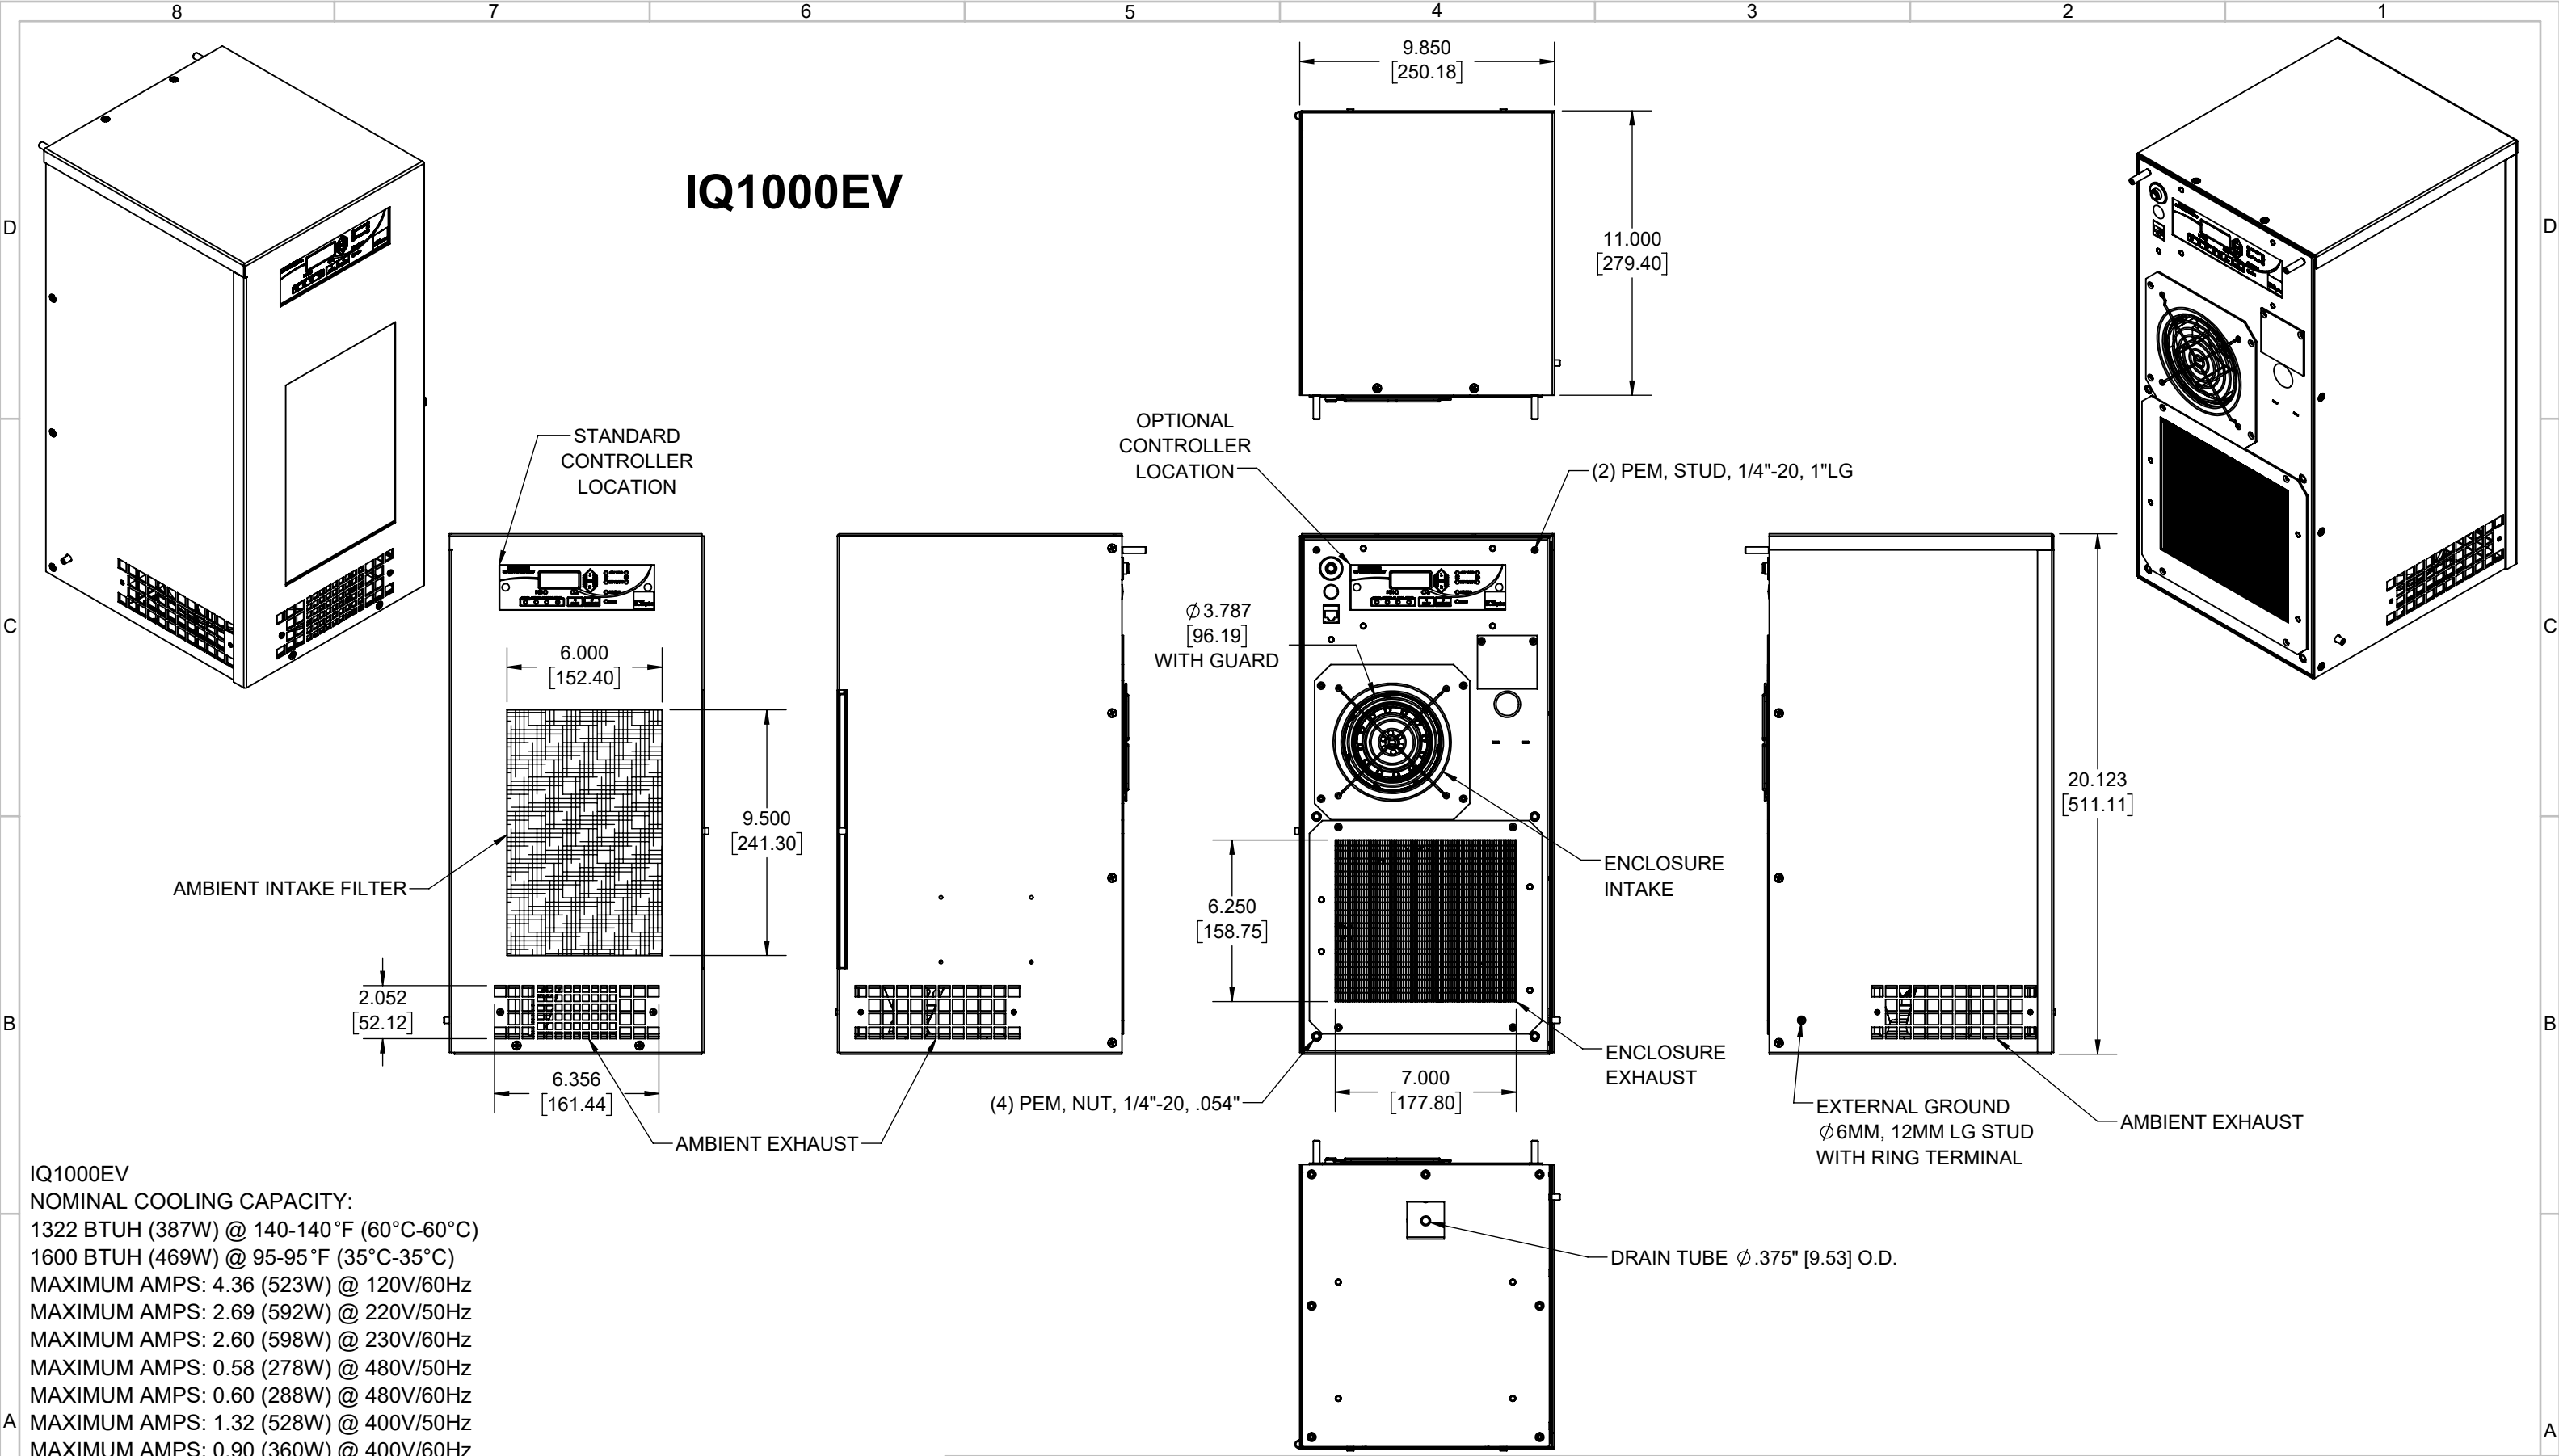

IQ1000EV
NOMINAL COOLING CAPACITY:
1322 BTUH (387W) @ 140-140°F (60°C-60°C)
1600 BTUH (469W) @ 95-95°F (35°C-35°C)
MAXIMUM AMPS: 4.36 (523W) @ 120V/60Hz
MAXIMUM AMPS: 2.69 (592W) @ 220V/50Hz
MAXIMUM AMPS: 2.60 (598W) @ 230V/60Hz
MAXIMUM AMPS: 0.58 (278W) @ 480V/50Hz
MAXIMUM AMPS: 0.60 (288W) @ 480V/60Hz
MAXIMUM AMPS: 1.32 (528W) @ 400V/50Hz
MAXIMUM AMPS: 0.90 (360W) @ 400V/60Hz
MAXIMUM OPERATING TEMPERATURE: 140°F (60°C)
DIMENSIONS: 20.123" (511MM) H x 9.850" (250MM) W x 11.000" (279MM) D
WEIGHT: 57.5 LBS (26.1KG) @ 120/220/230V
WEIGHT: 72.5 LBS (32.9KG) @ 400/480V
REFRIGERANT CHARGE: R134-A 7OZ (198G)

						ITEM NUMBER N/A		USED ON IQ1000EV		UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/16 ANGULAR ±1/2° SURFACE FINISH 63 DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC. DESCRIPTION IQ1000EV SPEC DRAWING DRAWING NUMBER IQ351465		REV C	
						MATERIAL N/A									
EST WT: lbs		DRAWN BY ART		DATE 11/6/2017		SCALE 1:6									
C	UPDATED CUTOUT DIMENSIONS	NAT	4/7/2020												
B	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	5/11/2018	ART	5/11/2018	1347									
A	PRODUCTION RELEASE	ART	11/6/2017	JGG	11/6/2017	1331									
REV	REVISION	CHG	DATE	APP	DATE	CN #									

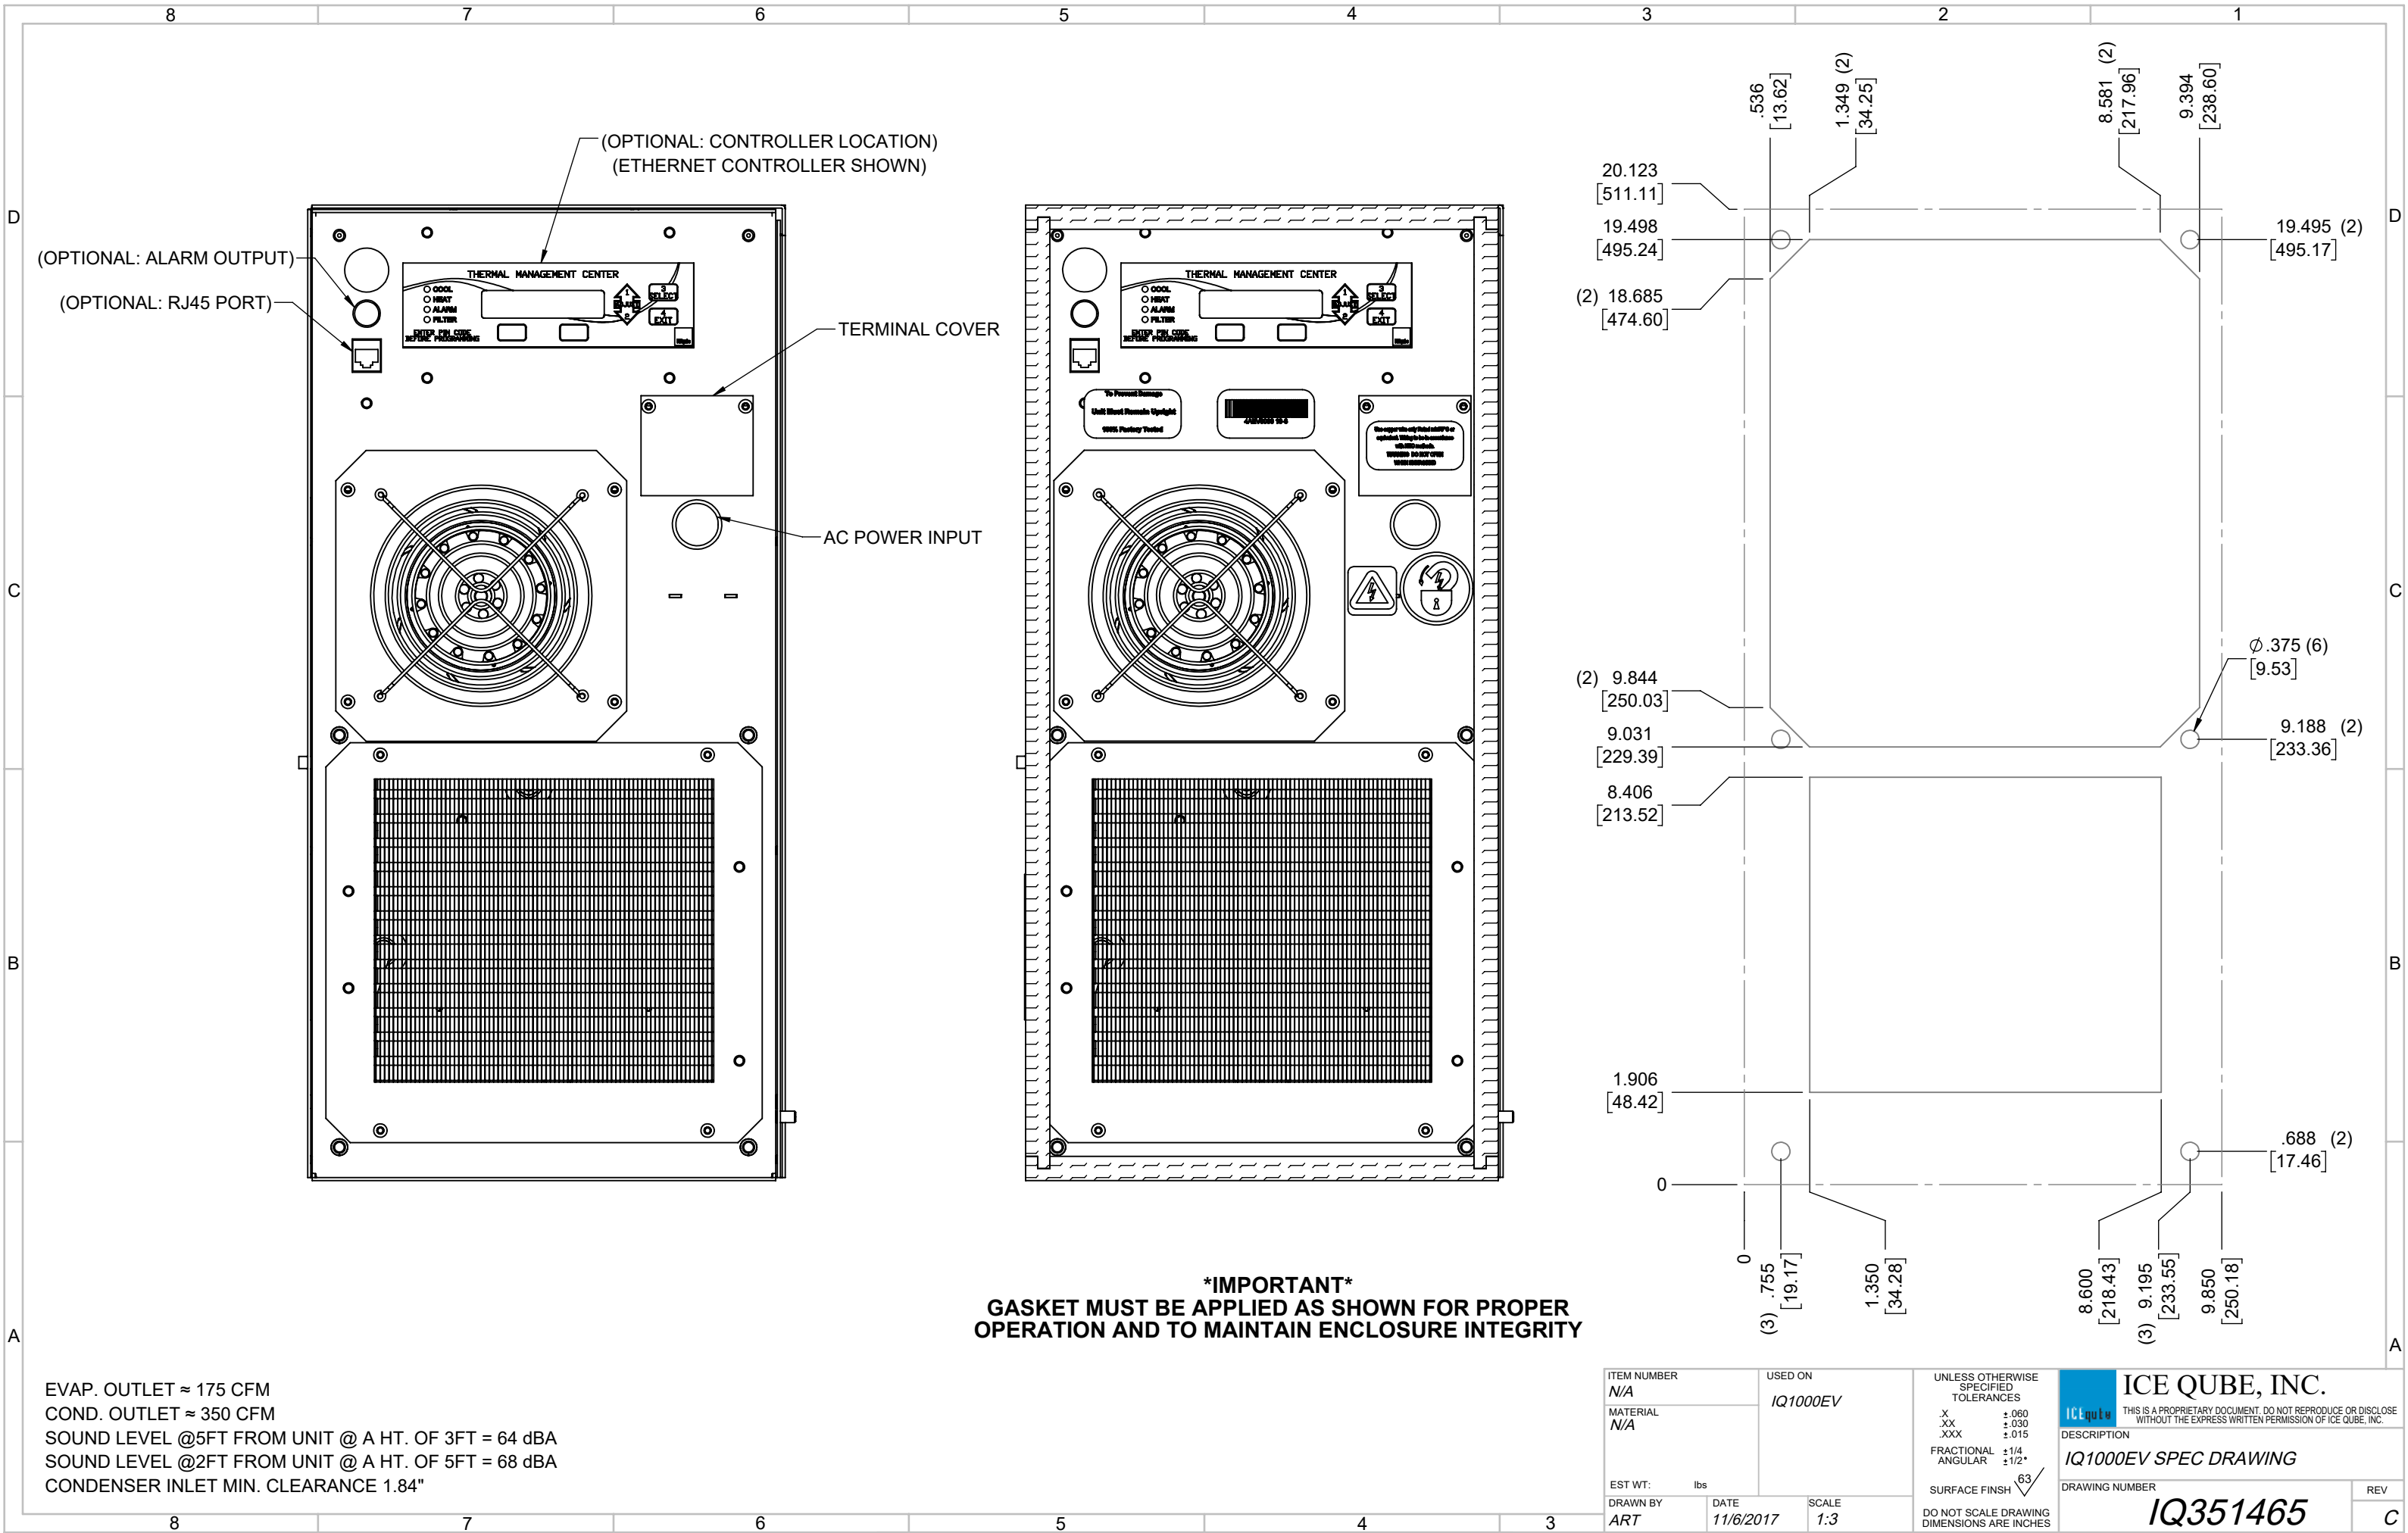

EVAP. OUTLET ≈ 175 CFM
COND. OUTLET ≈ 350 CFM
SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 64 dBA
SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 68 dBA
CONDENSER INLET MIN. CLEARANCE 1.84"

ITEM NUMBER N/A		USED ON IQ1000EV		UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 XX ±.030 XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
MATERIAL N/A				SURFACE FINISH 63		DESCRIPTION IQ1000EV SPEC DRAWING	
EST WT. lbs		DRAWN BY ART		DATE 11/6/2017		SCALE 1:3	
						DRAWING NUMBER IQ351465	
						REV C	