


IQ20000EV

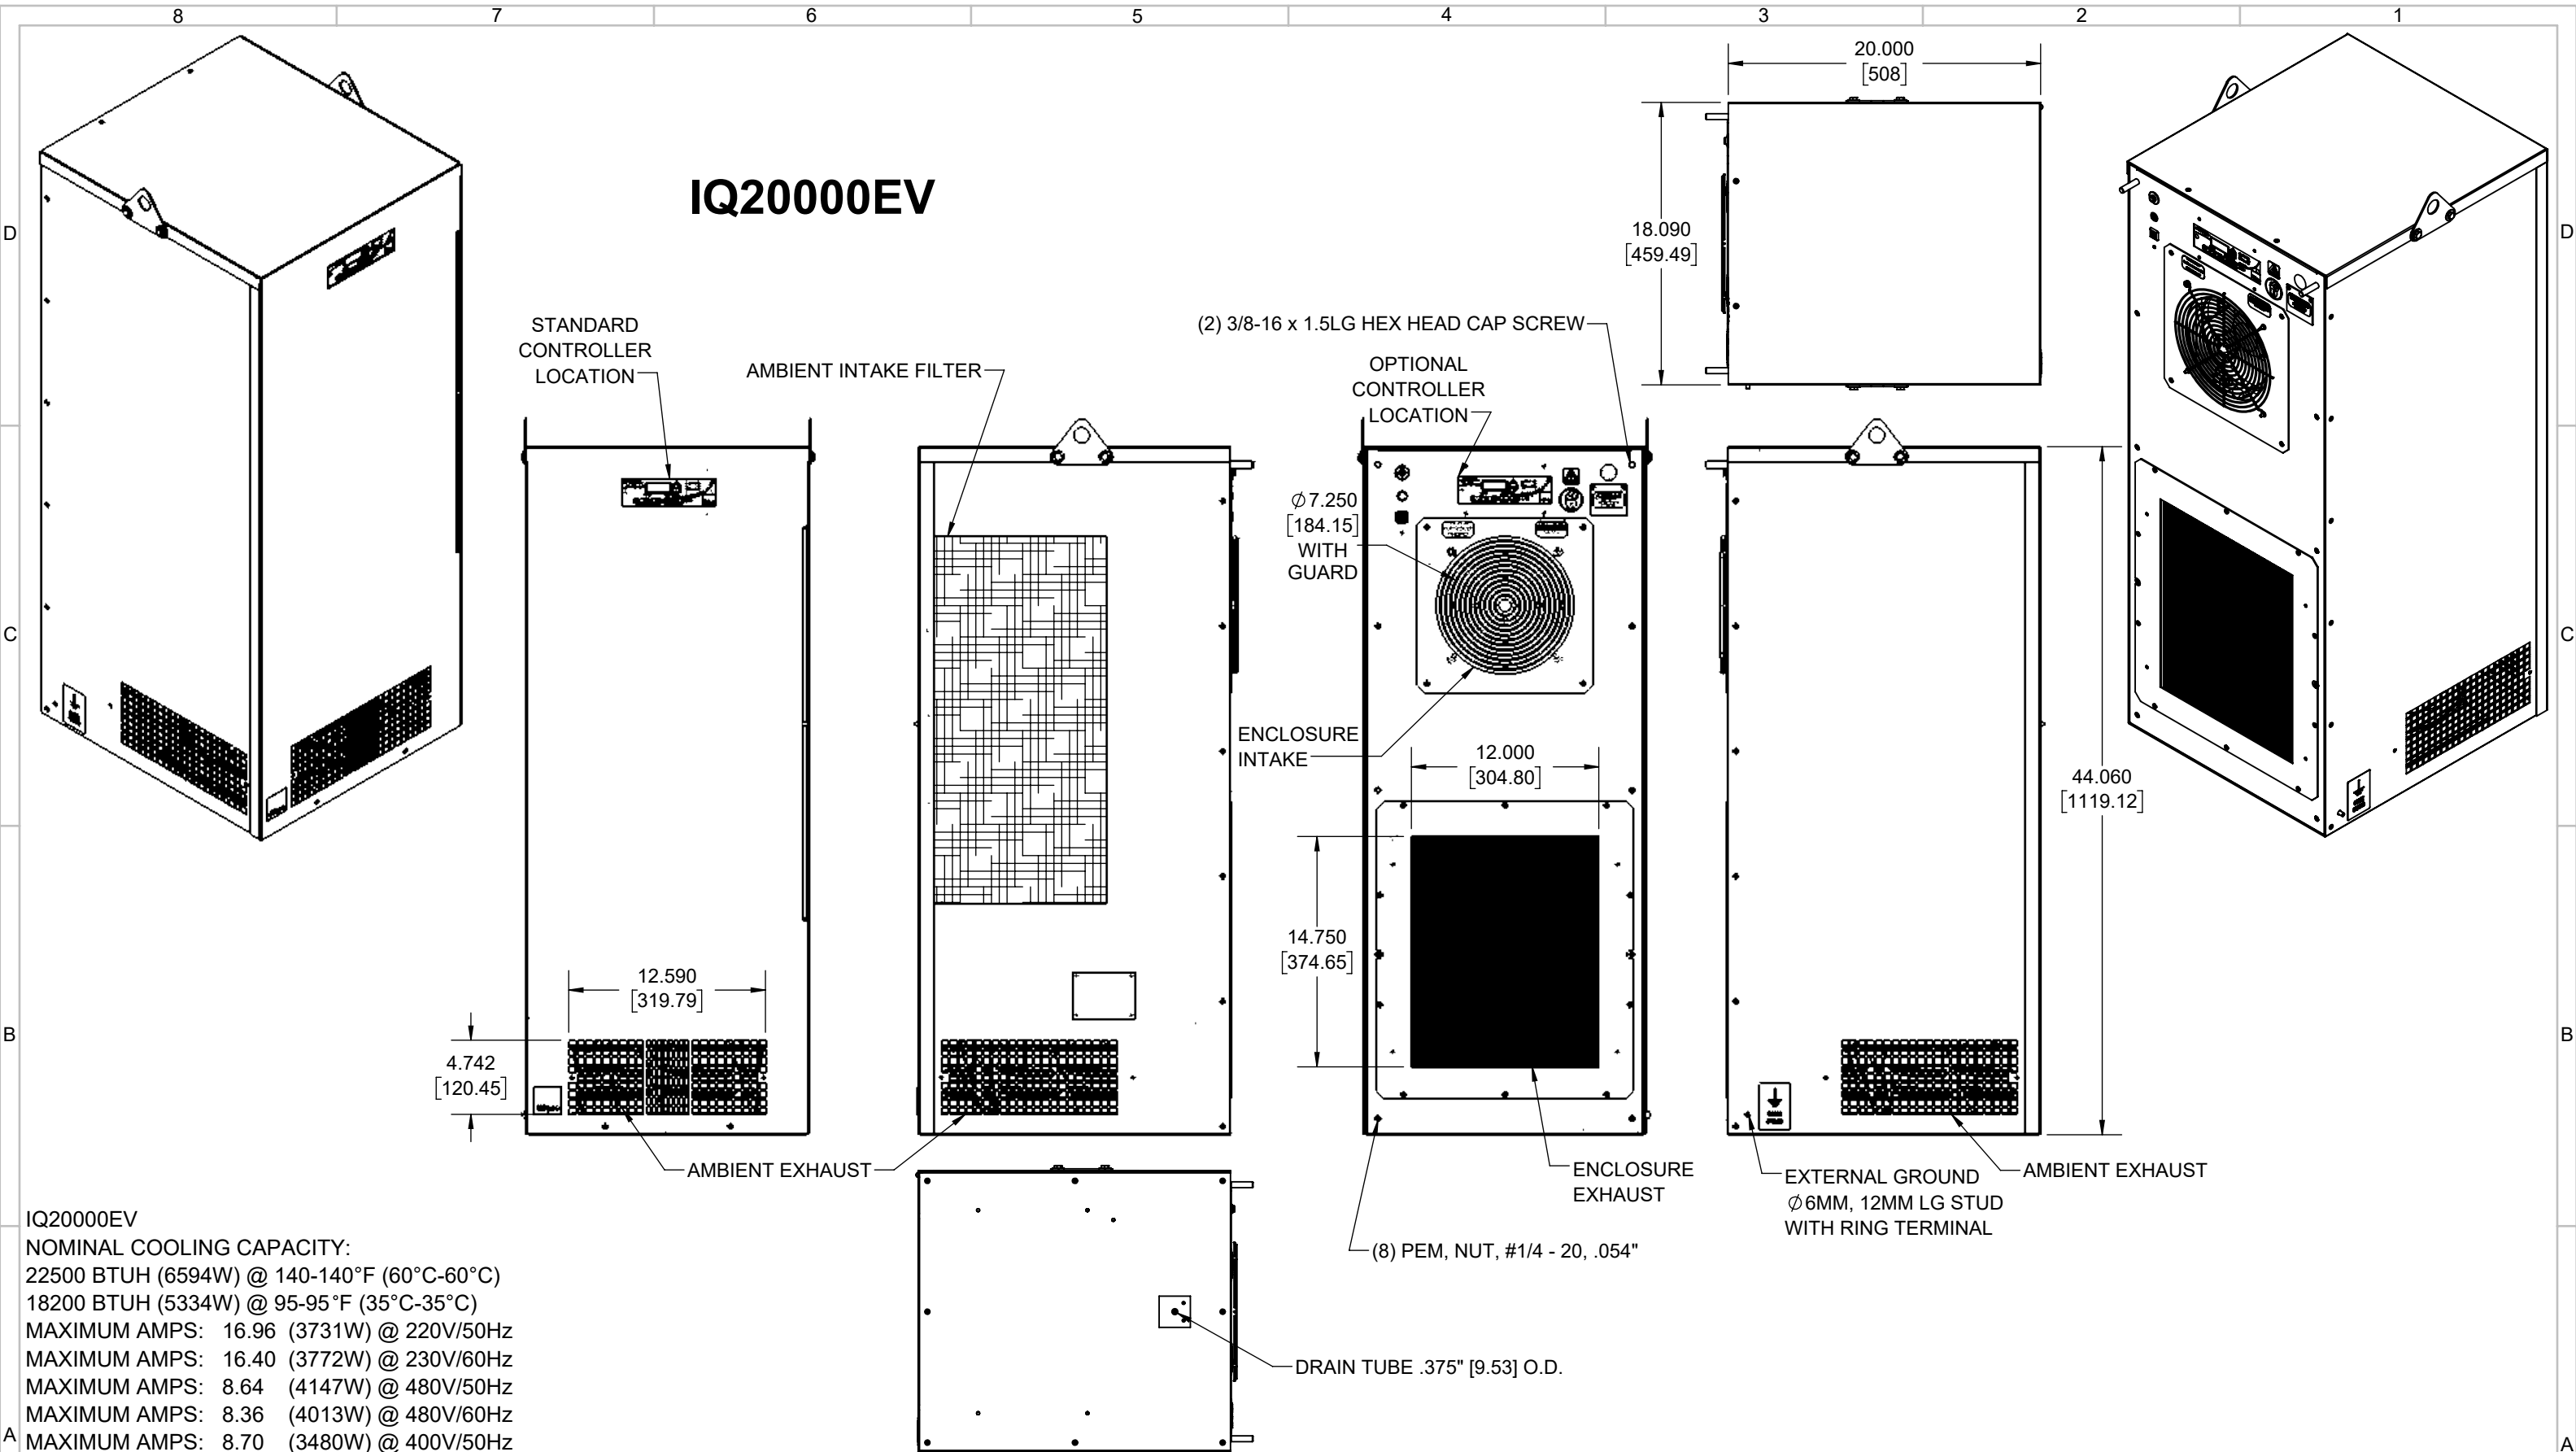



IQ20000EV
 NOMINAL COOLING CAPACITY:
 22500 BTUH (6594W) @ 140-140°F (60°C-60°C)
 18200 BTUH (5334W) @ 95-95°F (35°C-35°C)
 MAXIMUM AMPS: 16.96 (3731W) @ 220V/50Hz
 MAXIMUM AMPS: 16.40 (3772W) @ 230V/60Hz
 MAXIMUM AMPS: 8.64 (4147W) @ 480V/50Hz
 MAXIMUM AMPS: 8.36 (4013W) @ 480V/60Hz
 MAXIMUM AMPS: 8.70 (3480W) @ 400V/50Hz
 MAXIMUM AMPS: 8.67 (3468W) @ 400V/60Hz
 MAXIMUM OPERATING TEMPERATURE: 140°F (60°C)
 DIMENSIONS: 44.060" (1119MM) H x 18.060" (459MM) W x 20.000" (508MM) D
 WEIGHT: 222 LBS (101KG) @ 220/230V
 WEIGHT: 274 LBS (125KG) @ 400/480V
 REFRIGERANT CHARGE-R407C 4LB (1814G)

REV	DESCRIPTION	CHG	DATE	APP	DATE	CN #
B	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	5/11/2018	ART	5/11/2018	1347
A	PRODUCTION RELEASE	ART	12/4/2017	JGG	12/4/2017	1331


ITEM NUMBER	N/A	USED ON	IQ20000EV
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	ART	DATE	12/4/2017
		SCALE	1:10

UNLESS OTHERWISE SPECIFIED TOLERANCES	
X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH	63
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
DESCRIPTION
 IQ20000EV SPEC DRAWING
DRAWING NUMBER
 IQ351563
REV
 B

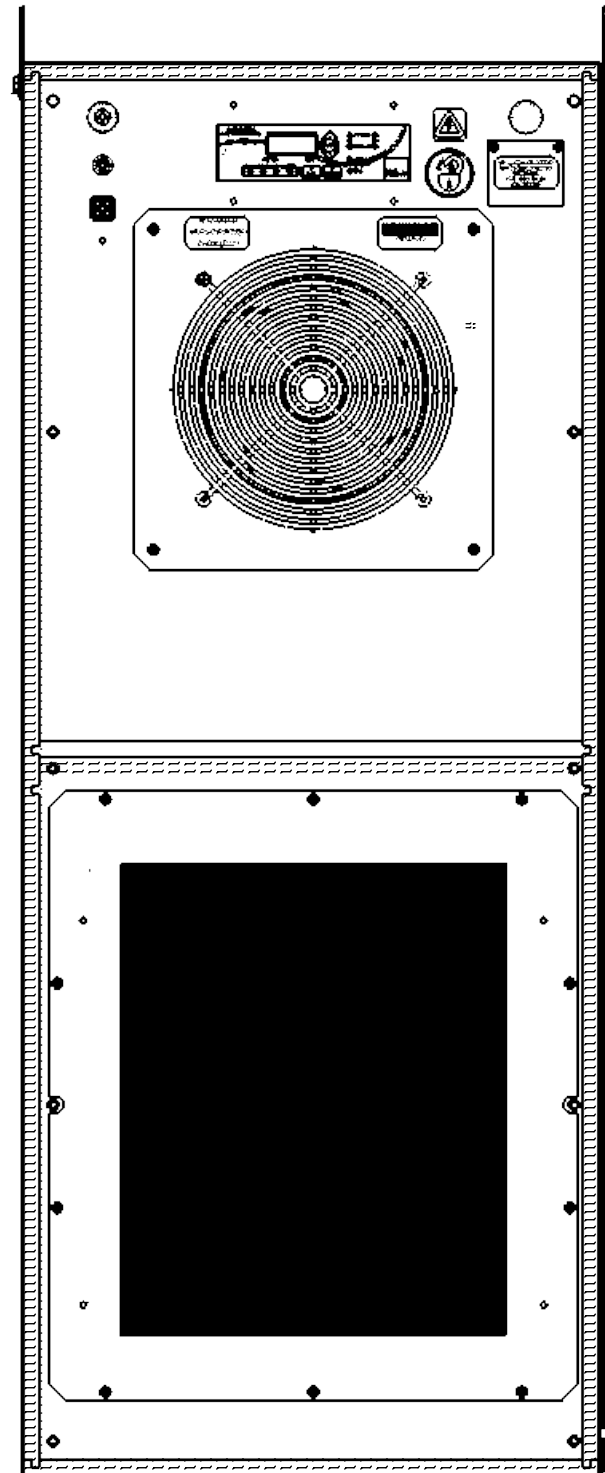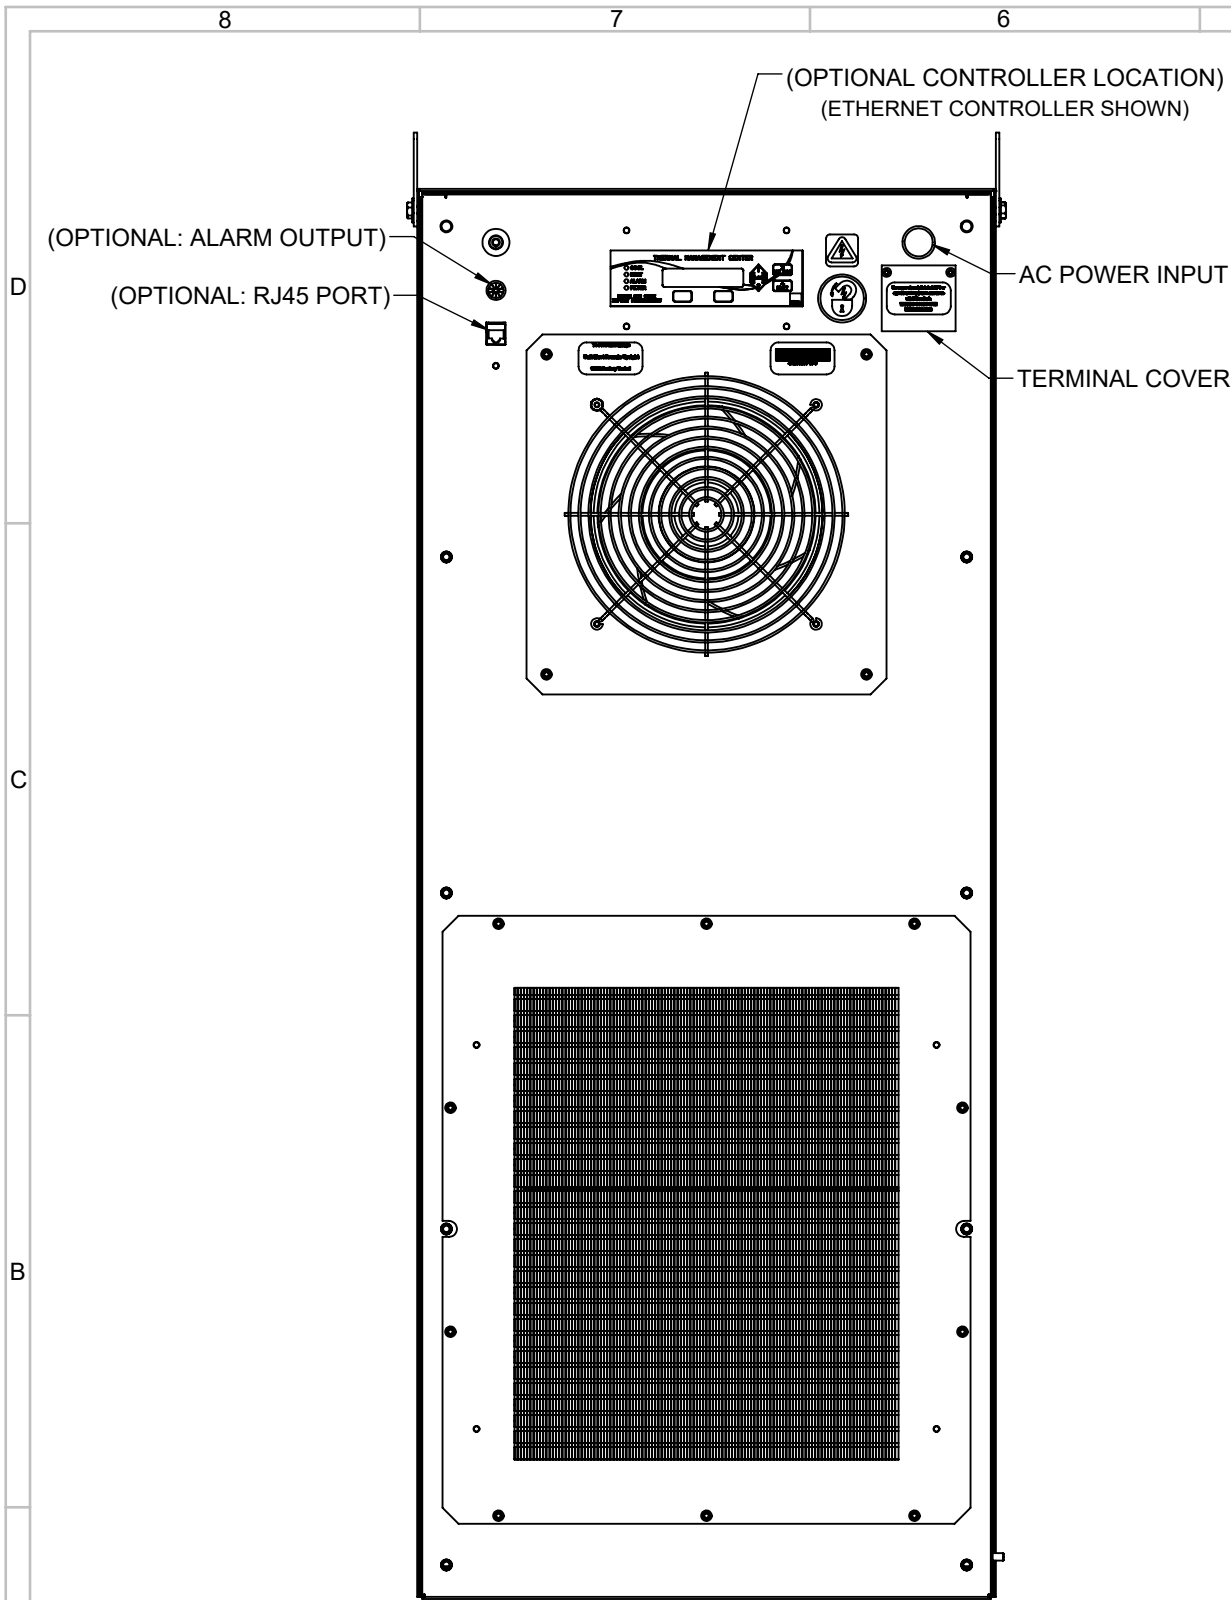

IMPORTANT
GASKET MUST BE APPLIED AS SHOWN FOR PROPER OPERATION AND TO MAINTAIN ENCLOSURE INTEGRITY

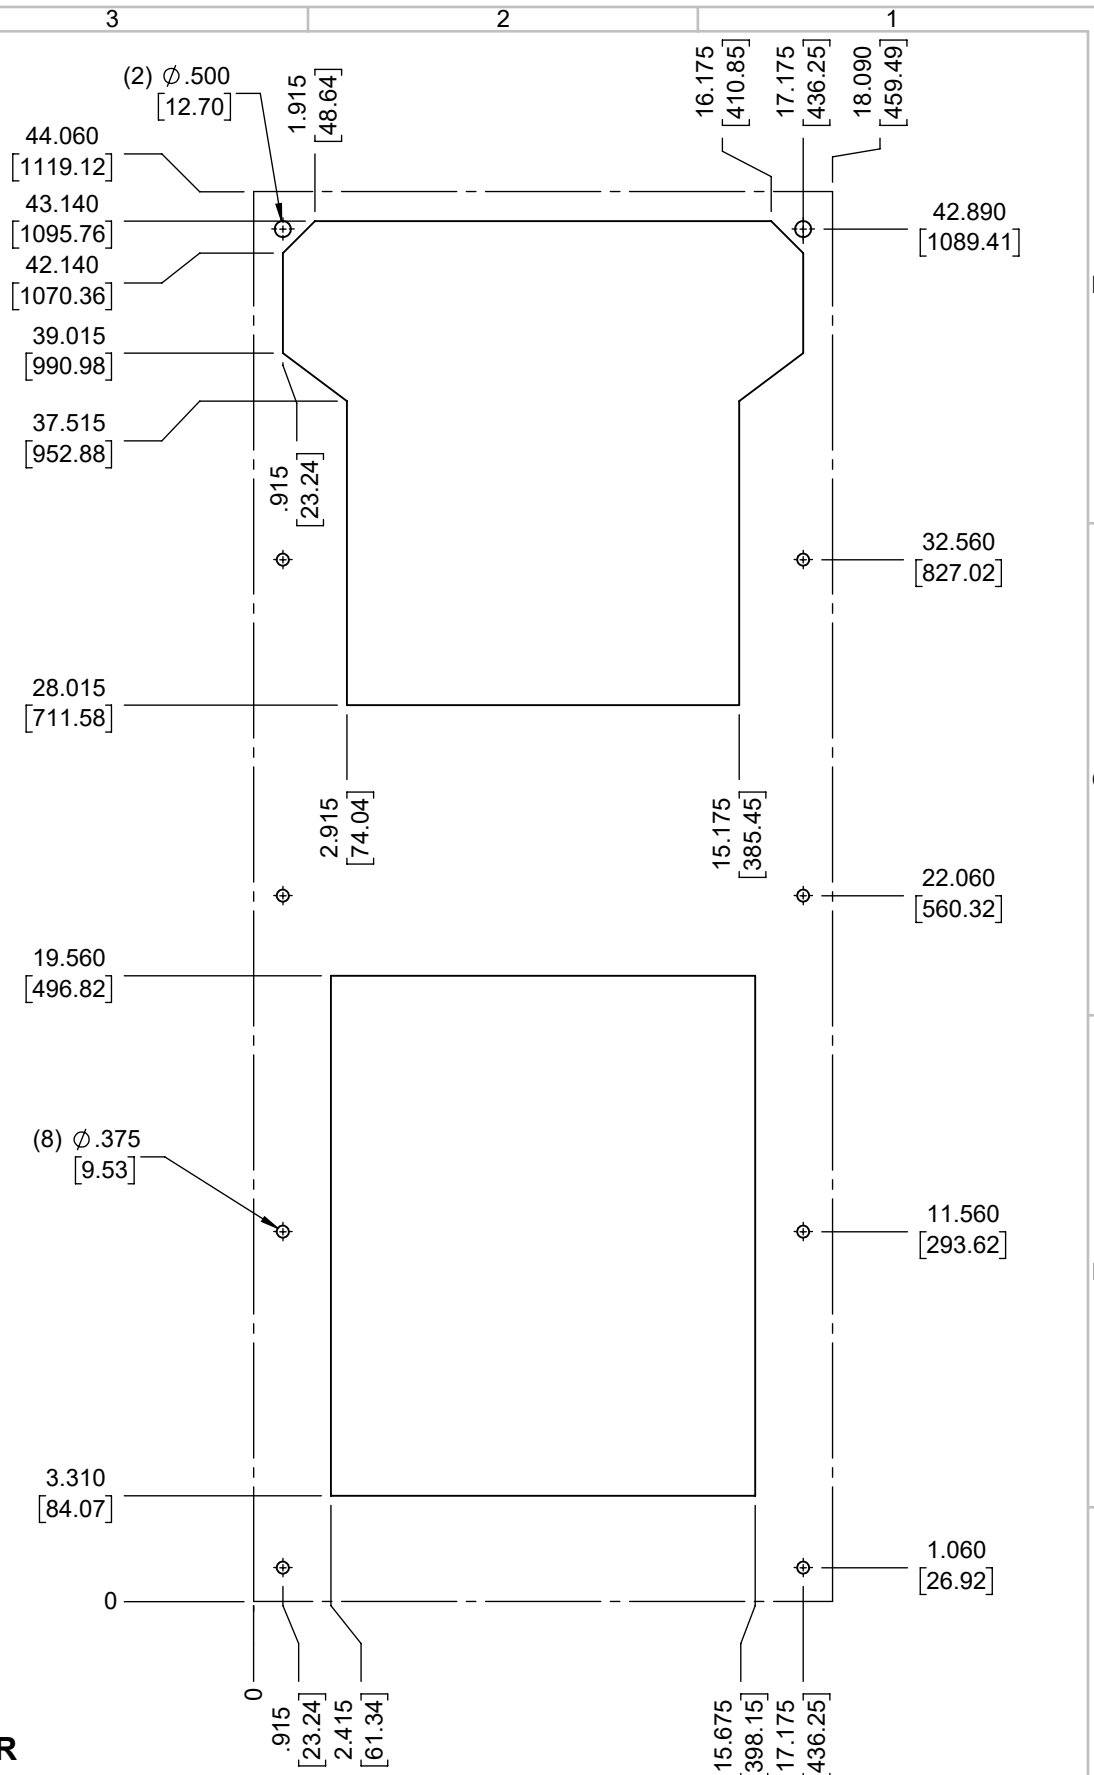

EVAP. OUTLET \approx 800 CFM
 COND. OUTLET \approx 1100 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 65 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 70 dBA
 CONDENSER INLET MIN. CLEARANCE 3.76"

ITEM NUMBER N/A	USED ON IQ20000EV
MATERIAL N/A	
EST WT: lbs	
DRAWN BY ART	DATE 12/4/2017
	SCALE 1:6

UNLESS OTHERWISE SPECIFIED TOLERANCES
X \pm .060
.XX \pm .030
.XXX \pm .015
FRACTIONAL \pm 1/4
ANGULAR \pm 1/2°
SURFACE FINISH $\sqrt{63}$
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.

DESCRIPTION
IQ20000EV SPEC DRAWING

DRAWING NUMBER
IQ351563

REV
B