
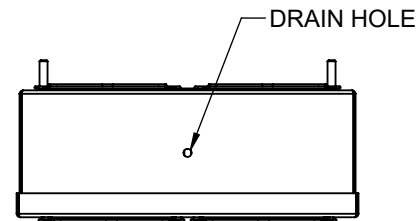
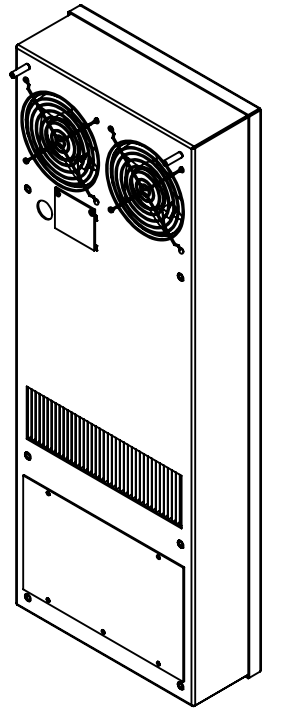


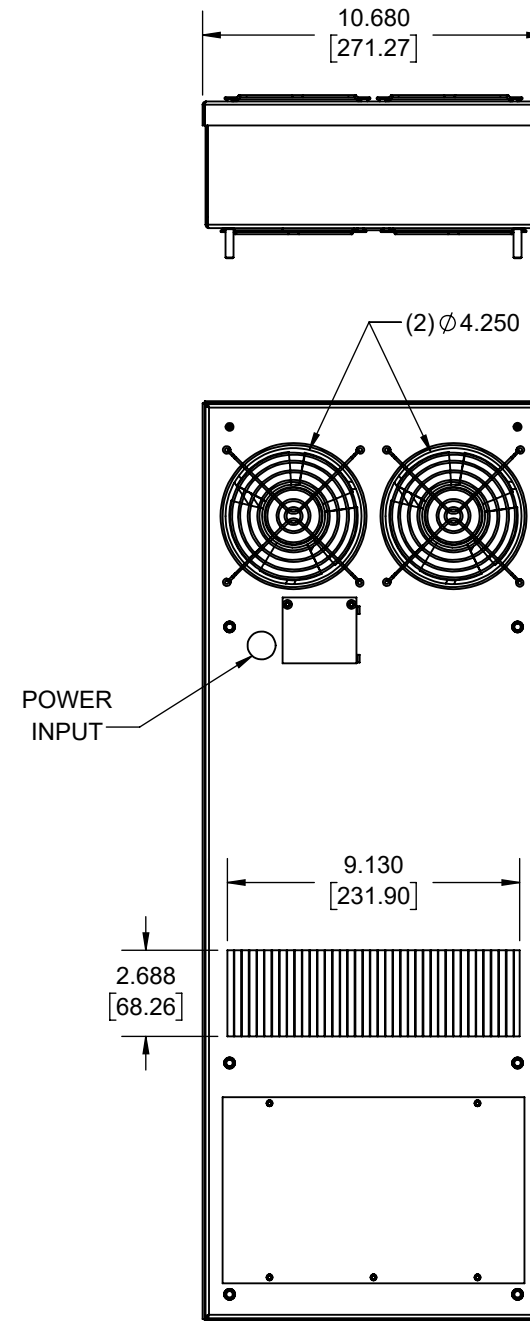
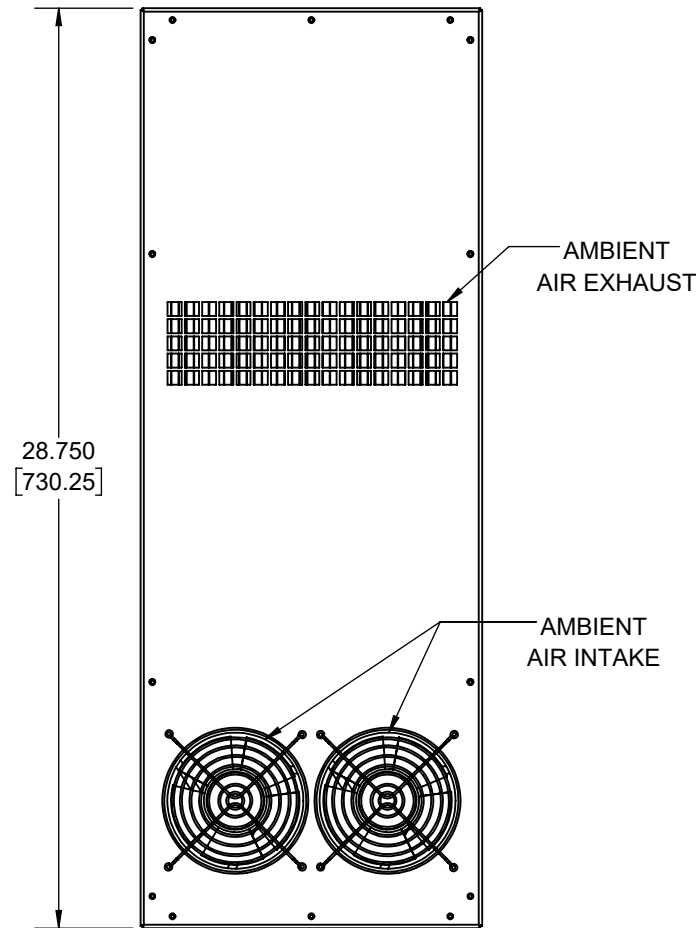
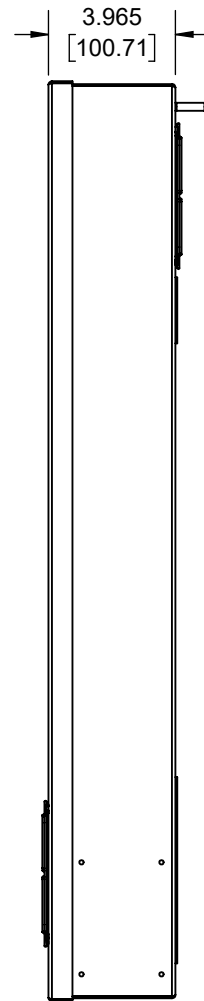


IQ900HE-Z2 ZONE 2 ATEX IECEX CERTIFIED

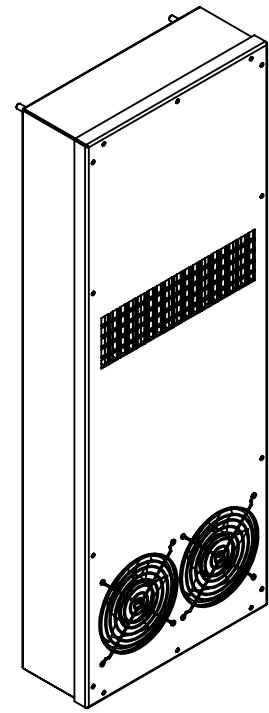

IQ900HE-Z2
 CE 0539 II 3 G Ex nA nC IIC T6 Gc
 COOLING CAPACITY: 7.4 WATTS/°F
 MAXIMUM AMPS: 1.00A (120W) @ 120V/60HZ
 MAXIMUM AMPS: 0.50/0.70A (115/161W) @ 230V 60/50HZ
 MAXIMUM AMPS: 2.26A (54.2W) @ 24VDC
 MAXIMUM AMPS: 1.12A (53.8W) @ 48VDC
 MAINTAINS IP66 BETWEEN EQUIPMENT AND ENCLOSURE
 OPERATING TEMPERATURE: -40° - +60°C (T CODE: T6 @ 24/48VDC & 120/230VAC)
 OPERATING TEMPERATURE: -40° - +70°C (T CODE: T5 @ 24/48VDC & 120/230VAC)
 OPERATING TEMPERATURE: -40° - +80°C (T CODE: T4 @ 120/230VAC)
 DIMENSIONS: 28.75" (730MM) H X 10.68" (271MM) W X 3.96" (101MM) D
 WEIGHT: 34 LBS (15.4KG)

REV	CHG	DATE	APP	DATE	CN #
B		4/4/2019	RCC		
A		1/21/2019	RCC		

ITEM NUMBER N/A	USED ON IQ900HE-Z2
MATERIAL N/A	
EST WT: lbs	
DRAWN BY RCC	DATE 1/21/2019
	SCALE 1:6

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH ⁶³	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.

THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.

DESCRIPTION
IQ900HE-Z2 SPEC DRAWING

DRAWING NUMBER
IQ352106

REV
B

