

D

D

C









C

B

B


A

A

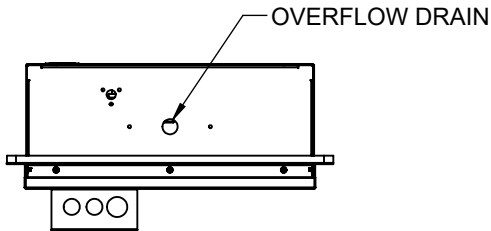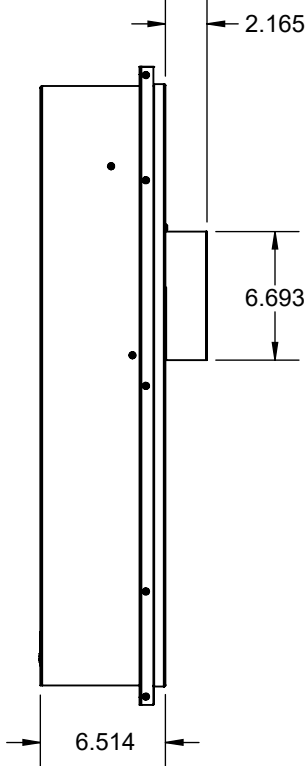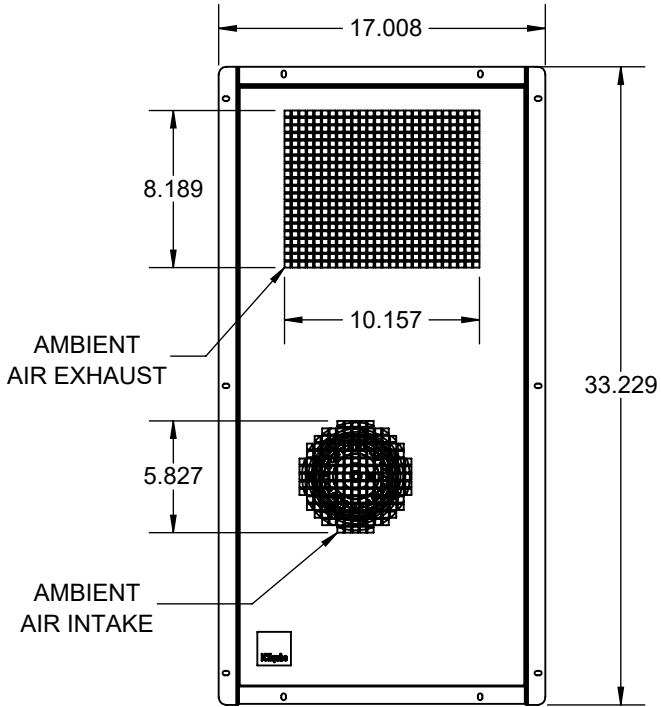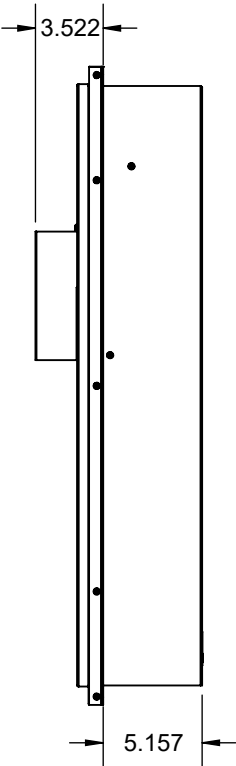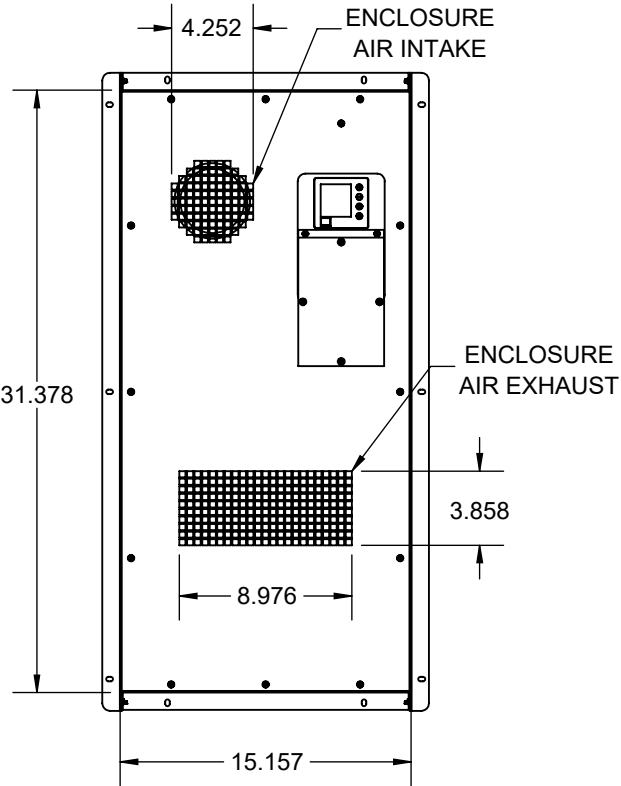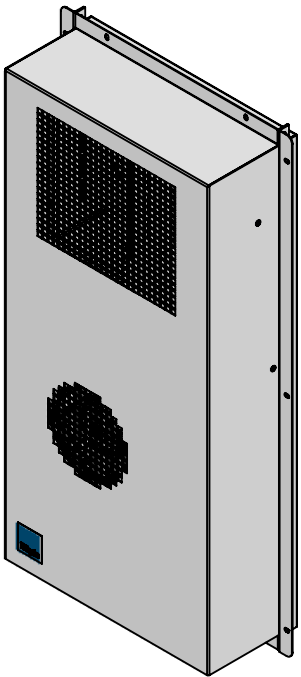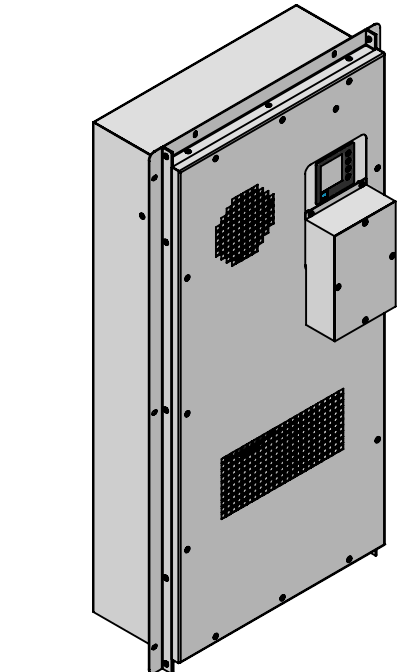

MODEL: **IQ3500BDC**
COOLING CAPACITY: 3412 BTU (1000W)
HEATING CAPACITY: 1365 BTU (400W)
OPERATING CURRENT: 8.2A (394W) @ 48VDC @ 95°F (35°C)
OPERATING TEMPERATURE RANGE: -40°F TO 131°F (-40°C TO 55°C) WITH LA PACKAGE
DIMENSIONS W/O FLANGES: 31.38" H (797MM) X 15.16" W (385MM) X 6.50" D (165MM)
DIMENSIONS W/ FLANGES: 33.23" H (844MM) X 17.01" W (432MM) X 6.50" D (165MM)
MAXIMUM SOUND LEVEL @ 5FT FROM UNIT @ A HT. OF 3FT: 60 dBA
MAXIMUM SOUND LEVEL @ 2FT FROM UNIT @ A HT. OF 5FT: 62.8 dBA
WEIGHT: 59.5 LBS (27KG)
REFRIGERANT: R134a

ITEM NUMBER N/A							USED ON IQ3500BDC		UNLESS OTHERWISE SPECIFIED TOLERANCES .X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/16 ANGULAR ±1/2° SURFACE FINISH 63		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
MATERIAL N/A							EST WT: lbs		DRAWN BY NAT		DATE 9/28/2020	
SCALE 1:8							DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		DESCRIPTION SPEC DRAWING		DRAWING NUMBER IQ352497	
REV							A		INITIAL DRAFT		NAT	
REV							CHG		REVISION		DATE	
APP							DATE		CN #		REV	
A							A		A		A	

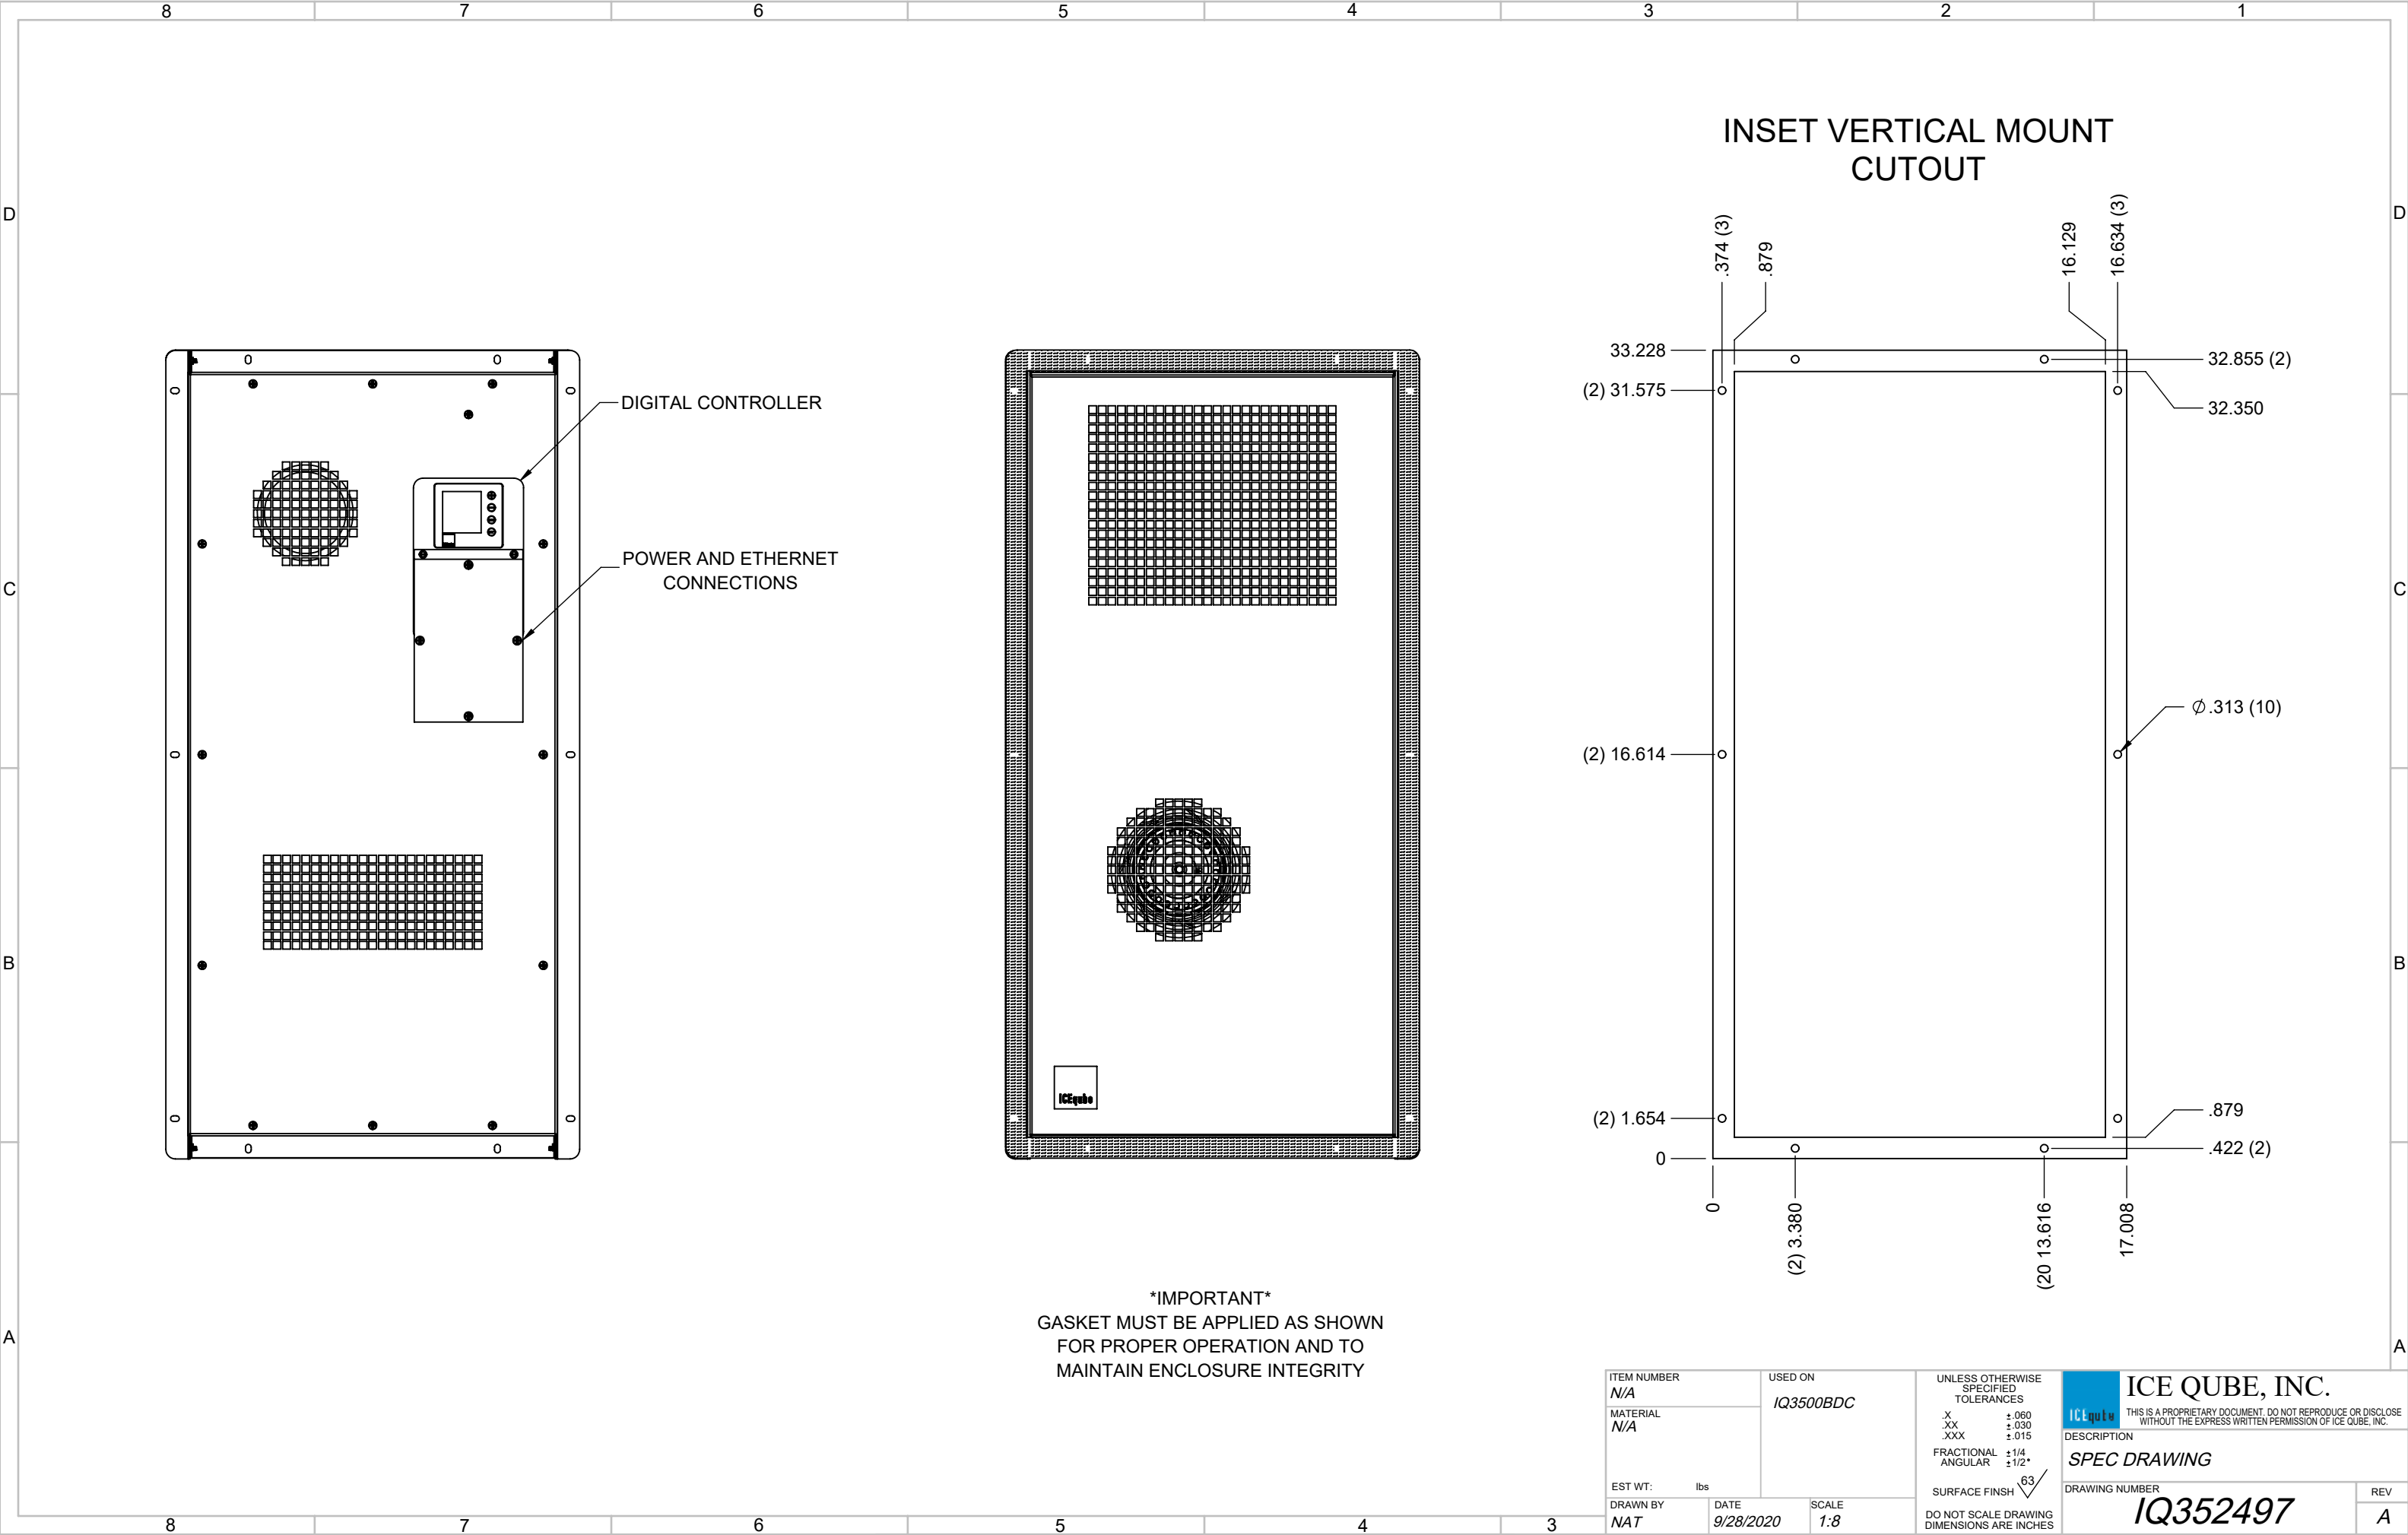

IMPORTANT
GASKET MUST BE APPLIED AS SHOWN
FOR PROPER OPERATION AND TO
MAINTAIN ENCLOSURE INTEGRITY

ITEM NUMBER <i>N/A</i>		USED ON <i>IQ3500BDC</i>		UNLESS OTHERWISE SPECIFIED TOLERANCES .X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
MATERIAL <i>N/A</i>		EST WT: lbs		SURFACE FINISH 63		DESCRIPTION <i>SPEC DRAWING</i>	
DRAWN BY <i>NAT</i>		DATE <i>9/28/2020</i>		SCALE <i>1:8</i>		DRAWING NUMBER <i>IQ352497</i>	
						REV <i>A</i>	