

IQ12000V
 COOLING CAPACITY: 12000 BTUH (3519W) @131°F (55°C)
 MAXIMUM AMPS: 19.6 (2352W) @120V/60HZ
 MAXIMUM AMPS: 9.8/10.8 (2254/2484W) @230V/60/50HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 DIMENSIONS: 52.13" (1324MM) H X 17.65" (448MM) W X 10.34" (263MM) D
 WEIGHT: 159 LBS (72.3KG)



REV	REVISION	CHG	DATE	APP	DATE	CN #
B	ADDED 50HZ TO 230V AND WATTAGE INFO	RCC	12/26/2017			
A	REDRAWN IN SW	RCC	4/5/2017			

ITEM NUMBER	N/A
MATERIAL	N/A
EST WT:	lbs
DRAWN BY	RCC


USED ON	IQ12000V
DATE	4/5/2017
SCALE	1:11

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH $\sqrt{63}$	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ12000V SPEC DRAWING XP2
 DRAWING NUMBER
IQ351393
 REV
B

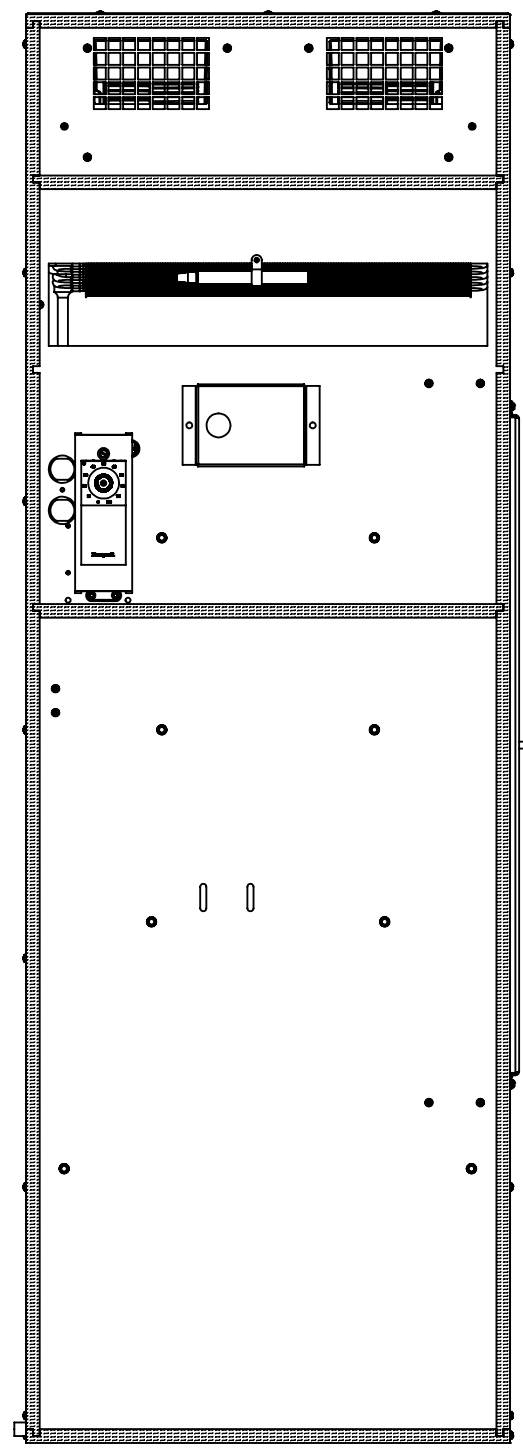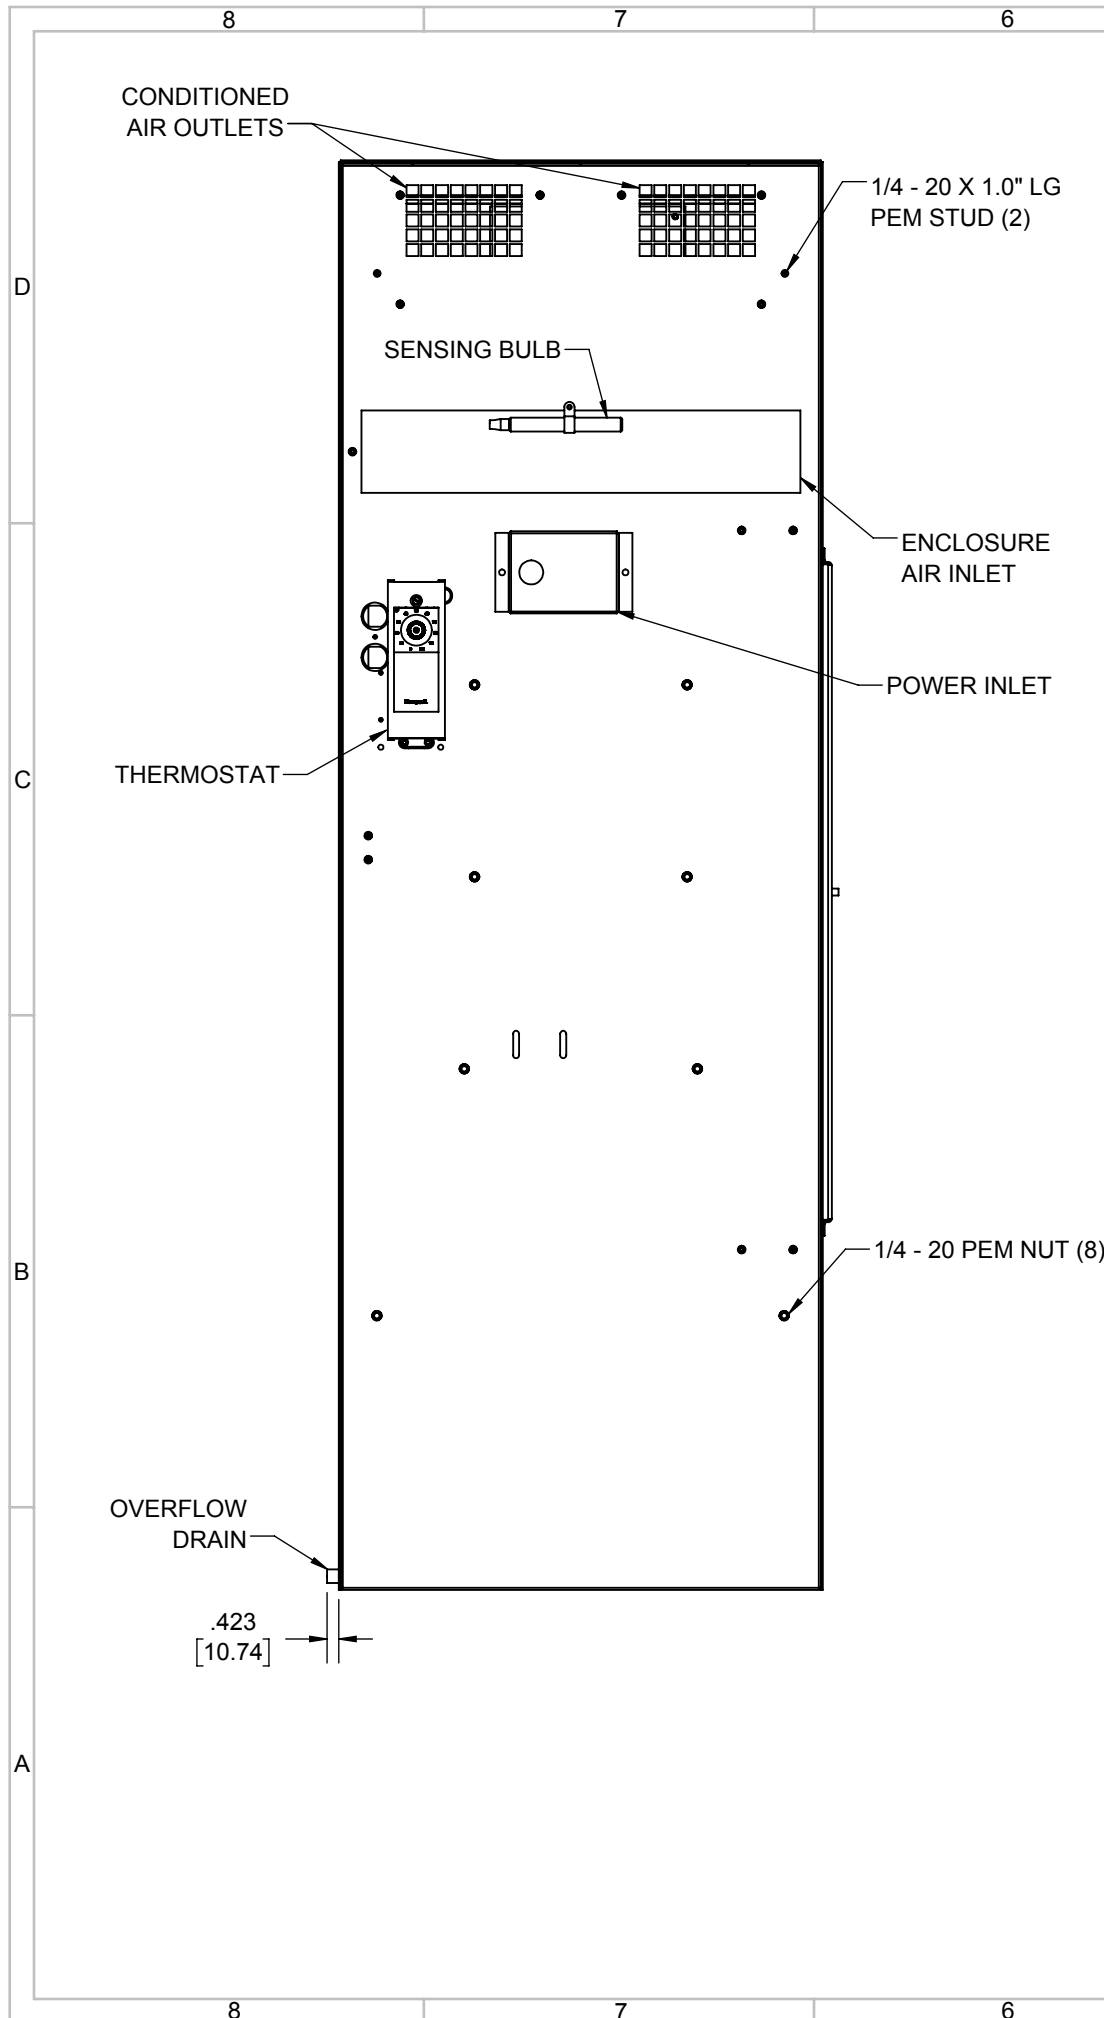

IMPORTANT
 GASKET MUST BE
 APPLIED AS SHOWN
 FOR PROPER OPERATION
 AND TO MAINTAIN
 NEMA INTEGRITY.

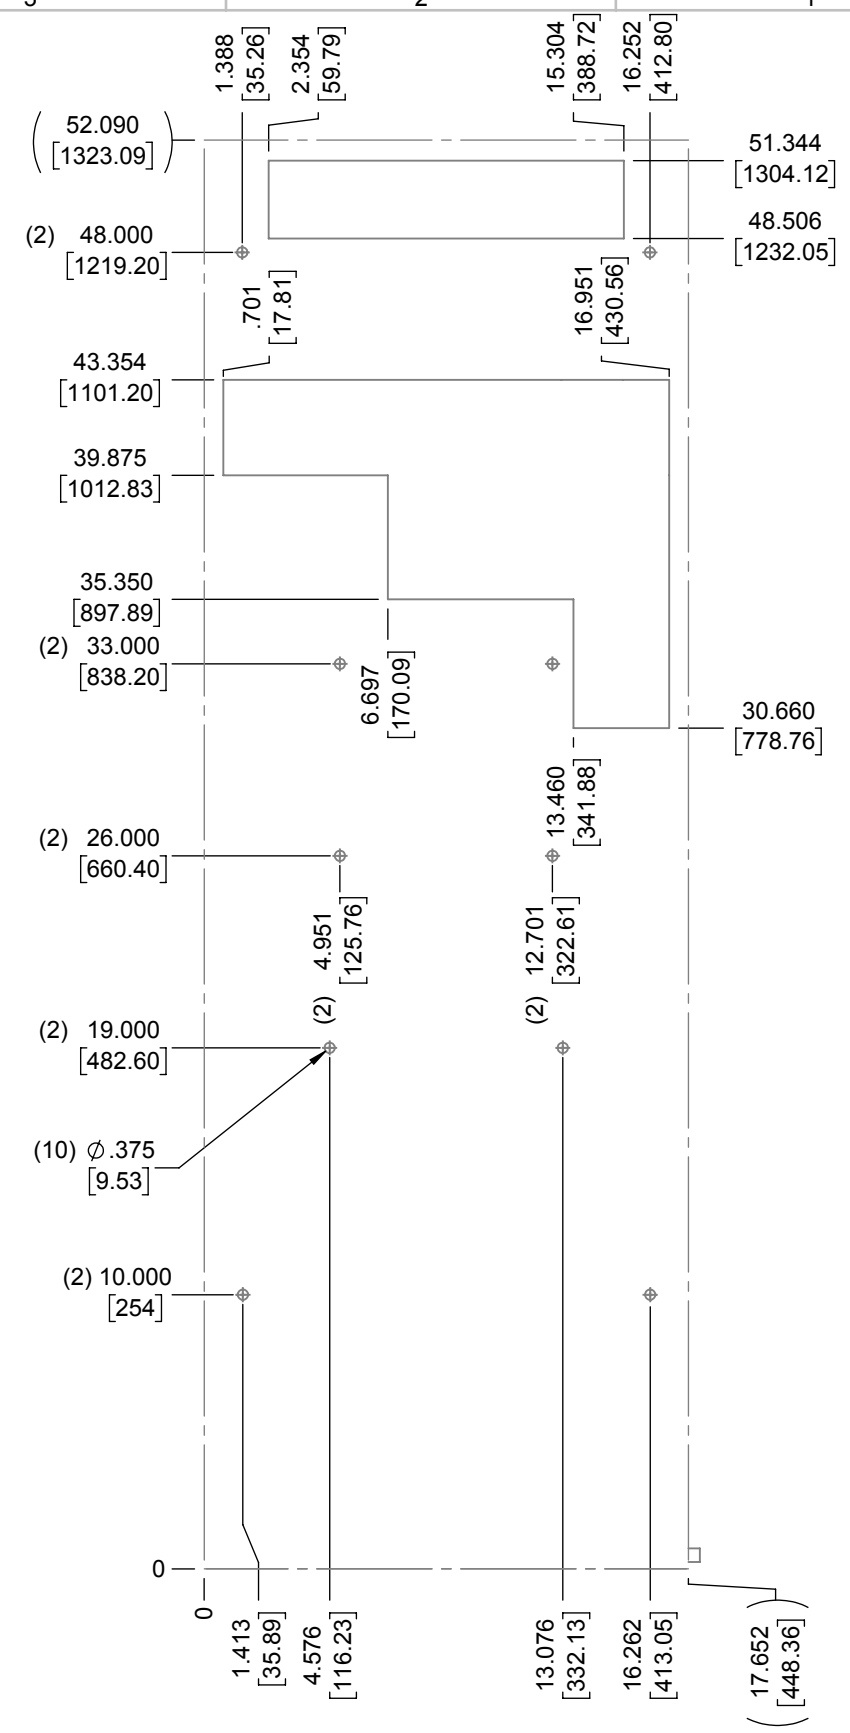

ITEM NUMBER N/A	USED ON IQ12000V	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015	 <small>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</small>
MATERIAL N/A		FRACTIONAL ±1/4 ANGULAR ±1/2°	
EST WT: lbs	SCALE 1:7	SURFACE FINISH 63	DESCRIPTION IQ12000V SPEC DRAWING XP2
DRAWN BY RCC	DATE 4/5/2017	DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	DRAWING NUMBER IQ351393
			REV B