


**MODEL : IQ12000 ECO**  
 NOMINAL COOLING CAPACITY :  
 12309 BTUH (3607W) @ 131-131°F (55°-55°C)  
 12255 BTUH (3592W) @ 95-95°F (35°-35°C)  
 MAX COOLING AMPS 21.93 (2631W) @ 120V/60Hz  
 MAX COOLING AMPS 10.9 (2507W) @ 230V/60Hz  
 MAX COOLING AMPS 10.8 (2376W) @ 220V/50Hz  
**HEAT COMING SOON**  
 MAX OPERATION TEMPERATURE : 131°F (55°C)  
 DIMENSIONS : 38.594"(980MM) H x 11.240"(285MM) W x 14.417"(366MM) D  
 DIMENSIONS : 38.594"(980MM) H x 11.715"(298MM) W x 14.417"(366MM) D; W/ FILTER COVER  
 WEIGHT : 132 LBS. (59.9 KG)  
 REFRIGERANT CHARGE : R407C 44 OZ (1247G) 120V/230V

ITEM NUMBER	N/A		USED ON	IQ12000 ECO	
MATERIAL	N/A				
EST WT:	lbs				
DRAWN BY	JWS	DATE	4/15/2021	SCALE	1:10
REV	INITIAL DRAFT	CHG	DATE	APP	DATE
	REVISION				CN #

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH	63
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

**ICE QUBE, INC.**  
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.  
**DESCRIPTION**  
 IQ12000 ECO SPEC DRAWING  
**DRAWING NUMBER**  
 IQ352701  
**REV**  
 A

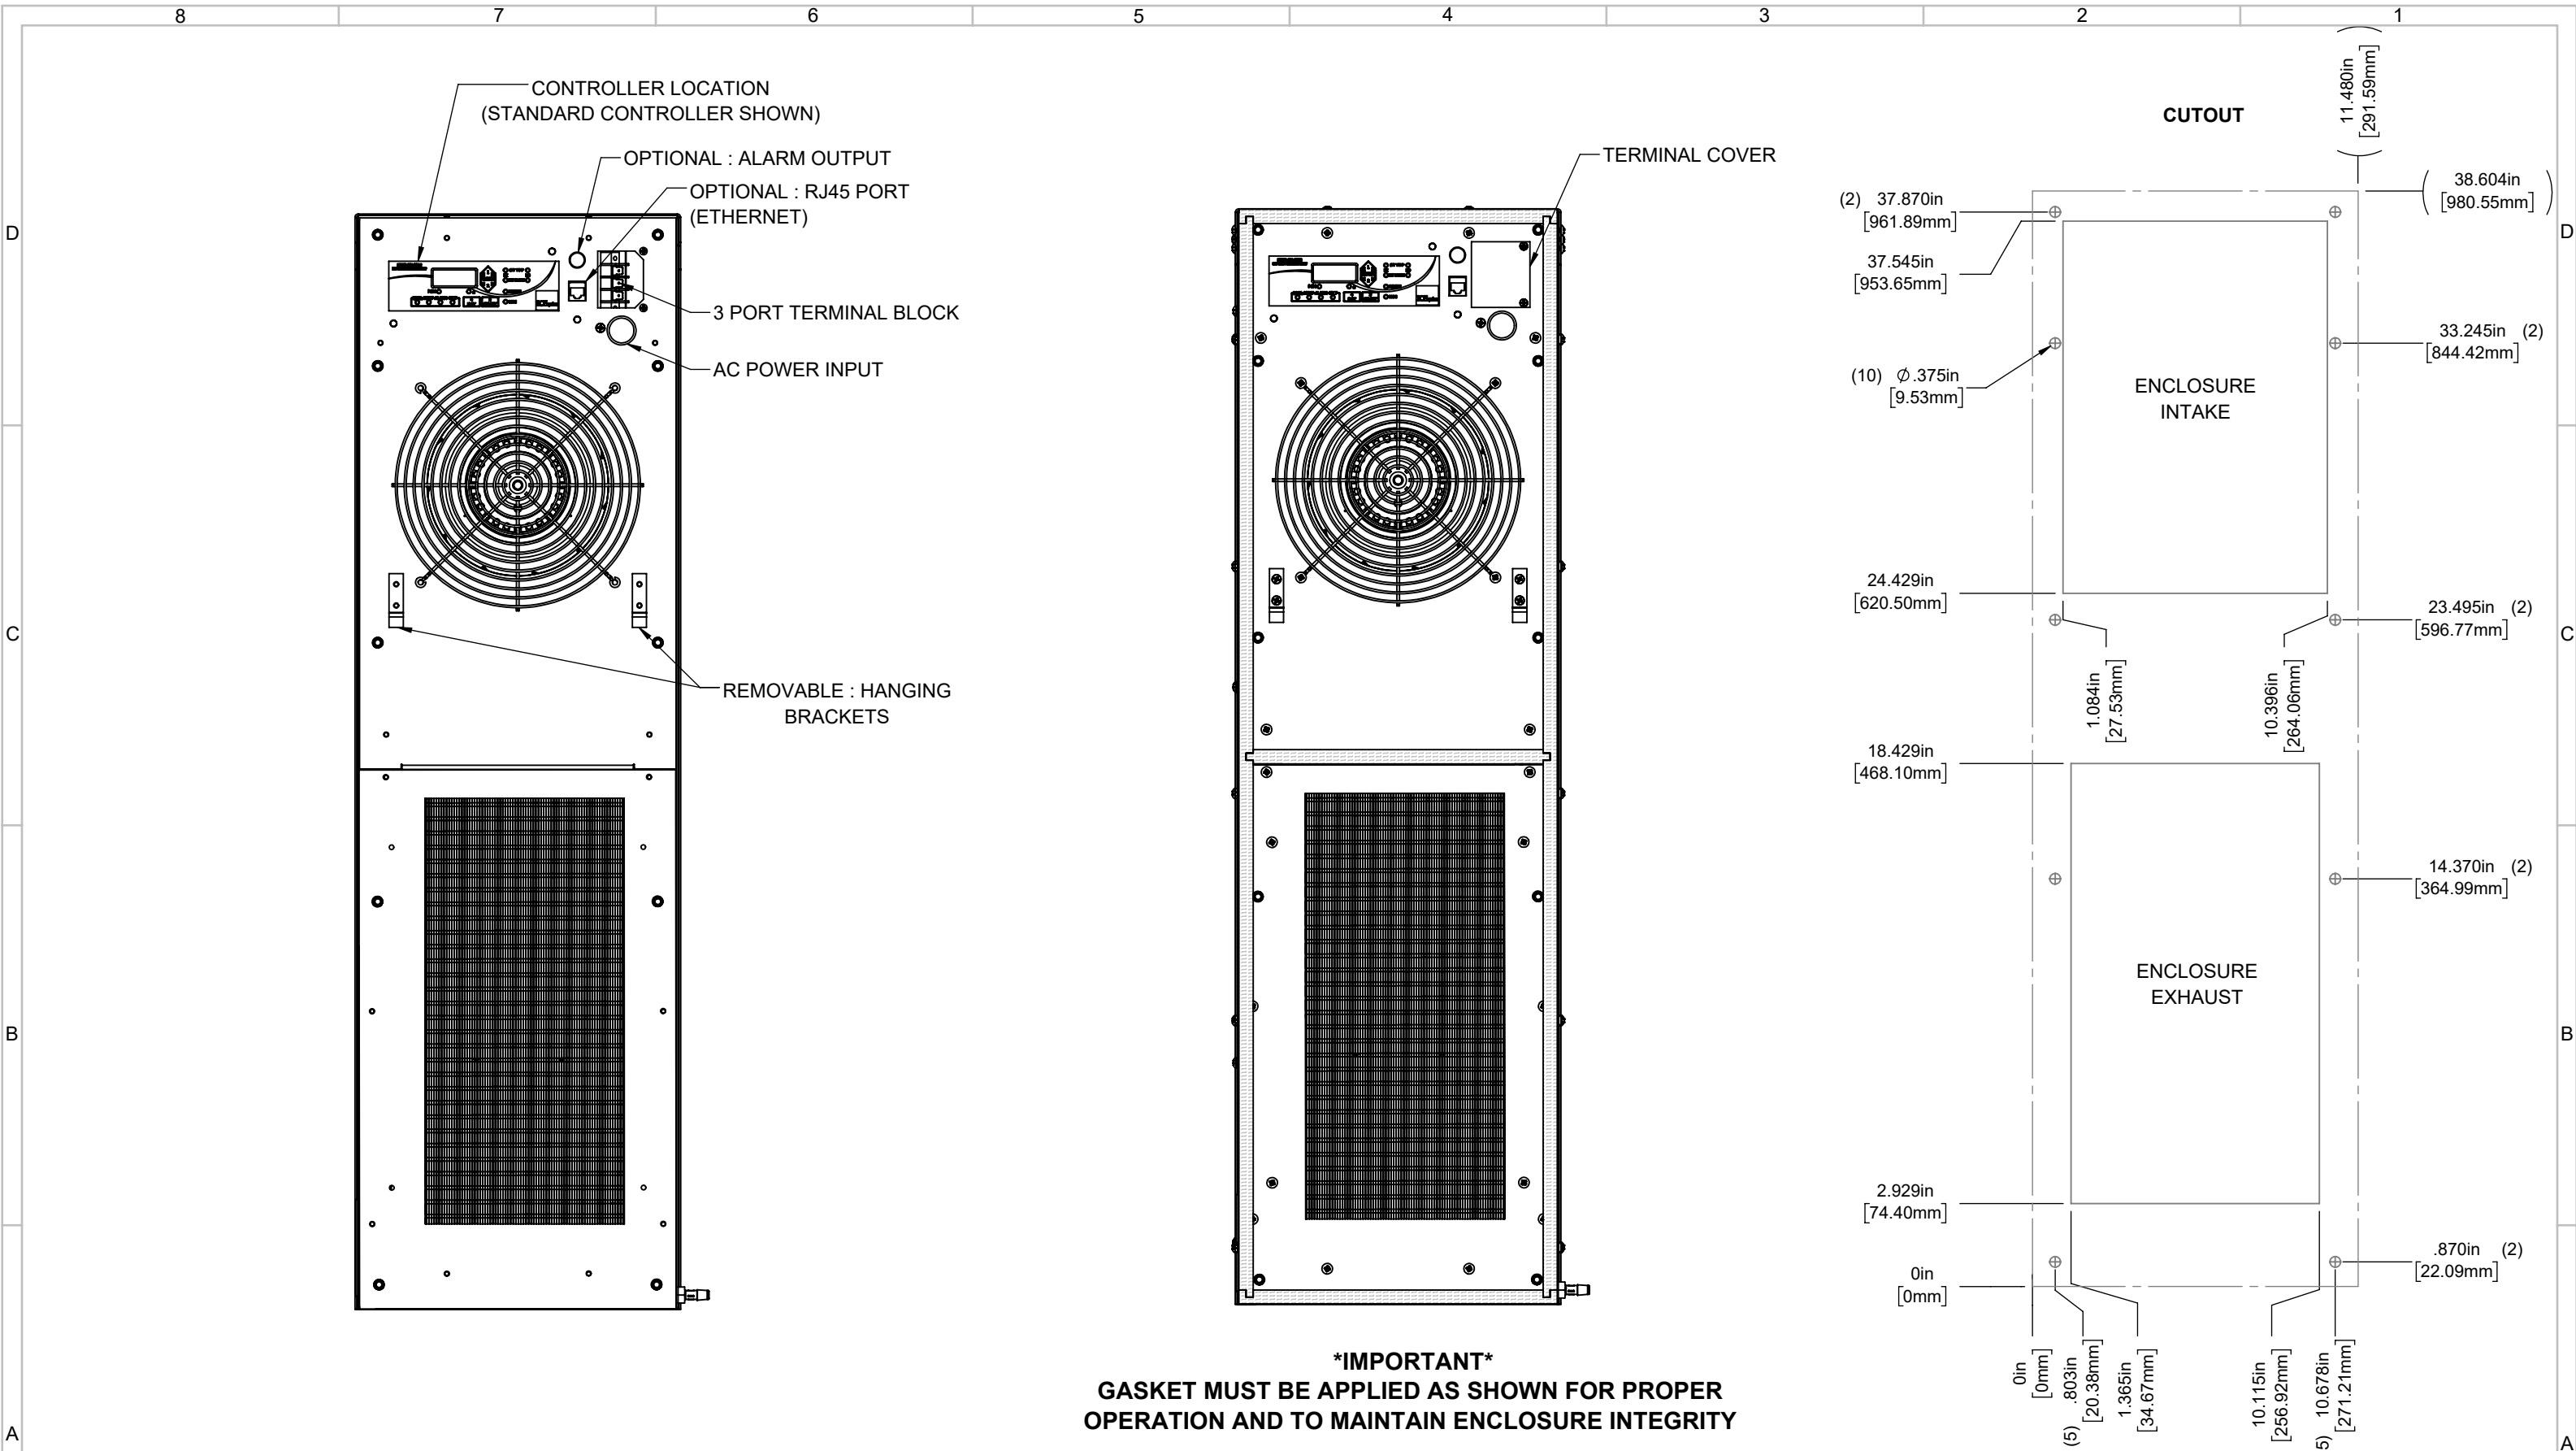

**\*IMPORTANT\***  
**GASKET MUST BE APPLIED AS SHOWN FOR PROPER OPERATION AND TO MAINTAIN ENCLOSURE INTEGRITY**

EVAP. OUTLET  $\approx$  525 CFM  
 COND. OUTLET  $\approx$  760 CFM  
 SOUND LEVEL @5FT FROM UNIT @ HT. OF 3 FT = 69dBA  
 SOUND LEVEL @2FT FROM UNIT @ HT. OF 5 FT = 71dBA  
 CONDENSER INLET MIN CLEARANCE 2.54"

ITEM NUMBER N/A	USED ON IQ8000 ECO IQ10000 ECO IQ12000 ECO	UNLESS OTHERWISE SPECIFIED TOLERANCES X $\pm$ .060 .XX $\pm$ .030 .XXX $\pm$ .015	<p>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>
MATERIAL N/A		FRACTIONAL ANGULAR $\pm$ 1/4 $\pm$ 1/2*	
EST WT: lbs	SCALE 1:12	SURFACE FINISH 63	DESCRIPTION IQ12000 ECO SPEC DRAWING
DRAWN BY JWS	DATE 4/15/2021	DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	DRAWING NUMBER IQ352701
			REV A