

For enclosure or panel cooling, our exclusive use of a rotary compressor allows us to manufacture the smallest, lightest weight, most energy efficient cooling solutions in the industry.

Standard Features

- Digital temperature controller with alarm
- Built-in condensate evaporator
- Durable 16 gauge welded steel construction
- Efficient, quiet, long lasting rotary compressor
- Environment friendly HFC refrigerant
- Easy pull-out filter
- UL Listed
- Space saving aesthetic cabinet design
- Designed to mount on side of enclosure while maintaining NEMA type 12, 3R, 4, or 4X integrity





Options & Accessories

- Stainless Steel
- Remote Controller Kit
- Replacement Filters
- Corrosive Packages
- Crankcase Heater
- Low Ambient
- External Heat Output
- Internal Heat Output
- Alarm Output

Technical Data

Model	BTU	Volts	Max Amps	Weight (lbs.)	Dimensions
IQ5500VS-126	5500	120/60	10.1	75	30.09"H x 12.27"W x 10.39"D
IQ5500VS-236	5500	230/60/50	5.0/5.5	75	30.09"H x 12.27"W x 10.39"D
IQ6000VS-126	6000	120/60	8.0	77	30.09"H x 12.27"W x 10.39"D
IQ6000VS-236	6000	230/60/50	4.0/4.4	77	30.09"H x 12.27"W x 10.39"D

IQ5500VS Capacity Chart

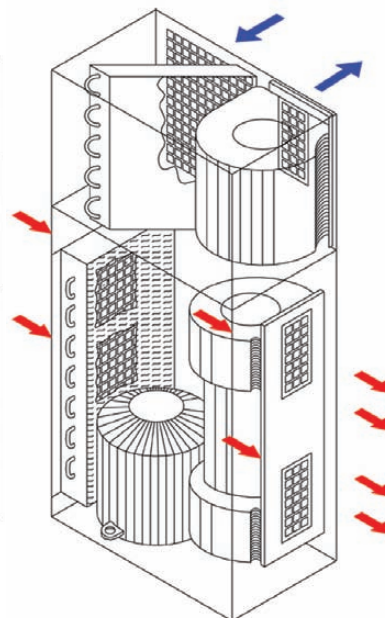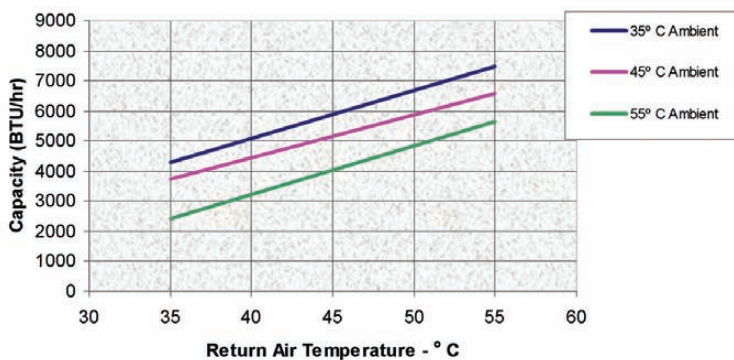

Conditioned Enclosure Air Flow

Ambient Air Flow

- Specification
Drawings


5,500
6,000
BTUH

Vertical Mount
Slim
Air Conditioners


ICEcube

Drawings are for illustration purposes only. Data is subject to change.


TOP VIEW




LEFT SIDE

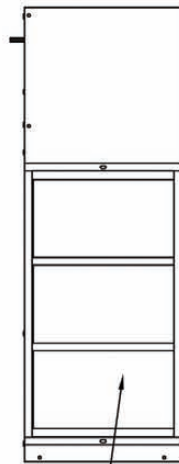


RIGHT SIDE
5500VS

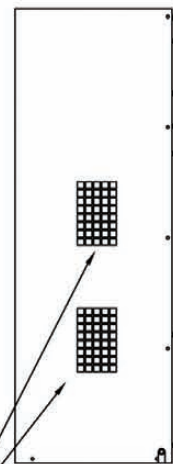

RIGHT SIDE
6000VS

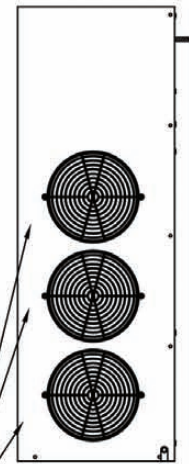

FRONT VIEW

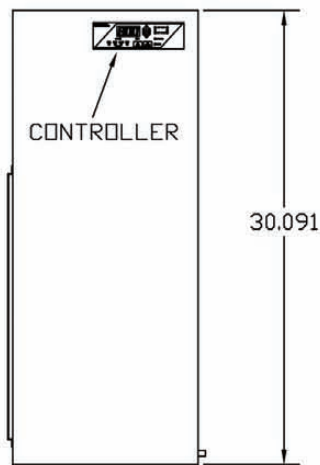


CONDENSER
AIR INLET


CONDENSER
AIR OUTLETS

CONDENSER
AIR OUTLETS


CUTOUT DRAWING

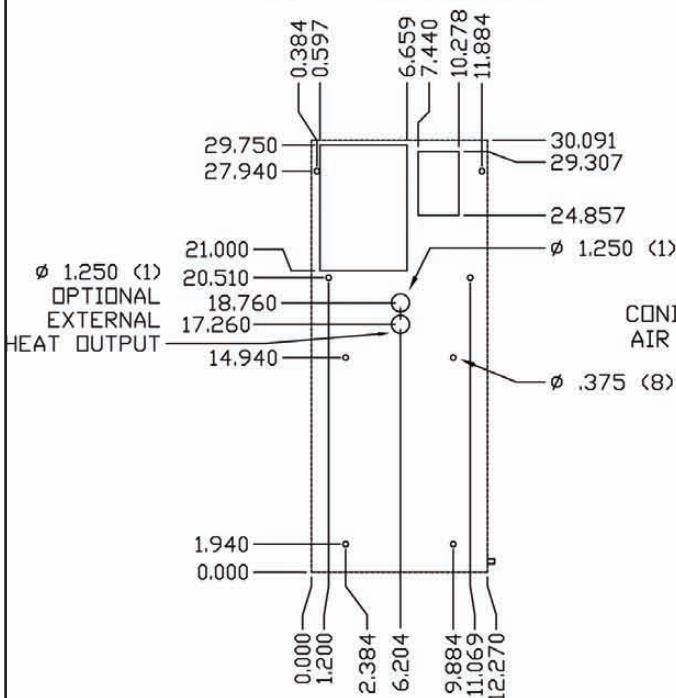

GASKET DRAWING

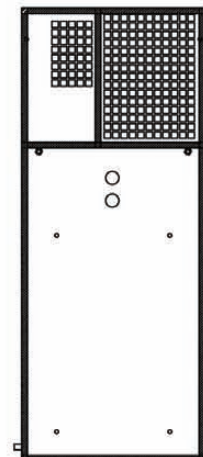

REAR VIEW

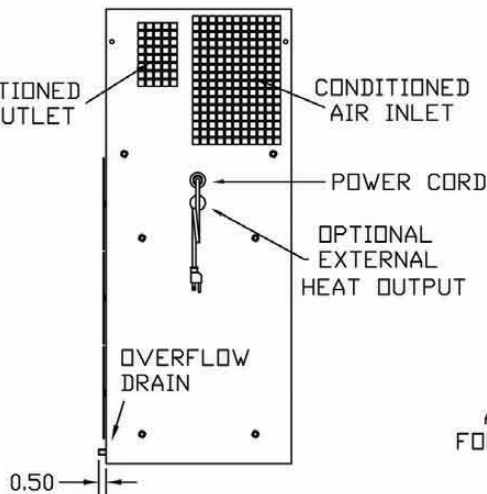

IMPORTANT
GASKET MUST BE
APPLIED AS SHOWN
FOR PROPER OPERATION
AND TO MAINTAIN
NEMA INTEGRITY.