Vertical Mount Extra Slim

2,000 & 2,400 BTUH - 120/230/480 VAC Air Conditioners

ICEqube™
Cooling Solutions

Standard Features
Options
Technical Data
Air Flow

For enclosure or panel cooling, Our exclusive use of a rotary compressor allows us to manufacture the smallest, lightest weight, most energy efficient cooling solutions in the industry.

Standard Features

- Digital temperature controller with alarm.
- Built-in condensate evaporator.
- Durable 16 gauge welded steel construction.
- Efficient, quiet, long lasting rotary compressor.
- Environment friendly HFC refrigerant.
- Easy pull-out filter.
- UL Listed.
- Space saving aesthetic cabinet design.
- Designed to mount on side of enclosure while maintaining NEMA type 12, 3R, 4, or 4X integrity.

Options & Accessories

- Stainless Steel
- Remote Controller Kit
- Replacement Filters
- Corrosive Packages
- External Heat Output
- Internal Heat
- Alarm Output
- Crankcase Heater
- Low Ambient

Technical Data

2000, & 2400 BTU H

Model	BTU/Watts	Volts	Max Amps	Max Temp °F/°C	Weight (lbs/Kg)	Dimensions (In/mm)
IQ2000VXS	2000/586	120/60	6.6	131/55c	60 / 27.2	H 24.0" (610mm) x W 10.0" (254mm) x D 10.0" (254mm)
IQ2000VXS	2000/586	230/60	3.4	131/55c	60 / 27.2	H 24.0" (610mm) x W 10.0" (254mm) x D 10.0" (254mm)
IQ2000VXS**	2000/586	480/60	1.6	131/55c	74 / 33.6	H 28.0" (711mm) x W 10.0" (254mm) x D 10.0" (254mm)
IQ2400VXS	2400/703	120/60	7.1	131/55c	60 / 27.2	H 24.0" (610mm) x W 10.0" (254mm) x D 10.0" (254mm)
IQ2400VXS	2400/703	230/60	3.5	131/55c	60 / 27.2	H 24.0" (610mm) x W 10.0" (254mm) x D 10.0" (254mm)
IQ2400VXS**	2400/703	480/60	1.7	131/55c	74 / 33.6	H 28.0" (711mm) x W 10.0" (254mm) x D 10.0" (254mm)

** Also available in 400V as non UL

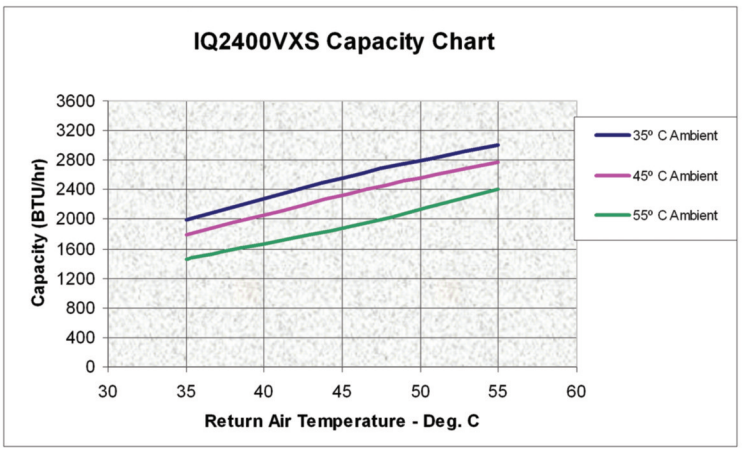

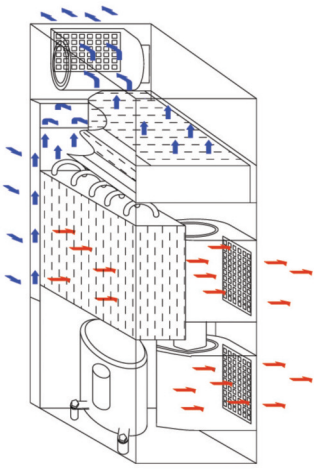

Conditioned Enclosure Air Flow

Ambient Air Flow

Ice Qube, Inc., 141 Wilson Ave., Greensburg, PA 15601 Call: 724.837.7600 Fax: 724.837.3386
www.iceqube.com Email: sales@iceqube.com